



Size: 93*93*30 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2493309S/B	S/B	24	0.60	4000	28.25	33.0	52.1	140
BD2493307S/B			0.45	3600	25.43	25.4	49.1	
BD2493305S/B			0.28	3200	22.60	19.0	46.0	
BD2493303S/B			0.16	2700	19.07	12.7	41.9	
BD1293309S/B		12	1.10	4000	28.25	33.0	52.1	
BD1293307S/B			0.80	3600	25.43	25.4	49.1	
BD1293305S/B			0.57	3200	22.60	19.0	46.0	
BD1293303S/B			0.32	2700	19.07	12.7	41.9	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

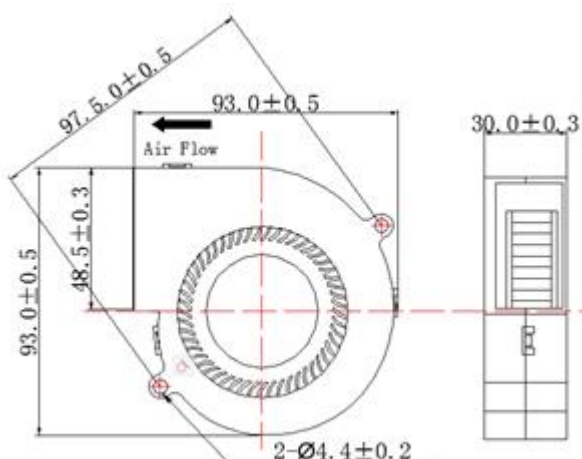

Characteristic Curve

