



Size:97*94*33 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature:-10℃ to +70℃




Major Characteristic Parameters



Model	Bearing Type	Rated Voltage	Current	Speed	Air Flow	Pressure	Noise	Weight
型号	轴承类型	额定电压	电流	转速	风量	风压	噪音	重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2497339S/B	S/B	24	0.48	5000	27.57	26.30	53.40	146
BD2497337S/B			0.37	4000	23.22	20.60	45.45	
BD2497335S/B			0.15	3000	18.87	16.74	36.90	
BD2497333S/B			0.08	2000	13.20	6.80	27.60	
BD1297339S/B		12	0.96	5000	27.57	26.30	53.40	
BD1297337S/B			0.65	4000	23.22	20.60	45.45	
BD1297335S/B			0.30	3000	18.87	16.74	36.90	
BD1297333S/B			0.15	2000	13.20	6.80	27.60	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

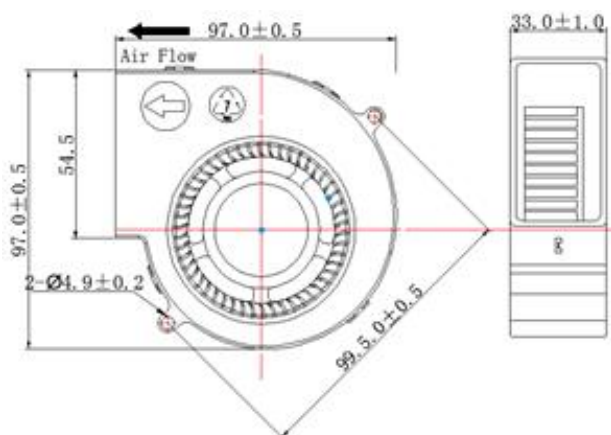

Characteristic Curve

