


Dimensions in “mm”

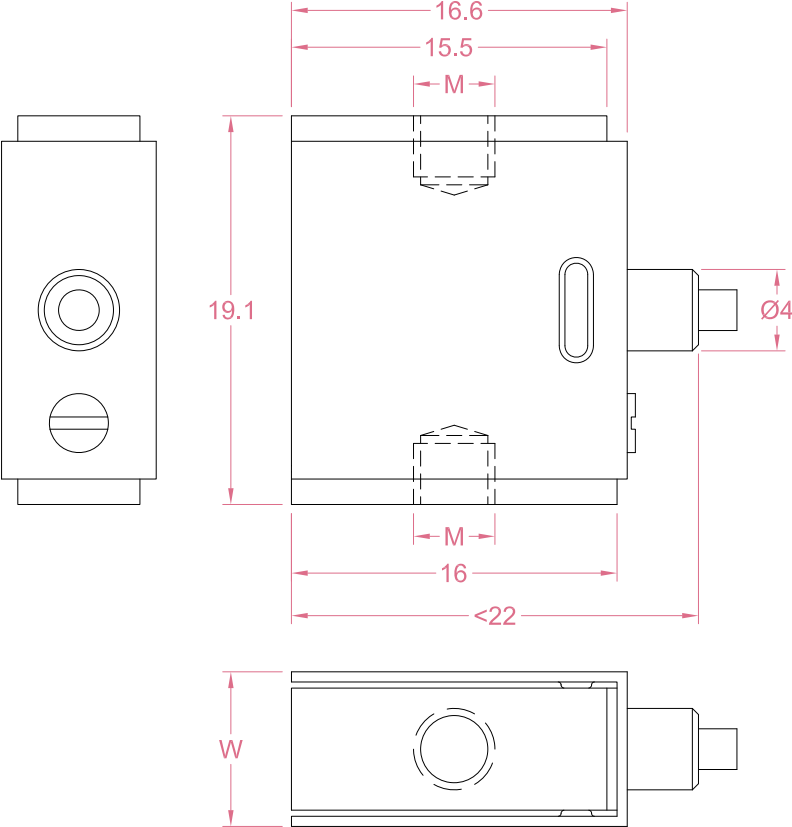

| Capacity            | W   | M           |
|---------------------|-----|-------------|
| 10/20N              | 6.8 | M3*0.5 DP 3 |
| 50/100/200/300/500N | 7.8 | M4*0.7 DP 3 |

Order example:

2 x LCS07 - 50N


Quantity      Model      Capacity

Email to [sales@loadcellsensor.com](mailto:sales@loadcellsensor.com) for a quote


| Specifications   |                                      |                       |                         |
|------------------|--------------------------------------|-----------------------|-------------------------|
| Rated Capacity   | 10/20/50/100/200/300/500 N           |                       |                         |
| Rated Output     | 2.0 mV/V                             | Compensated Temp.     | 0...+40°C               |
| Excitation       | 3~12V                                | Operating Temp.       | -20...+60°C             |
| Zero Balance     | ±0.1 mV/V                            | Temp. Coeff. of Zero  | ±0.02% F.S./°C          |
| Nonlinearity     | ±0.1% F.S.                           | Temp. Coeff. of Span  | ±0.02% F.S./°C          |
| Hysteresis       | ±0.1% F.S.                           | Input Resistance      | 380±30 Ohms             |
| Nonrepeatability | ±0.05% F.S.                          | Output Resistance     | 352±5 Ohms              |
| Creep(3min)      | ±0.05% F.S.                          | Insulation Resistance | >2000M Ohms(50V)        |
| Safe Load Limit  | 150% F.S.                            | IP Rating             | IP50<br>(IP65 optional) |
| Breaking Load    | 200% F.S.                            | Element Material      | Stainless steel         |
| Cable            | Ø2*4000mm 4-conductor shielded cable |                       |                         |

• LCS reserves the right to modify its design and specifications without notice

Load direction

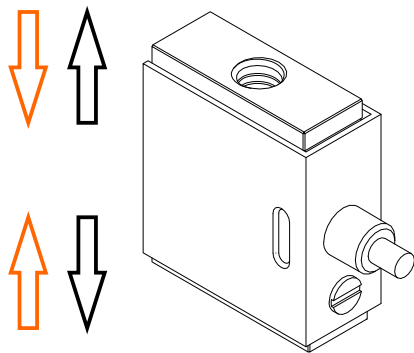

Wiring Code@Compression

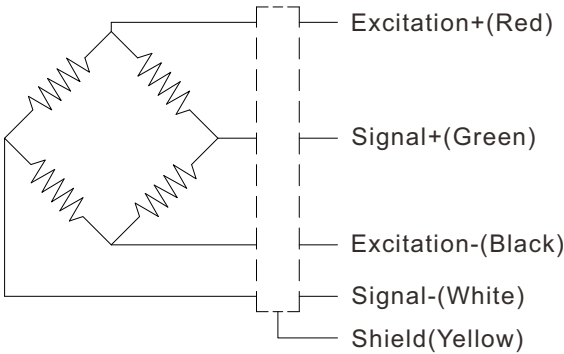

Shield is NOT connected to the sensor body

Sensor/Amplifier/Indicator

| Items                                             | Power supply        | Output/Function                                                                                                 |
|---------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------|
| LCS07                                             | 3-12V<br>(Constant) | -24mV...+24mV<br>(Depending on the power supply)                                                                |
| LCS07<br>+<br>Analog amplifier                    | 12~24V DC           | 0-3.3V,0-5V,0-10V,0-2.5-5V,0-5-10V<br>-3.3-3.3V,-5-5V,-10-10V<br>0-20mA,4-20mA,4-12-20mA...                     |
| LCS07<br>+<br>Digital amplifier                   | 12~24V DC           | RS485 or RS232 output                                                                                           |
| LCS07<br>+<br>Indicator                           | 12~24V DC           | Display force value<br>Switch/Relay output<br>Peak holding<br>RS485/RS232 interface<br>0-5V/0-10V/4-20mA output |
| Email us for datasheet of amplifier and indicator |                     |                                                                                                                 |