


Dimensions in "mm"

189usd/pc

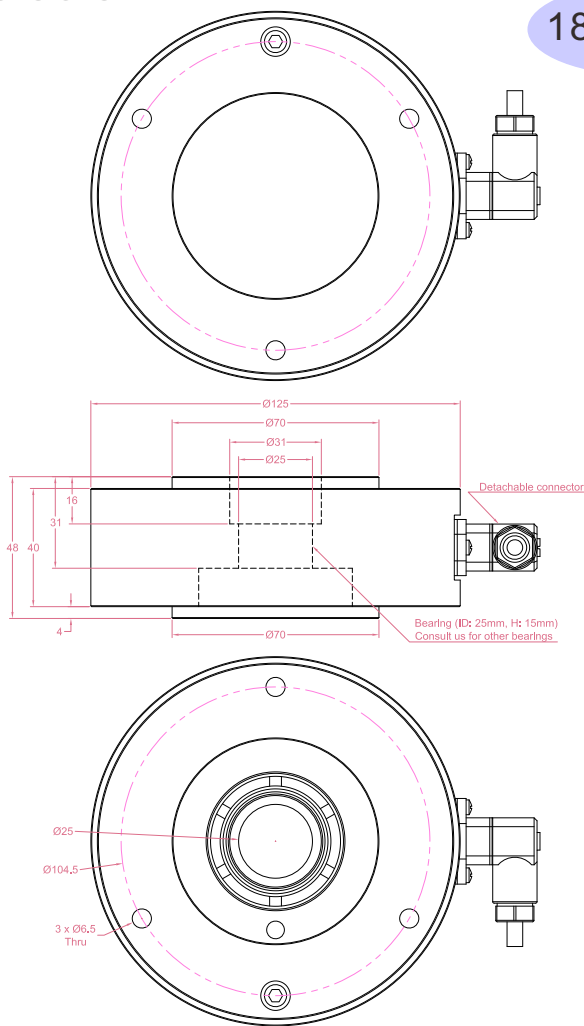

Order example:

2 x STPD - 0.3kN

Quantity

Model

Capacity

Email to sales@loadcellsensor.com for a quote


Specifications			
Rated Capacity	0.15/0.3/0.5/0.75 kN		
Rated Output	1.0 mV/V	Compensated Temp.	0...+40°C
Excitation	3~12V	Operating Temp.	-20...+60°C
Zero Balance	±0.03 mV/V	Temp. Coeff. of Zero	±0.02% F.S./°C
Nonlinearity	±0.2% F.S.	Temp. Coeff. of Span	±0.02% F.S./°C
Hysteresis	±0.2% F.S.	Input Resistance	750±50 Ohms
Nonrepeatability	±0.1% F.S.	Output Resistance	700±10 Ohms
Creep(5min)	±0.05% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP50
Breaking Load	200% F.S.	Element Material	Aluminum alloy
Cable	Ø5.2*2000mm 4-conductor shielded cable		

• LCS reserves the right to modify its design and specifications without notice


P:1/2



Load direction

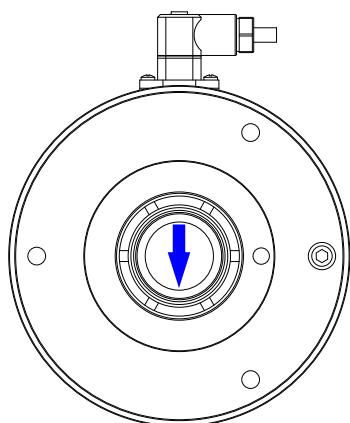

Wiring Code

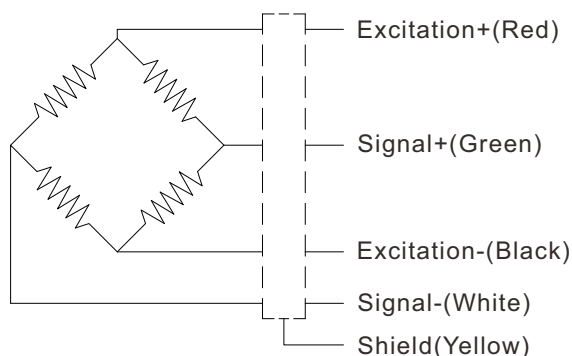

Shield is NOT connected to the sensor body

Sensor/Amplifier/Indicator

Items	Power supply	Output/Function
STPD	3-12V (Constant)	0mV...+12mV (Depending on the power supply)
STPD + Analog amplifier	12~24V DC	0-3.3V, 0-5V, 0-10V, 0-20mA, 4-20mA...
STPD + Digital amplifier	12~24V DC	RS485 or RS232 output
STPD + Indicator	12~24V DC	Display force value Switch/Relay output Peak holding RS485/RS232 interface 0-5V/0-10V/4-20mA output
Email us for datasheet of amplifier and indicator		

Customization options

Cable (Length/Specifications/Connectors)
Dimensions and measuring range
Working Temperature (-40°C...+150°C)

