


Dimensions in “mm”



Capacity	W
0.3/0.5/1 kg	12
2/3/5 kg	15

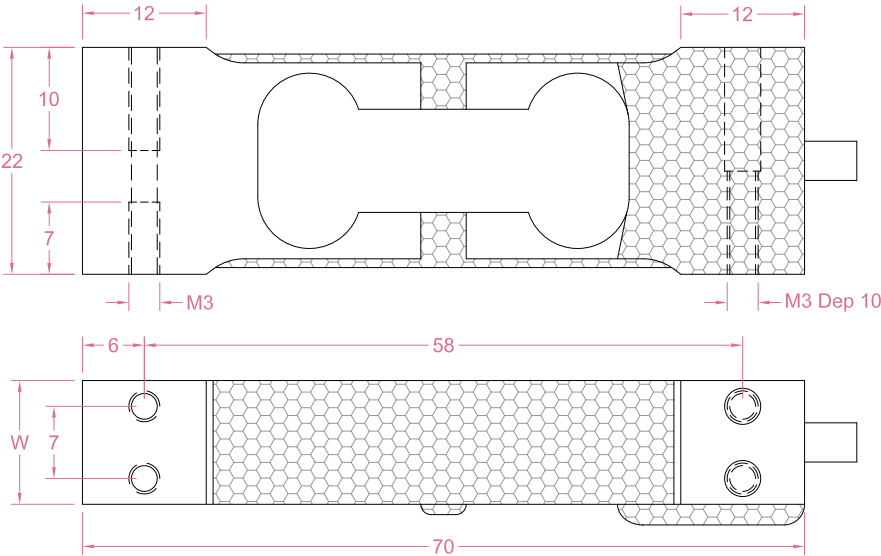

Order example:

5 x LCE17 - 0.3kg

Quantity Model Capacity

Email to sales@loadcellsensor.com for a quote

Quantity	Price
5pcs	39.6usd/pc
100pcs	34.9usd/pc
500pcs	26.5usd/pc

Specifications			
Rated Capacity	0.3/0.5/1/2/3/5 kg		
Rated Output	2.0 mV/V ≤0.5kg: 1.0mV/V	Compensated Temp.	-10...+40°C
Excitation	3~12 V	Operating Temp.	-20...+65°C
Zero Balance	±0.05 mV/V	Temp. Coeff. of Zero	±0.002% F.S./°C
Nonlinearity	±0.02% F.S.	Temp. Coeff. of Span	±0.002% F.S./°C
Hysteresis	±0.02% F.S.	Input Resistance	390±40 Ohms
Nonrepeatability	±0.02% F.S.	Output Resistance	390±40 Ohms
Creep(30min)	±0.02% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP62
Breaking Load	200% F.S.	Element Material	Aluminum alloy
Cable	Ø3.8*300mm 4-conductor shielded cable		

• LCS reserves the right to modify its design and specifications without notice

