胜利门
BROADUP

HIGH SPEED ROLL UP DOOR

C702



ENGINEERED
FOR EXCELLENCE
BUILT TO PERFORM.

High Speed | High Reliability | Enhanced Safety | Built to Last

PRODUCT DETAILS

FEATURES A SLEEK,
STREAMLINED DESIGN.

The C702 high speed door offers reliable, durable performance and is easy to maintain.

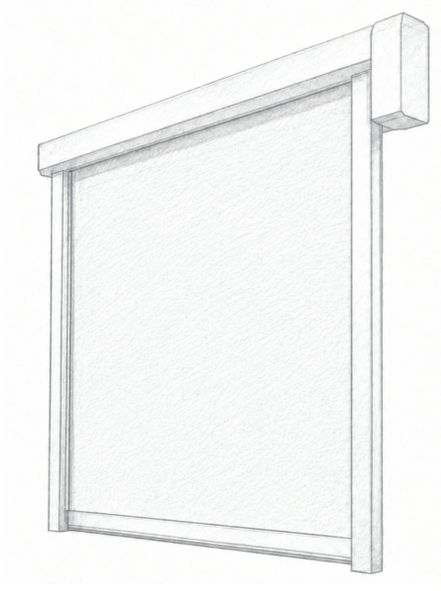

01

Fast operation.

The door opens quickly, effectively reducing waiting time for personnel, forklifts, and equipment. This improves operational efficiency and makes it ideal for industrial environments with frequent access.



02

Constant Curtain Tension.

An integrated curtain tension system keeps the curtain consistently taut during closing, ensuring smooth, reliable operation every time.



03

Low maintenance cost.

Equipped with maintenance-free, wear-resistant counterweights, it maintains excellent weight balance during opening and closing, ensuring smoother and more reliable operation while reducing routine maintenance costs.



04

Customized curtain colors.

In addition to standard colors, a wide range of curtain colors can be customized according to customer requirements, allowing the door to better match different factories, workshops, and brand images.



USAGE SCENARIOS

ENGINEERED FOR EXCELLENCE

BUILT TO PERFORM.

01

Logistics & warehousing.

Suitable for warehouse entrances, exits, loading areas, and other high-frequency access points. With an opening speed of 2 m/s, the door allows pedestrians, forklifts, and logistics equipment to pass through quickly, reducing waiting time and improving cargo turnover efficiency.



02

Food industry

Suitable for food processing, packaging, and hygienic passageways. Designed without traditional wind bars to minimize dust accumulation and facilitate easy cleaning; made from hygienic, corrosion-resistant, and durable materials.



03

Machinery manufacturing

Suitable for workshops, equipment passages, and material transfer openings. Its maintenance-free, wear-resistant bottom counterweight keeps the door balanced during high-speed operation, ensuring stable and durable performance for the frequent opening demands of machinery manufacturing.



SPECIFICATIONS

CHARACTERISTICS

Max.dimensions	W 5000mm x H 5000mm
Opening speed	1.2m/s-2.0m/s
Closing speed	0.5m/s-1.2m/s
Applications	Indoor, diff-pressure zones, labs
Frame structure	Galvanised,Option:Stainless steel
Curtain thickness	1.2mm,Optional:2.0mm
Safety devices	Photocell safety protection, Light curtain(optional)
Voltage/Frequency	Single-phase 220 V ±10%, 50–60 Hz
Advised operating tem	+5°C to +40°C
Motor	Power 0.75kW or 1.5kW IP rating：IP54
Control box	Provided with：Open/Close button, Emergency switch,supply switch
Colour option	RAL5002 RAL7046 RAL1003 RAL2004 Other colors can be customized

ROBUST & DURABLE
Built to last

EXCELLENT SEALING
Minimizes air leakage

SAFE & RELIABLE
Multiple safety protections

SMOOTH OPERATION
High performance and efficiency

EASY MAINTENANCE
Simple structure, easy service

BROADUP

ABOUT US

Founded in 2005, Victory Door is an industrial door manufacturer integrating R&D, production, and sales. With factories in Guangzhou and Hebei, and an R&D team in Beijing, we adhere to Quality First – strict in-house quality control from raw materials to finished products. All doors are CE, SGS, EMC, and IEC certified, and produced in our own facilities. Product range: cold storage doors (-30°C), cleanroom doors (SGS ISO 6/7), high-speed doors, stacking doors, spiral doors, and loading bay systems. Quality is our culture, from our factory to your door.

BEIJING VICTORY DOOR CO., LTD.

Address:
No. 5 Jingwa Street, Agricultural Zhongguancun,
Pinggu District, Beijing, China

GUANGZHOU VICTORY DOOR CO., LTD.

Address:
Room 901-902, Jiatai Building, No. 58 Huancui South Road,
Liwan District, Guangzhou, China

Contact：Ben
+86-17322043190
ben@broadup.com.cn

Contact：Eric
+86-13302291975
victorydoor@broadup.com.cn

Website
www.victorydoor.com