胜利门
BROADUP

HIGH SPEED CLEANROOM DOOR

D668



ENGINEERED
FOR EXCELLENCE
BUILT TO PERFORM.

High Speed
High Reliability
Enhanced Safety
Built to Last

PRODUCT DETAILS

ENGINEERED
FOR CLEANROOMS.
BUILT TO COMPLY.

Every component is precisely designed to ensure superior airtightness, easy cleaning, GMP compliance, and long-lasting durability in cleanroom environments.

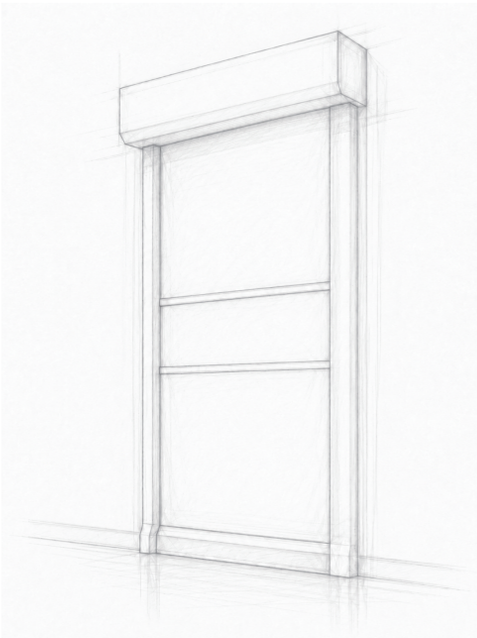

01

Flexible Cushion · Bottom Sea

The door curtain bottom uses a soft, wear resistant flexible pocket – no rigid metal. Closes gently, won't hurt feet. Deforms on impact, protecting door and goods. Also compensates for uneven floors, improving bottom sealing.



02

Auto Reset – Less Maintenance, Stable Airtightness

Door auto resets after accidental derailment – no manual downtime. Quickly restores tight curtain rail fit, stops leakage from gap, ensures airtightness. Ideal for high traffic passages.



03

One-Piece Molding · Easy Water Cleaning

Seamless one-piece construction – Smooth, crevice-free surface leaves no place for dust. Simple wipe-down cleaning meets GMP hygiene standards, keeping the cleanroom sterile at all times.



04

Compact Design, Tight Sealing

Optimized head cover and track are far thinner and narrower than conventional doors – compact structure ideal for low ceiling or equipment dense retrofits. Achieves tight sealing performance with a clean, simple look that blends easily into any cleanroom.



USAGE SCENARIOS

ENGINEERED FOR PERFORMANCE.

BUILT FOR EVERY CLEANROOM NEED.

01

Food-grade separation, Efficient access.

In food processing plants, raw materials move from general areas to high cleanliness packaging zones. D668’s unique track and high level airtightness effectively block dust and bacteria. Fast opening/closing at 1.0 m/s reduces air exchange. Flexible soft bottom pocket protects carts; auto reset handles impacts, ensuring continuous production.



02

Semiconductor passage, Clean access.

Material passage in semiconductor assembly workshops. D668’s compact design fits tight spaces; infrared photocell prevents pinching; soft bottom pocket (no rigid metal) avoids scratching equipment. High level clean environment meets electronics production requirements.



03

Stable pressure differential, clean & compliant.

Partition between GMP pharmaceutical lab and preparation area. D668 auto reset reduces downtime from derailment; unique rail seal maintains pressure differential. Curtain has no rigid parts, won’t damage instruments; easy to clean, compliant with pharma audits.



SPECIFICATIONS

CHARACTERISTICS

Max.dimensions	W 4000mm x H 4000mm
Opening speed	0.5m/s-1.0m/s
Closing speed	0.5m/s
Cleanliness class	Closed to ISO7
Suitable for GMP facilities	Class C and D Laboratory
Structure covers	Galvanised Option:Stainless steel
Safety devices	Infrared barrier And Radio safety edge
Emergency switch	Resettable door curtain optional: UPS
Advised operating tem	+5°C to +40°C
Motor	Power 0.75k W or 1.5kW IP rating：IP54
Control box	Provided with：Open/Close button, Emergency switch,supply switch
Colour option	RAL5002 RAL1003 RAL7046 RAL2004 Other colors can be customized

ROBUST & DURABLE
Built to last

EXCELLENT SEALING
Minimizes air leakage

SAFE & RELIABLE
Multiple safety protections

SMOOTH OPERATION
High performance and efficiency

EASY MAINTENANCE
Simple structure, easy service

BROADUP

ABOUT US

Founded in 2005, Victory Door is an industrial door manufacturer integrating R&D, production, and sales. With factories in Guangzhou and Hebei, and an R&D team in Beijing, we adhere to Quality First – strict in-house quality control from raw materials to finished products. All doors are CE, SGS, EMC, and IEC certified, and produced in our own facilities. Product range: cold storage doors (-30°C), cleanroom doors (SGS ISO 6/7), high-speed doors, stacking doors, spiral doors, and loading bay systems. Quality is our culture, from our factory to your door.

BEIJING VICTORY DOOR CO., LTD.

Address:
No. 5 Jingwa Street, Agricultural Zhongguancun,
Pinggu District, Beijing, China

GUANGZHOU VICTORY DOOR CO., LTD.

Address:
Room 901-902, Jiatai Building, No. 58 Huancui South Road,
Liwan District, Guangzhou, China

Contact：Ben
+86-17322043190
ben@broadup.com.cn

Contact：Eric
+86-13302291975
victorydoor@broadup.com.cn

Website
www.victorydoor.com