胜利门
BROADUP

HIGH SPEED ROLLING DOOR

V115



ENGINEERED
FOR EXCELLENCE
BUILT TO PERFORM.

High Speed
High Reliability
Enhanced Safety
Built to Last

PRODUCT DETAILS

AFFORDABLE PRICE

IDEAL FOR BUDGET-CONSCIOUS PROJECTS

TV115 is a classic high-speed door with a simple structure, affordable price, and proven reliability

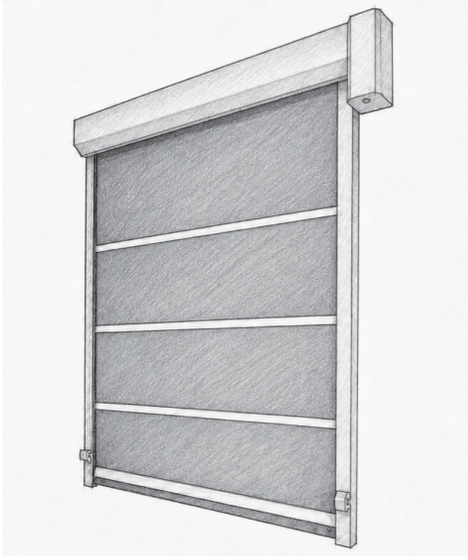

01

Detachable curtain, Cost-Effective Maintenance.

The modular door curtain allows individual sections to be removed and replaced, eliminating the need to replace the entire curtain. This makes maintenance easier and helps reduce upkeep costs.



02

Robust & Reliable.

Constructed from galvanized steel panels, the door features sturdy side frames and guide rails that provide reliable support for the curtain, ensuring smooth and stable operation over the long term.



03

Durable Curtain, High Color Fastness.

Customized curtain colors, durable material, and excellent color retention for long-lasting aesthetics and stable performance.



04

Safety & Emergency Access.

Equipped with safety photocells as standard to ensure safe passage for personnel and vehicles. In emergencies, the wind bar can be manually lifted to allow quick evacuation or emergency access.



USAGE SCENARIOS

ENGINEERED FOR EXCELLENCE

BUILT TO PERFORM.

01

Environmental industry

Suitable for waste treatment plants, transfer stations, and sorting workshops, it quickly contains odors, dust, and flying insects, keeping the environment clean and controlled while supporting frequent vehicle traffic.



02

Internal factory areas

Suitable for internal factory zoning, it quickly separates different production areas, reduces cross-contamination, helps keep out dust and insects, and maintains a clean, well-organized workshop environment.



03

Warehouse and logistics passageways

Designed for warehouse entrances, logistics corridors, and sorting/loading areas, it supports high-frequency traffic of forklifts, pallet trucks, and personnel. Fast opening and closing help block dust, reduce noise, and improve overall logistics efficiency.



SPECIFICATIONS

CHARACTERISTICS

Max.dimensions	W 5500mm x H 7500mm
Opening speed	1.0m/s-1.5m/s
Closing speed	0.5m/s-0.8m/s
Frame structure	Galvanised,Option:Stainless steel
Curtain thickness	0.8mm
Curtain material	High-strength industrial base fabric
Safety devices	Photocell safety protection, Light curtain(optional)
Voltage/Frequency	Single-phase 220 V ±10%, 50–60 Hz
Advised operating tem	+5°C to +40°C
Motor	Power 0.75kW IP rating：IP54
Control box	Provided with：Open/Close button, Emergency switch,supply switch
Colour option	RAL5002 RAL1003 RAL7046 RAL2004 Other colors can be customized

ROBUST & DURABLE
Built to last

EXCELLENT SEALING
Minimizes air leakage

SAFE & RELIABLE
Multiple safety protections

SMOOTH OPERATION
High performance and efficiency

EASY MAINTENANCE
Simple structure, easy service

BROADUP

ABOUT US

Founded in 2005, Victory Door is an industrial door manufacturer integrating R&D, production, and sales. With factories in Guangzhou and Hebei, and an R&D team in Beijing, we adhere to Quality First – strict in-house quality control from raw materials to finished products. All doors are CE, SGS, EMC, and IEC certified, and produced in our own facilities. Product range: cold storage doors (-30°C), cleanroom doors (SGS ISO 6/7), high-speed doors, stacking doors, spiral doors, and loading bay systems. Quality is our culture, from our factory to your door.

BEIJING VICTORY DOOR CO., LTD.

Address:
No. 5 Jingwa Street, Agricultural Zhongguancun,
Pinggu District, Beijing, China

GUANGZHOU VICTORY DOOR CO., LTD.

Address:
Room 901-902, Jiatai Building, No. 58 Huancui South Road,
Liwan District, Guangzhou, China

Contact：Ben
+86-17322043190
ben@broadup.com.cn

Contact：Eric
+86-13302291975
victorydoor@broadup.com.cn

Website
www.victorydoor.com