




MAGNETIC USB GUARD TOUR SOLUTION 
PROFESSIONAL MANUFACTURER SINCE 2006

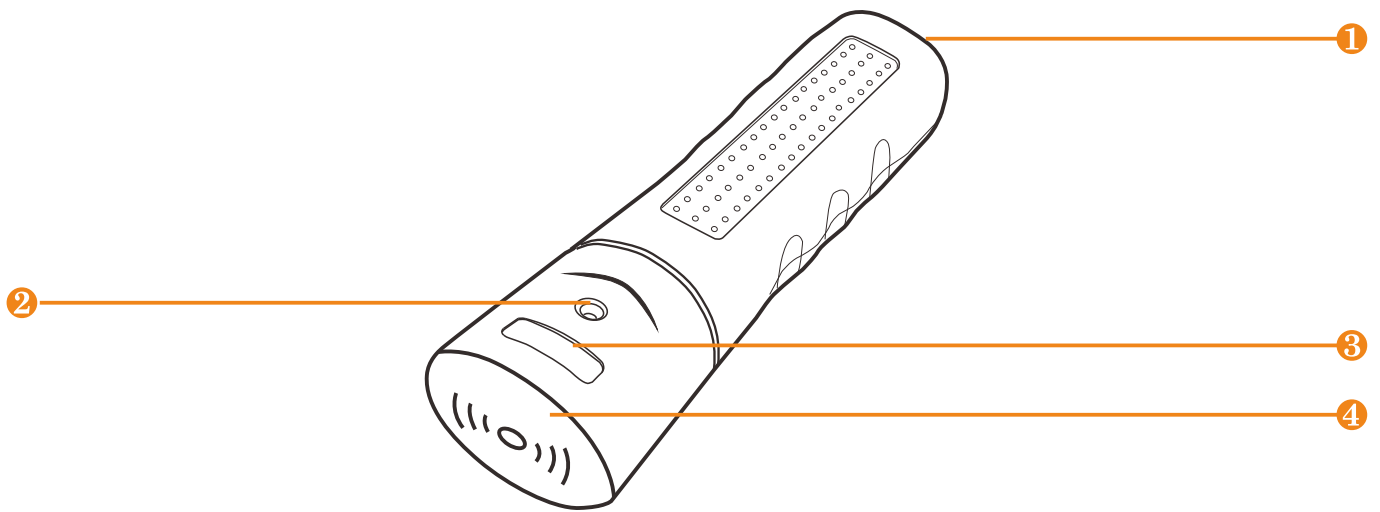

- ① USB port
- ④ Sensor area

② LED indicator

③ Label Area

Benefits



RFID Reading

Auto-induction technology, non-touch scanning. Read 125kHz RFID tags



Magnetic USB Connector

Impact record on reader saves every beating time, can easily find out who broke the reader.



Durable Structure

Super metal liner, flexible rubber shell, super impact resistant, shake-proof, high/low temperature resistant.




Impact Record

Impact record on reader saves every beating time, can easily find out who broke the reader.


Technical Parameters

Frequency	125kHz EM ID tag
Read method	Auto-induction without pressing button
Storage capacity	80,000 logs
Impact record	32,000 logs
Communication	Magnetic USB communication
Operation prompt	LED+Vibration
IP Rate	IP 67
Working temperature	-20°C to 70°C
Working humidity	0 to 95%
Battery	3.7v built-in rechargeable li-ion battery
Battery life	Continuous reading 20,000 logs
Dimension	142mm x 32mm x 44mm
Net weight	150g
Standardized accessories	Leather case,USB cable, adapter


Working Map

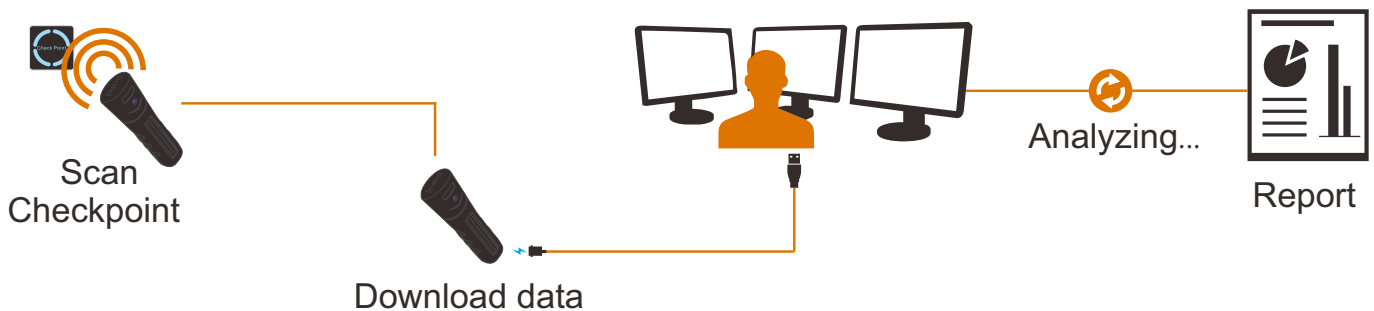


Content



Holster




USB cable



Adapter



Software



Manual