

ETMY ET-368

Professional Waterproof Walkie-talkie



Main Functions

- Channel Monitor
- High/ Low power
- Busy Channel Lockout(BCL)
- Voice control (VOX)
- Squelch level
- Time-out Timer(TOT)
- CTCSS/DCS
- Wide/Narrow band
- Battery save
- Low Power Alert
- ANI Code
- Programming password

General Parameter

Frequency Range	VHF:136~174MHz / UHF: 400~480MHz
Channel Number	32
Channel Spacing	12.5 / 25KHz
Operating Temperature Range	-30°C~ +60°C
Operating Voltage	DC 7.4V ±20%
Frequency Stability	±2.5ppm
Antenna Impedance	50Ω
Dimension	114 × 60 × 39mm (Not include antenna)
Weight	Approx 300g (Include battery, antenna)
Battery Capacity	3800mAh battery
Protection Grade	IP68


Transmission Part

Output Power	5W±0.5W
Modulation Type	F3E
Audio Distortion	≤5% (300-3000Hz)
Max Freq Deviation	≤ ±5 KHZ
Pre-emphasis Characteristic	6dB
FM Noise	≤ -45dB
Spurious Radiation	< -6dB
Signal Noise Ratio	40dB

Reception Part

Receive Sensitivity	0.22μV / 0.25μV
Audio Output power	1W
Audio Distortion	≤5%
FM Noise	45dB / 40dB
Noise Respond	≥60dB
Adjacent Channel selectivity	≥70dB
Intermodulation	≥60dB
Blocking	≥84dB

Standard Accessories

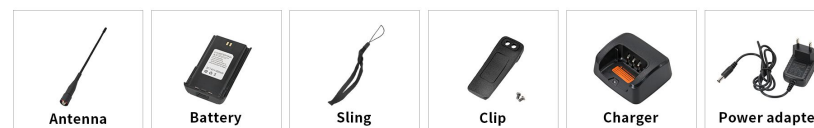

Scan for more of our products