



Single Fiber Collimator (GK-C Series)

● Description

The Fiber Collimator is the basic element for in-line fiber optics components, such as isolator and FWDM. It has low insertion loss and high return loss. The unique processing and high quality AR coating also enable this collimator to handle high power.


● Specifications

Parameter	Unit	Type A
Center Wavelength (λ_c)	nm	1310, 1480, 1550 or specified
Operating Wavelength Range	nm	$\lambda_c \pm 30$
Working Distance	mm	5 - 50 51 - 100 101 - 250 251 - 500
Typ. Insertion Loss	dB	0.25 0.25 0.3 0.5
Max. Insertion Loss	dB	0.30 0.35 0.4 0.6
Beam Diameter ($1/e^2$)	mm	0.45 ± 0.05 0.75 ± 0.05 0.95 ± 0.05
Min. Return Loss	dB	55
Max. Optical Power	W	0.3, 0.5, ..., 3
Max. Tensile Load	N	5
Fiber Type	-	SMF-28 Fiber
Operating Temperature	℃	-5 to +70
Storage Temperature	℃	-40 to +85

¹IL is 0.3 dB higher and RL is 5 dB lower for each connector added.

²Optical power will be only 1 W with connector added.

● Package Dimensions

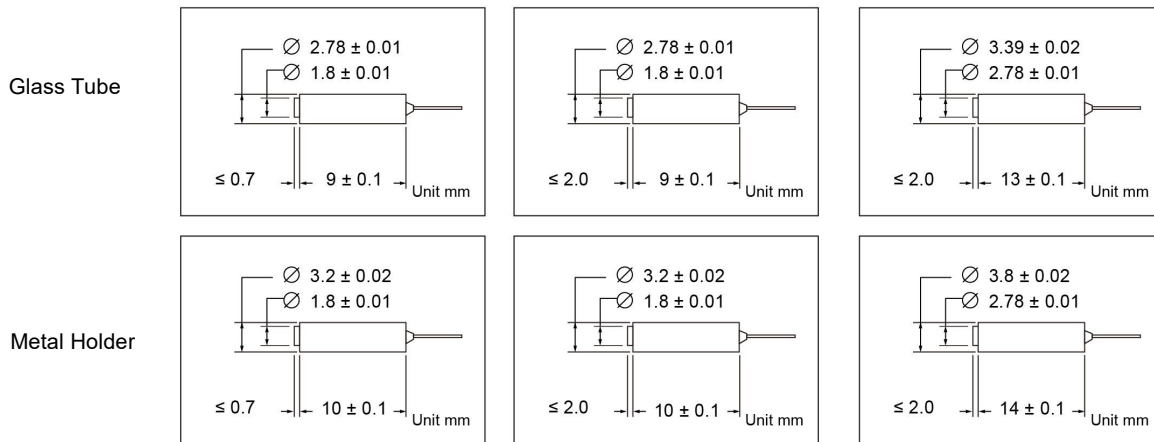

WD: 0-100 mm , Lens OD: 1.8 mm WD: 101-250 mm , Lens OD: 1.8 mm WD: 251-500 mm , Lens OD: 2.78 mm

● Ordering Information

GK-C-①-②-③-④-⑤-⑥-⑦-⑧-⑨-⑩

①: Lens Diameter

1 - 1.8 mm

2 - 1.0 mm

②: Pigtail Type

1 - Single Fiber Pigtail

③: Wavelength

31 - 1310 nm

48 - 1480 nm

55 - 1550 nm

④: Holder Type

1 - Metal Holder

2 - Glass Tube

⑤: Working Distance

5 - 5 mm

S-Specify

⑥: Connector Type

1 - FC/UPC 4 - SC/APC

2 - FC/APC N - None

3 - SC/UPC S - Specify

⑦: Fiber Jacket

B - 250 μ m Bare Fiber

L - 900 μ m Loose Tube

⑧: Fiber Length

1 - 1.0 m

S - Specify

⑨: Optical Power

03 - 0.3W

05 - 0.5W

3 - 3W

S-Specify

⑩: Lens Type

C - C Lens