

LED Street Light

Crush JD-1052



LED/Philips Lumileds 5050 or 3030
Driver:philips/Meanwell/Inventronics

- Aluminum die casting material,surface anti-ageing electrostatic Spray processing,super resistance with corrosion.
- PMMA Lens cover.
- Input Voltage: AC100-277V, 50/60Hz, IP66, Ik08
- Windy area :115 cm²
- Stainless steel screws
- 5 years warranty



CE CB

金典照明
GOLDEN CLASSIC

技术参数 Specification

产品型号	Product Code	JD-1052A	JD-1052B	JD-1052C
LED数量	LED Quantity	40pcs 3030	40pcs 3030	40pcs 3030
额定功率	Rate Power	20W	30W	40W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
初具光效	Luminous FLUX	140lm/W	130lm/W	120lm/W
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	RA75	RA75
工作环境温度	Temperature of working condition	-40°C~50°C	-40°C~50°C	-40°C~50°C
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	100000H (L70B50)	100000H (L70B50)	100000H (L70B50)
防护等级	Protection Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ 48mm	Φ 48mm	Φ 48mm
安装高度	Installation Height	4-6m	4-6m	4-6m
净重	Net Weight	1.3kg	1.3kg	1.3kg
毛重	Gross Weight	2kg	2kg	2kg
产品尺寸	Product Size	397x110x61mm	397x110x61mm	397x110x61mm
包装尺寸	Packing Size	420x125x80mm	420x125x80mm	420x125x80mm


注:包装尺寸为外尺寸

本表所示技术参数均在环境温度为25°C,湿度35%的实验室环境中测得。

Packing size is outer size of box

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

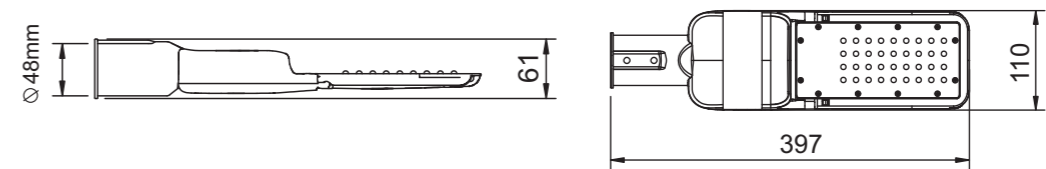

配光曲线图 Light Distribution Curve

