

LED Street Light

Pure
JD-1047



Philips Lumileds 5050 or 3030 Led
+Inventronics driver

- Used in high strength aluminum die casting material,surface anti-aging electrostatic spray processing,super resistance to corrosion.
- Hight trans parent Tempered glass
- Input Voltage:Ac100-277V,50/60HZ,IP66,IK09
Horizontal installation :+10~-10° adjustable
- Vertical installation:+10~-10° adjustable
- Different types lens for choice
- Windy area :small size : 345cm²
medium size : 503cm²
big size :748cm²
- Spare parts for choice
10 kv/20kv SPD
0-10v dimming driver
auto switch
Nema socket
- 5 years warranty



CE CB





技术参数 Specification

产品型号	Product Code	JD-1047A	JD-1047B	JD-1047C	JD-1047D	JD-1047E	JD-1047F	JD-1047G	JD-1047H	JD-1047I
LED数量	LED Quantity	16/24pcs 5050	24/36pcs 5050	36/54pcs 5050	40/60pcs 5050	48/72pcs 5050	64/96pcs 5050	80/120pcs 5050	88/132pcs 5050	100/150pcs 5050
额定功率	Rate Power	30W	40W	60W/70W/80W/100W	60W	70W	100W/120W/150W	120W	150W	200W/240W
色温	Color Temperature	6500/4000/3000K			6500/4000/3000K			6500/4000/3000K		
灯具光效	Luminous Flux	145-165LM/W	145-165LM/W	130-155LM/W	145-165LM/W	145-165LM/W	140-165LM/W	145-165LM/W	145-165LM/W	140-160LM/W 140-155LM/W
输入电压	Input Voltage	AC100-277V			AC100-277V			AC100-277V		
频率	Frequency Range	50/60Hz			50/60Hz			50/60Hz		
显色指数	CRI	Ra70/Ra80			Ra70/Ra80			Ra70/Ra80		
工作环境温度	Temperature of working condition	-40℃~50℃			-40℃~50℃			-40℃~50℃		
工作环境湿度	Humidity of working condition	20%-90%			20%-90%			20%-90%		
LED寿命	LED life time	100000H (L70B50)			100000H (L70B50)			100000H (L70B50)		
防护等级	Protection Grade	IP66			IP66			IP66		
安装管径	Installation Pipe Dia	Φ60mm/Φ42mm	Φ60mm/Φ42mm	Φ60mm/Φ42mm	Φ60mm/Φ42mm	Φ60mm/Φ42mm	Φ60mm/Φ42mm	Φ76mm	Φ76mm	Φ76mm
安装高度	Installation Height	3-4m	4-5m	5-6m	5-6m	7-8m	8-9m	9-10m	10-11m	11-12m
净重	Net Weight	6.4kg	6.5kg	6.8kg	10kg	10.5kg	11kg	11.4kg	11.8kg	12kg
毛重	Gross Weight	7.4kg	7.5kg	7.8kg	11kg	11.5kg	12kg	12.4kg	12.8kg	13kg
产品尺寸	Product Size	573x245x120mm	573x245x120mm	573x245x120mm	717x320x130mm	717x320x130mm	717x320x130mm	867x392x159mm	867x392x159mm	867x392x159mm
包装尺寸	Packing Size	635x285x170mm	635x285x170mm	635x285x170mm	770x365x165mm	770x365x165mm	770x365x165mm	920x440x200mm	920x440x200mm	920x440x200mm

注:包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

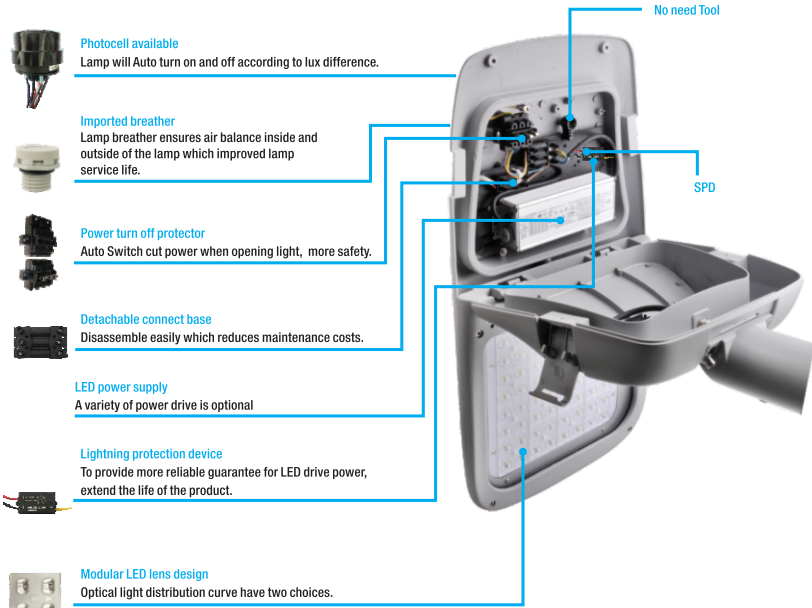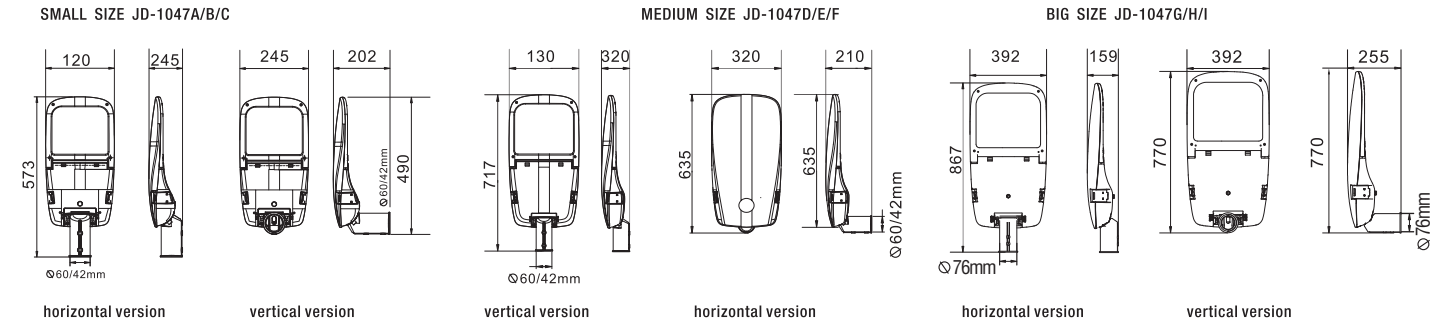

Detachable light fixture, Vertical and horizontal installation both are ok.

