

# LED Street Light



## Berry

JD-1043B



Korea led Modules



JD-1043A

- Modern fashion design of appearance, made the light become an artwork, integrated with the environment perfectly, to make it as top project.
- Used in high strength aluminum die casting material, surface anti-aging electrostatic spray processing, super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
- Input Voltage: AC110-277V, 50/60Hz, IP66, Ik09
- Horizontal version angle adjustable : +15° ~ -15°
- Vertical version angle adjustable : +15° ~ -15°
- Different type lens for choice
- Windy area : 570 cm<sup>2</sup>
- Spare parts for choice
  - 10 kv/20kv SPD
  - 0-10v dimming driver
  - auto switch
  - Nema socket
- 5 years warranty

CE CB

**金典照明**  
GOLDEN CLASSIC

### 技术参数 Specification

产品型号	Product Code	JD-1043A-30W	JD-1043A-60W	JD-1043A-100W
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	140-150lm/w	140-150lm/w	140-150lm/w
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C -50°C	-40°C -50°C	-40°C -50°C
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protection Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ60mm	Φ60mm	Φ60mm
安装高度	Installation Height	4-6m	6-8m	8-0m
净重	Net Weight	7.35kgs	7.82kgs	8.2kgs
毛重	Gross Weight	8.53kgs	9.02kgs	9.4kgs
产品尺寸	Product Size	743x516x122mm	743x516x122mm	743x516x122mm
包装尺寸	Packing Size	655x590x165mm	655x590x165mm	655x590x165mm

注:包装尺寸为外尺寸


本表所示技术参数均在环境温度为25°C,湿度35%的实验室环境中测得。

Packing size is outer size of box


All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

### 产品尺寸 Product Dimension



#### Horizontal Version

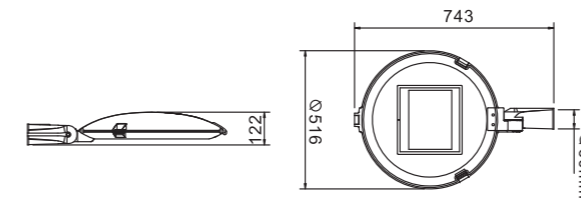

#### Vertical Version

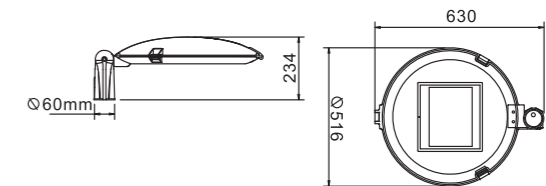

### 配光曲线图 Light Distribution Curve

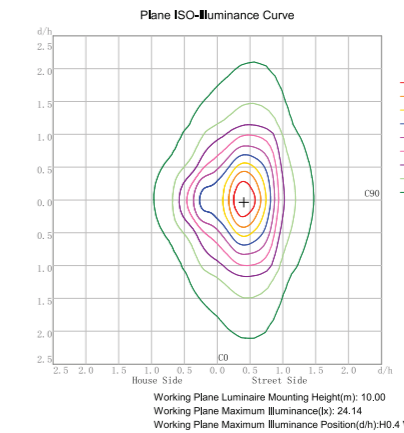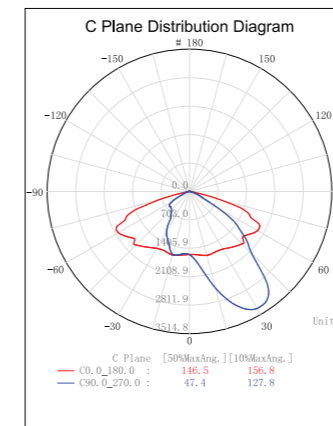

AC100-240V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~45°C 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	--	---	-----------------------------	----------------------------------