



Pluto

JD-1044A



Led Garden Light Inventronics driver

- Used in high strength aluminum die casting material,surface anti-aging electrostatic spray processing,super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
Input Voltage: AC100-240V, 50/60Hz, IP66, Ik09
- Different type lens for choice
- Windy area : 815 cm²
- Spare parts for choice
10 kv/20kv SPD
0-10v dimming driver
auto switch
- 5 years warranty

JD-1044B

Korea led modules

CE CB

技术参数 Specification

产品型号	Product Code	JD-1044A-30W	JD-1044A-60W	JD-1044A-100W
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	150lm/w(5050) 140lm/w(3030)	150lm/w(5050) 140lm/w(3030)	150lm/w(5050) 140lm/w(3030)
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40 °C-50 °C
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protection Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ76mm/Φ60mm	Φ76mm/Φ60mm	Φ76mm/ Φ60mm
安装高度	Installation Height	4-6m	6-8m	8-10m
净重	Net Weight	7.9kg	8.46kg	8.9kg
毛重	Gross Weight	9.1kg	9.66kg	10kg
产品尺寸	Product Size	550x516x500mm	550x516x500mm	550x516x500mm
包装尺寸	Packing Size	655x590x165mm	655x590x165mm	655x590x165mm

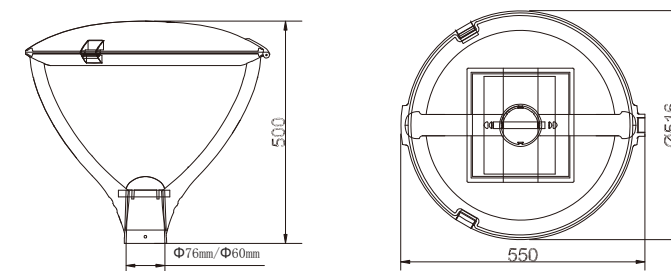
注:包装尺寸为外尺寸

本表所示技术参数均在环境温度为25°C,湿度35%的实验室环境中测得。


Packing size is outer size of box




All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension



配光曲线图 Light Distribution Curve

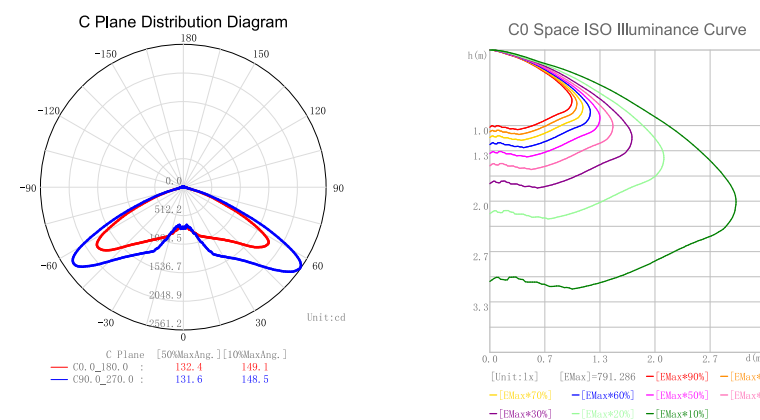

 AC100-240V 输入电压 Input Voltage	 Hz 50/60 频率范围 Frequency Range	 PF >0.92 功率因数 Power Factor	 <15% 总谐波失真 THD	 CRI 75 显色指数 Color Rendering Index	 -40~45°C 工作环境温度 Temperature of Working Condition	 20~90% 工作环境湿度 Humidity of Working Condition	 70000h 使用寿命 Life Time	 IP66 防护等级 Protection Grade
---	--	---	--	--	--	---	---	--