



Jove  
JD-SLG023

CE CB




技术参数 Specification

| 产品型号      | Product Code                        | JD-SLG023A                                 | JD-SLG023B                         | JD-SLG023C                         |
|-----------|-------------------------------------|--------------------------------------------|------------------------------------|------------------------------------|
| LED数量     | LED Quantity                        | 120PCS 3030                                | 120PCS 3030                        | 120PCS 3030                        |
| 额定功率      | Rate Power                          | 10W                                        | 15W                                | 20W                                |
| 色温        | Color Temperature                   | 6500/4000/3000K                            | 6500/4000/3000K                    | 6500/4000/3000K                    |
| 颜色        | Color                               | Black                                      | Black                              | Black                              |
| 充电时间      | Charge time                         | 4-5hours                                   | 5-6hours                           | 6-7hours                           |
| 放电时间      | Discharge time                      | 8hours(full power)                         | 8hours(full power)                 | 8hours(full power)                 |
| 放电时间      | Operating time                      | Intelligent dimming model 4-6 days         | Intelligent dimming model 4-6 days | Intelligent dimming model 4-6 days |
| 灯具光效      | Luminous Flux                       | 1800lm/6500K                               | 2600lm/6500K                       | 3600lm/6500K                       |
| 显色指数      | Color Temperature                   | Ra75                                       | Ra75                               | Ra75                               |
| 电池容量      | Battery capacity                    | 8AH / 12.8V                                | 12AH / 12.8V                       | 16AH / 12.8V                       |
| 电池类型      | Battery type                        | IFR ithium iron phosphate                  | IFR ithium iron phosphate          | IFR ithium iron phosphate          |
| 太阳能单晶硅电池板 | Solar monocrystalline silicon panel | 39W                                        | 39W                                | 39W                                |
| 安装管径      | Installation Pipe Dia               | Φ60mm/Φ76mm                                | Φ60mm/Φ76mm                        | Φ60mm/Φ76mm                        |
| 安装高度      | Installation Height                 | 3-5m                                       | 3-5m                               | 3-5m                               |
| 工作环境温度    | Temperature of working condition    | -10℃~60℃                                   | -10℃~60℃                           | -10℃~60℃                           |
| 工作环境湿度    | Humidity of working condition       | 20%-90%                                    | 20%-90%                            | 20%-90%                            |
| LED 寿命    | LED life time                       | 100000h (L70B50)                           | 100000h (L70B50)                   | 100000h (L70B50)                   |
| 防护等级      | Protection Grade                    | IP66                                       | IP66                               | IP66                               |
| 净重        | Net Weight                          | 11.55kg                                    | 11.95kg                            | 12.35kg                            |
| 毛重        | Gross Weight                        | 13.05kg                                    | 13.45kg                            | 13.85kg                            |
| 产品尺寸      | Product Size                        | 600x600x589mm                              | 600x600x589mm                      | 600x600x589mm                      |
| 包装尺寸      | Packing Size                        | (JD-SL023:755x635x120mm),bracket assembled |                                    |                                    |

注:包装尺寸为外尺寸  
本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box  
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

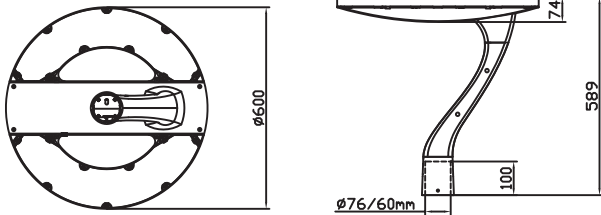

一体化设计, 安装简便,  
各组件可更换, 节省成本。  
Integrated design, easily installed, Internal components  
replacement easy and convenient, reduce the cost.



智能控制器匹配红外线或微波  
波感器, 保证有效照明。  
Intelligent controller can fit PIR sensor or Microwave sensor,  
ensure the effective lighting





防护等级达IP66  
Protection grade  
reaches IP66



抗17级风力  
Anti-Level-17  
hurricane

配光曲线图 Light Distribution Curve

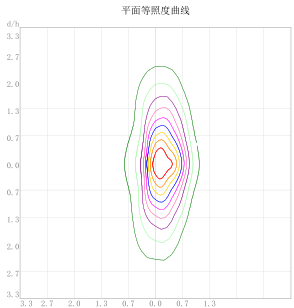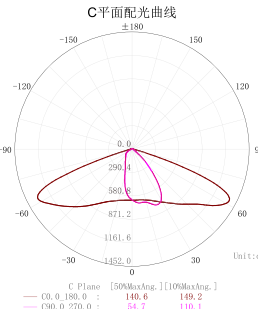

Curves:  
unit:lx  
[EMax]  
[EMax\*90%]>65.644  
[EMax\*90%]>58.351  
[EMin\*90%]>5.027  
[EMax\*60%]>43.763  
[EMax\*50%]>36.489  
[EMax\*40%]>29.175  
[EMax\*30%]>21.881  
[EMax\*10%]>7.204

Solar Garden light