



Opal

JD-F017-L



Led Flood Light
Cree Led/Philips Lumiled 3030 Led
Meanwell driver,with lens

- Modern fashion design of appearance, made the light become an artwork, Integrated with the environment perfectly, to make it as top project.
- Main material used in high strength aluminum die casting material, surface anti-aging electrostatic spray processing, super resistance to corrosion.
- Tempered glass cover, high strength impact resistance.
- Input Voltage: AC100-277V, 50/60Hz, IP66, 1k09
- Steel bracket

JD-F017-L



CE CB

金典照明
GOLDEN CLASSIC

技术参数 Specification

产品型号	Product Code	JD-F017A	JD-F017B	JD-F017C	JD-F017D	JD-F017E	JD-F017F	JD-F017C-L	JD-F017D-L	JD-F017E-L	JD-F017F-L
LED数量	LED Quantity	20PCS 2835	40PCS 2835	60pcs 2835	60pcs 3030	200pcs 2835	300pcs 2835	48pcs 3030	96pcs 3030	180pcs 3030	180pcs 3030
额定功率	Rate Power	10W	20W	30W	50W	100W	150W	30W	50W	100W	150W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	100LM/W	140LM/W	130LM/W	140LM/W	130LM/W
功率因素	PF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
重量	Net Weight	0.88kg	0.9kg	3.1kg	2.1kg	7.1kg	7.6kg	3.1kg	2.1kg	7.1kg	7.6kg
毛重	Gross Weight	1.0kg	1.0kg	3.3kg	2.3kg	7.5kg	8.0kg	3.3kg	2.3kg	7.5kg	8.0kg
产品尺寸	Product Size	199x164x38mm	199x164x38mm	335x320x52mm	268x264x52mm	460x417x61mm	460x417x61mm	335x320x52mm	268x264x52mm	460x417x61mm	460x417x61mm
包装尺寸	Packing Size	650x370x240mm/20PCS	650x370x240mm/20PCS	690x420x370mm/10PCS	580x490x300mm/10PCS	450x450x500mm/5PCS	450x450x500mm/5PCS	690x420x370mm/10PCS	580x490x300mm/10PCS	450x450x500mm/5PCS	450x450x500mm/5PCS

注:包装尺寸为外尺寸


本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box


All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension


JD-F017AB




JD-F017CD




JD-F017EF



配光曲线图 Light Distribution Curve

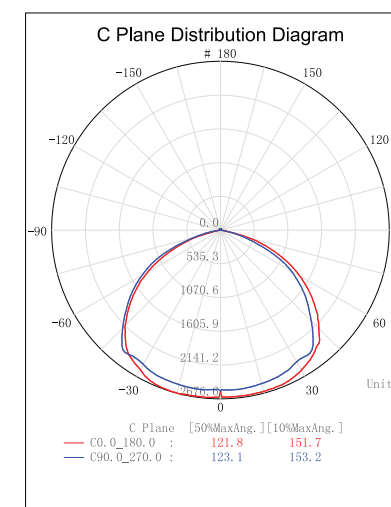

50W

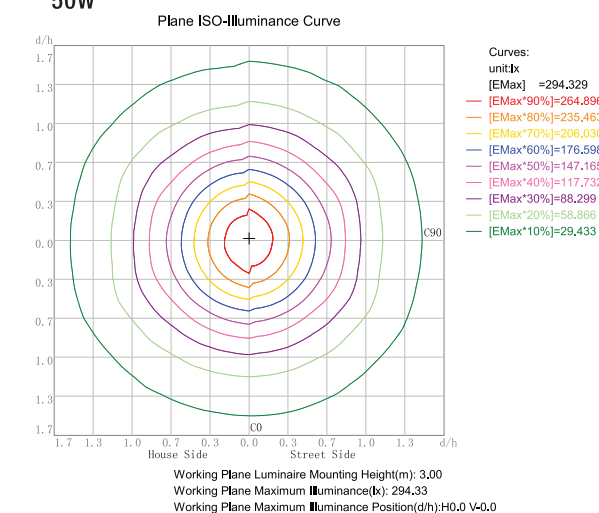

AC100-277V
输入电压
Input Voltage

Hz
50/60
频率范围
Frequency Range

PF
>0.92
功率因数
Power Factor

<15%
总谐波失真
THD

CRI
75
显色指数
Color Rendering Index

-40~45℃
工作环境温度
Temperature of Working Condition

20~90%
工作环境湿度
Humidity of Working Condition

100000H
(L70B50)
使用寿命
Life Time

IP66
防护等级
Protection Grade