

Led Highbay

JD-HB192



3030 or 2835 Leds

DOB/Linear

- Modern fashion design of appearance,made the light become an artwork, Integrated with the Environment perfectly,to made it as top project.
- Many pure aluminum fins are oxidized to achieve good heat dissipation, lens angle: 60°,90°,120°.
-

CE CB



技术参数 Specification

产品型号	Product Code	JD-HB192-A	JD-HB192-B	JD-HB189-200W
LED数量	LED Quantity	144pcs 3030	216PCS 3030	288PCS 3030
额定功率	Rate Power	100W	150W	200W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	100LM/W	100LM/W	100LM/W
功率因素	PF	0.92	0.92	0.92
输入电压	Input Voltage	AC85-265V	AC85-265V	AC85-265V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra80	Ra80	Ra80
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40°C-50°C
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	50000h	50000h	50000h
防护等级	Protection Grade	IP65	IP65	IP65
净重	Net Weight	0.8kg	1.35kg	1.65kg
毛重	Gross Weight	1.6kg	2.4kg	2.7kg
产品尺寸	Product Size	Φ265x32mm	Φ305x32mm	Φ335x32mm
包装尺寸	Packing Size	300x300x70mm	340x340x70mm	340x340x70mm

注:包装尺寸为外尺寸

本表所示技术参数均在环境温度为25°C,湿度35%的实验室环境中测得。


Packing size is outer size of box

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension



配光曲线图 Light Distribution Curve

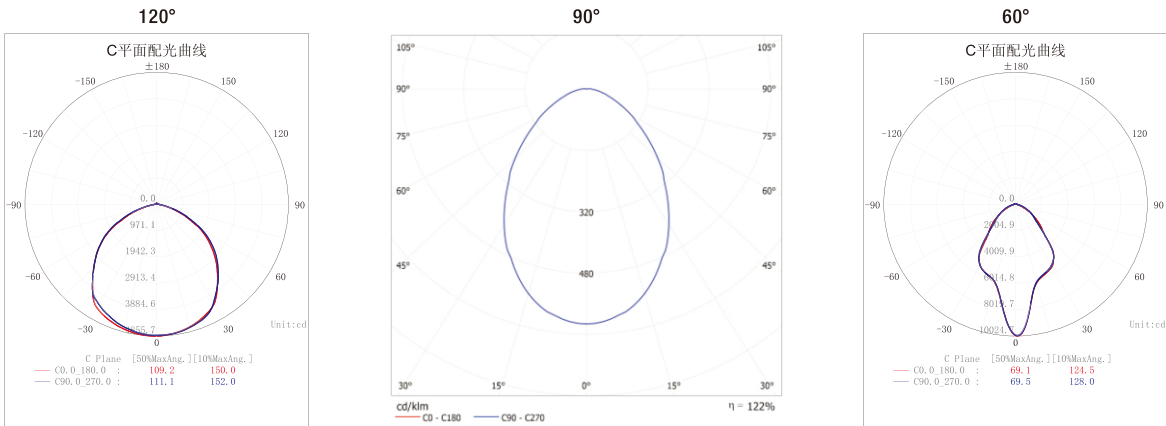

AC85-265V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 80 显色指数 Color Rendering Index	-40~50°C 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	IP66 防护等级 Protection Grade
------------------------------------	--	-------------------------------------	----------------------	--	--	---	----------------------------------