

LED Garden Light



Elf
JD-1054



JD-1055
COB Led,Shines upward

Philips Lumileds 5050 or 3030 Led
Philips/Meanwell/Inventronics driver

- Used in high strength aluminum die casting material,surface anti-aging electrostatic Spray processing,super resistance to corrosion.
- High transparent tempered glass cover,high strength impact resistance.
- Input Voltage:AC100-277V,50/60Hz,IP66,IK08
- Different type lens for choice.

CE CB




技术参数 Specification

产品型号	Product Code	JD-1054A	JD-1054B	JD-1054C	JD-1055A
LED数量	LED Quantity	24PCS 5050/72PCS 3030	48PCS 5050/144PCS 3030	64PCS 5050/192PCS 3030	CXA2520
额定功率	Rate Power	30W	60W	100W	25W
色温	Color Temperature	6500/4000/3000k	6500/4000/3000k	6500/4000/3000k	6500/4000/3000k
灯具光效	Luminous Flux	140lm/(5050) 130lm/(3030)	140lm/w(5050) 130lm/w(3030)	140lm/w(5050)/130lm/w(3030)	60lm/w
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40℃~50℃	-40℃~50℃	-40℃~50℃	-40℃~50℃
工作环境湿度	Humidity of working condition	20-90%	20-90%	20-90%	20-90%
LED 寿命	LED life time	100000H (L70B50)	100000H (L70B50)	100000H (L70B50)	100000H (L70B50)
防护等级	Protection Grade	IP66	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ60mm/Φ70mm	Φ60mm/Φ70mm	Φ60mm/Φ76mm	Φ60mm/Φ76mm
安装高度	Installation Height	3-5m	5-8m	7-9m	3-5m
净重	Net Weight	7.9kg	8.46kg	9.2kg	7.9kg
毛重	Gross Weight	9.1kg	9.66kg	10.7kg	9.1kg
产品尺寸	Product Size	580x450x720mm	580x450x720mm	580x450x720mm	580x450x720mm
包装尺寸	Packing Size	555x505x270mm	555x505x270mm	555x505x270mm	555x505x270mm


注:包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

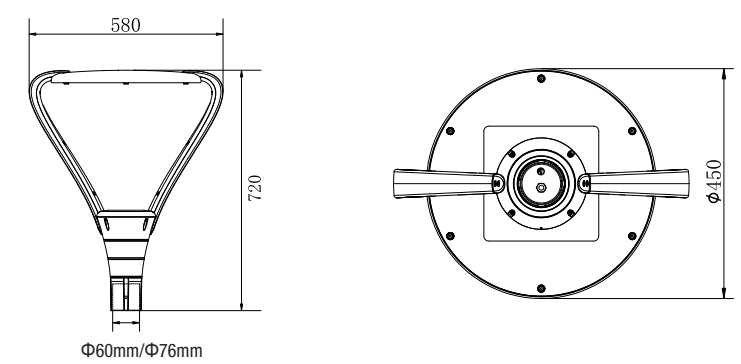

配光曲线图 Light Distribution Curve

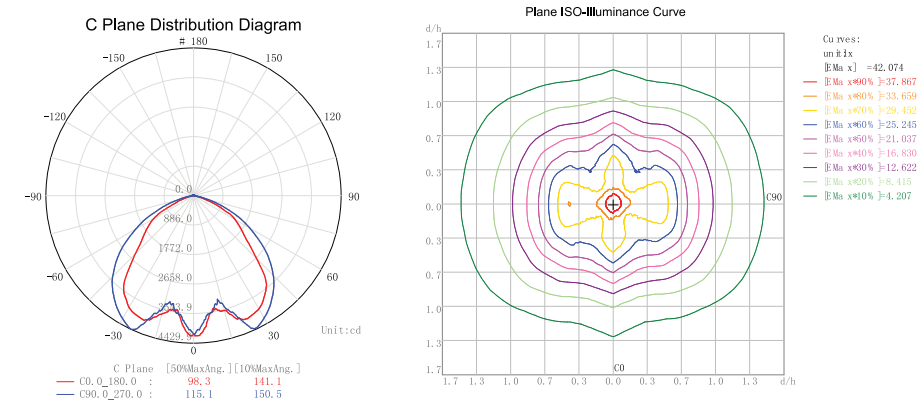

AC100-277V
输入电压
Input Voltage

Hz
50/60
频率范围
Frequency Range

PF
>0.92
功率因数
Power Factor

<15%
总谐波失真
THD

CRI
75
显色指数
Color Rendering Index

-40~45℃
工作环境温度
Temperature of Working Condition

20~90%
工作环境湿度
Humidity of Working Condition

100000H
(L70B50)
使用寿命
Life Time

IP66
防护等级
Protection Grade