

LED Garden Light



Muse
JD-1057



Philips Lumileds 5050 or 3030 Led
Philips/Meanwell/Inventronics driver

- High strength aluminum die casting material,surface anti-aging electrostatic spray processing,super resistance to corrosion.
- Glass cover,high strength impact resistance.
- Input Voltage:AC100-277V,50/60Hz,IP66,Ik09
- Bracket:76mm
- Spare parts for choice
- 10 kv/20kv SPD
- 0-10v dimming driver
- auto switch
- Nema socket

CE CB




技术参数 Specification

产品型号	Product Code	JD-1057A	JD-1057B	JD-1057C
LED数量	LED Quantity	48pcs 3030	108pcs 3030	192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	130LM/W	130LM/W	130LM/W
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40℃-50℃	-40℃-50℃	-40℃-50℃
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	100000H (L70B50)	100000H (L70B50)	100000H (L70B50)
防护等级	Protection Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ76mm/Φ60mm	Φ76mm/Φ60mm	Φ76mm/Φ60mm
安装高度	Installation Height	3-5mm	5-7mm	8-10mm
净重	Net Weight	6kg	7kg	8kg
毛重	Gross Weight	7kg	8kg	9kg
产品尺寸	Product Size	450x450x318mm	450x450x318mm	450x450x318mm
包装尺寸	Packing Size	555x505x270mm	555x505x270mm	555x505x270mm


注:包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

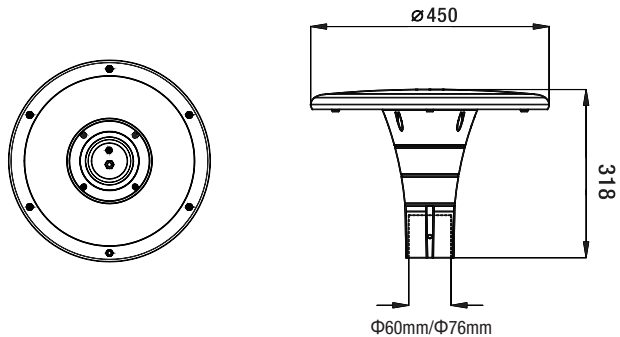

配光曲线图 Light Distribution Curve

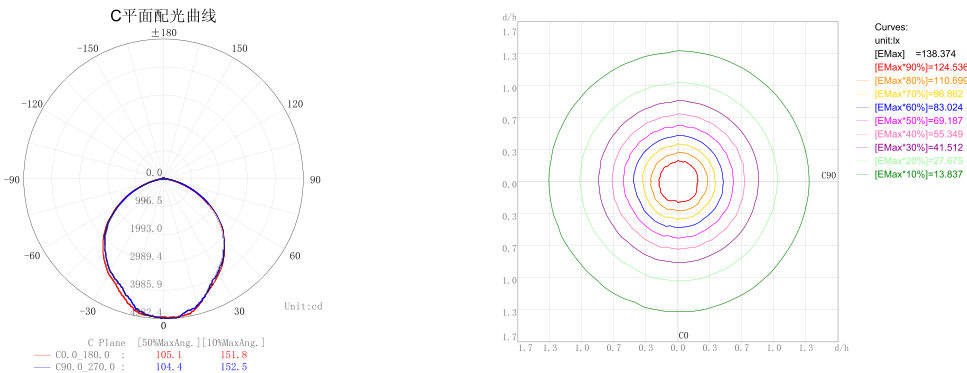

AC100-277V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~45℃ 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	100000H (L70B50) 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	---	---	--	----------------------------------