

Nova

JD-LH01



LED Linear Light

- LED: Lumileds 5050
- Driver: Meanwell/Philips/Inventronics/Moso and So on
Aluminum die casting material, surface anti-aging electrostatic. Spray processing, super resistance to corrosion.
- Lens: PC/PMMA
- Input Voltage: AC100-277V, 50/60Hz, IP66, Ik08.
- 5 years warranty.
- Mainly including the following: Architecture, Bridges, Parks, Commercial advertising, Urban landscapes.

技术参数 Specification

产品型号	Product Code	JD-LH01-L300	JD-LH01-L600	JD-LH01-L1100
额定功率	Rate Power	60W	100W	200W
LED数量 (5050)	LED Quantity(5050)	40pcs	88pcs	160pcs
光通量 (5050)	Luminous Flux(5050)	140-160LM/W	140-160LM/W	140-160LM/W
透镜 (5050)	Lens(5050)	10pcs 4in1	22pcs 4in1	40pcs 4in1
输入电压	Input Voltage	AC100-277V		
频率范围	Frequency Range	50/60Hz		
显色指数	CRI	RA70/RA80		
色温	CCT	2200K-6500K		
色容差	SDCM	<5		
驱动器	Driver	Meanwell/Philips/Inventronics/Moso and so on		
总谐波失真	THD	<15%		
功率因数	Power Factor(PF)	PF>0.95		
光谱功率分布	SPD	10KV(Default)/20Kv		
工作环境温度	Temperature of working condition	-20℃-40℃		
工作环境湿度	Humidity of working condition	20%-90%		
LED寿命	LED life time	100000H		
防护等级	IP Rating	IP66		
抗冲击等级	IK Rating	IK08		
主体材质	Body Material	ADC12/6063		
透镜材质	Lens Material	PC/PMMA		
扩散板材质	Diffuser material	Tempered Glass		
可调光性	Dimmable	1-10V/DALI /Time Control		
绝缘等级	Insulation grade	Class I(Default)/Class II		
可选配件	Optional Accessories	NEMA socket (3/5/7 pins)/short cap/Photocell/ZHAGA		
保修	Warranty	5 years		
安装方式	Mounting Type	Silent installation/hoisting		
安装高度	Installation Height	3-5m	5-8m	8-12m
净重	Net Weight	2kg	3kg	4kg
毛重	Gross Weight	3kg	4kg	5kg
产品尺寸	Product Size	203x80x302mm	203x80x610mm	203x80x1067mm
包装尺寸	Packing Size	220x95x320mm	220x95x630mm	220x95x1085mm


注:包装尺寸为外尺寸

本表所示技术参数均在环境温度为25℃,湿度35%的实验室环境中测得。

Packing size is outer size of box

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

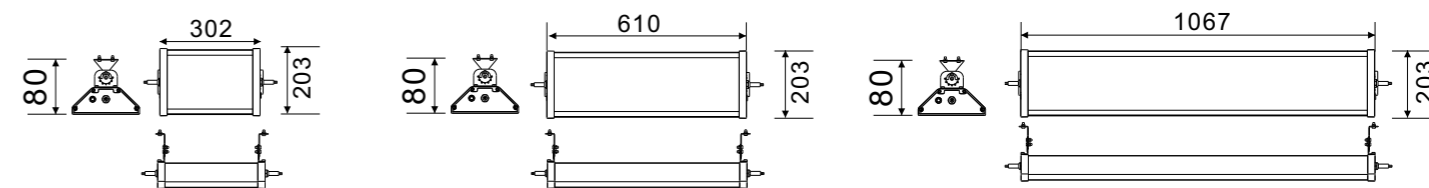

配光曲线图 Light Distribution Curve

