


MA-160-01/LED Flood Light



Size:

Unit (mm)

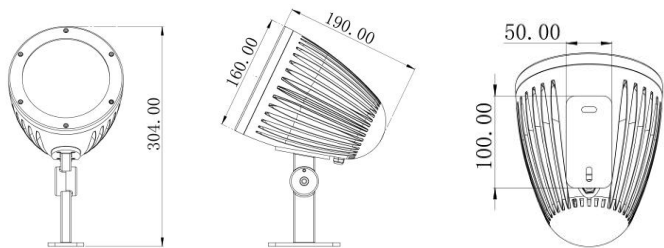


MA-160-01/LED Flood Light



Features:

- 1. The feather ball lamp body with design patent conforms to the application vision of ancient tile surface
- 2. The whole structure waterproof adopts mechanical pressure locking silica gel pad technology to ensure high and low temperature durability
- 3. Special ultra long distance precise projection technology and 93% light transmittance ultra clear glass
- 4. Adopt die-casting aluminum lamp body and composite metal high efficiency heat dissipation patent technology
- 5. According to the site installation requirements, various mounting brackets can be selected

Parameter:

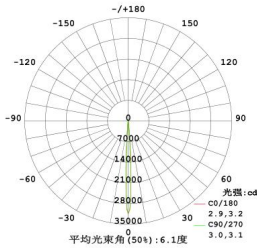Lamp Parameter		LED parameter	
Beam Angle	6°,8°,15°,20°,30°,45°,60°	LED chip	CREE
case material/color	Die-casting aluminum(Grey)	LED Item	XTE/XHP35
Cover material/color	Ultra clear tempered glass	CCT	Single color
IP rate	IP66 structure waterproof	LED Power	5W /10W
Lamp Power	36W/48W/54W	Other Parameter	
Input Voltage	DC24V/AC85-265V	Cable size	3pins 1.5mm² rubber cable
PF	0.9	Cable length	300mm
Light Efficiency	85lm/w(white)	Fixing clip	Die-casting aluminum
Light angle	180°adjustable	Light distribution	
Cable location	From the bottom		
Control way	ON-OFF		
Environment temperature	-30°C~+35°C		