

## PY602 SERIES PRESSURE & TEMPERATURE INDICATOR

### FEATURES


- ⊙ Automatic zero
- ⊙ Automatic calibration
- ⊙ Two configurable alarms High/Low/Off
- ⊙ RS485 communication supported
- ⊙ Retransmission of variable process values 4~20mA
- ⊙ 0~10mA, 0~20mA, 0~10V, 0~5V, 1~5V
- ⊙ Thermocouple type J,E,K or Pt100 inputs option




### SPECIFICATIONS

|                              |                                                                 |
|------------------------------|-----------------------------------------------------------------|
| Dimension                    | 96x96mm, 48Wx96mmH, 96Wx48Hmm                                   |
| Pressure range               | 0~35 to 2000bar (Adjustable)                                    |
| Engineering Unit             | MPa, Bar, PSI                                                   |
| Power supply                 | 85~265VAC, 24VDC                                                |
| Alarm output                 | 5A/250VAC resistive                                             |
| Alarm type                   | OFF, High, Low, High/Low, High/High, High/High/Low relay output |
| Pressure Input signal        | 2.0mV/V, 3.0mV/V, 3.33mV/V, 0~20mA, 4~20mA, 0~10V, 0~5V, 1~5V   |
| Temperature Input signal     | J, K, E, Pt100                                                  |
| Retransmission output signal | 0~10mA, 0~20mA, 4~20mA<br>0~10V, 0~5V, 1~5V                     |
| Communication Interface      | RS485                                                           |
| Operating Temperature        | -10°C ~50°C                                                     |


### DIMENSION

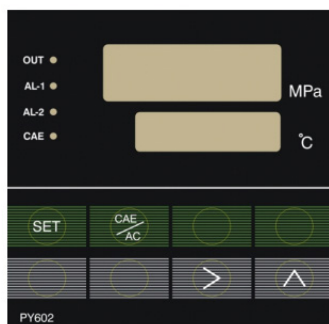

PY602 96\*96mm

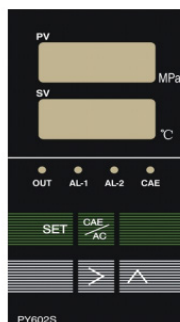


PY602S 48\*96mm

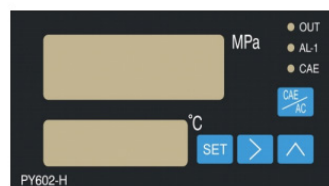

PY602H 96\*48mm

## CUTOUT

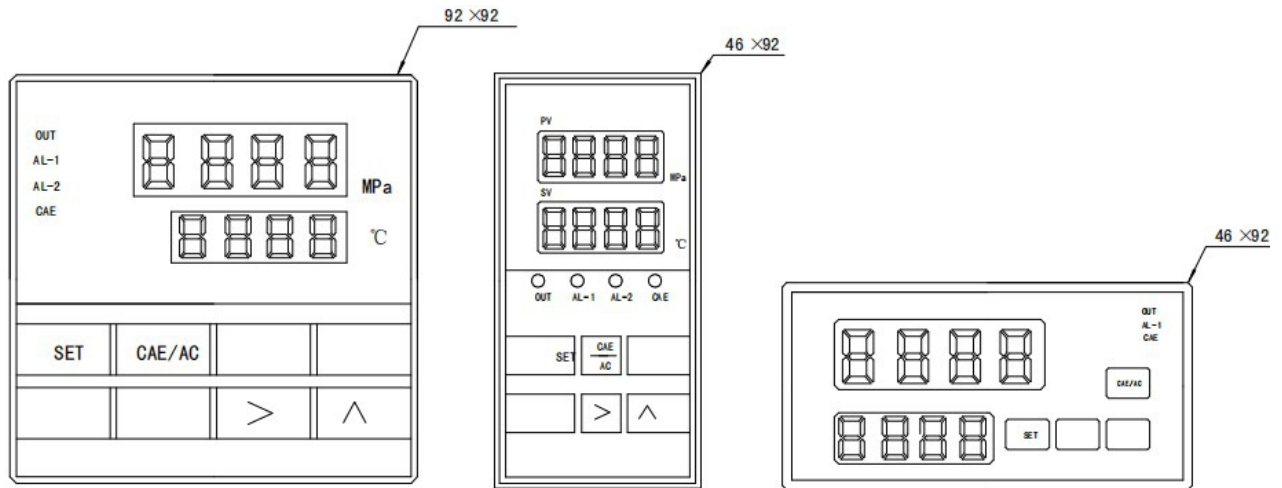

## ORDER FORMAT

PY602X-XX-XXX-XXX-XX-XXX-XXX-XXX

