



**YAOXING**  
ALUMINUM



## **WINDOW&DOOR**

FOCUS ON BIGHOUSE  
DOORS AND WINDOWS

# COMPANY PROFILE

## 公司简介

Founded in 1993, Yaoxing Aluminum stands as a trusted name in the global door & window aluminum profile industry, boasting over three decades of expertise in manufacturing high-quality aluminum profiles. Our products have been exported to more than 50 countries and regions, securing strong trust from clients worldwide with consistent quality and reliability.

We own a 40,000-square-meter modern production base, equipped with 6 advanced extrusion lines, 1 anodizing line, 1 powder coating line, 2 wood grain transfer lines, and 1 sandblasting line. With a monthly output exceeding 1,500 tons, we possess robust production capacity to ensure on-time delivery even for large-volume, time-sensitive orders—laying a solid foundation for stable cooperation with global partners.

Adhering to a customer-centric and forward-thinking philosophy, we integrate quality control into every link from R&D to pre-sales and after-sales services. Focusing on the core demands of door & window applications, our profiles are meticulously designed to enhance energy efficiency, safety, sound insulation, comfort, durability, and intelligence. We continuously pursue technological breakthroughs to fully meet the personalized needs of high-performance customized system doors and windows.





# ITEM/RECORD

## 目 / 录

### I ENERGY SAVING AND HEAT-INSULATING WINDOW SERIES 节能隔热窗系列

1 . 70 level open system window 70平开系统窗	05
2 . 75 inner opening and inner reversing system window 75内开内倒系统窗	06
3 . 75 external opening system window 75外开系统窗	07
4 . 95 pairs of internal opening system windows 95双内开系统窗	08
5 . 113 broken bridge system flat window 113断桥系统平开窗	09
6 . 120 bridge breaking system casement window 120断桥系统平开窗	10
7 . American style 120 bridge panoramic system window 美式120断桥全景系统窗	11
8 . 75 double track sliding window/110 three track bridge cutoff sliding window 75双轨推拉窗/110三轨断桥推拉窗	12
9 . 128 panoramic bridge sliding window 128全景断桥推拉窗	13
10. 128 panoramic floating sliding window 128全景悬浮推拉窗	14
11. 158 electric lifting window 158电动升降窗	15

### II ENERGY SAVING POPULAR SERIES 节能隔热热门系列

1 . 75 swing door 75平开门	19
2 . 133 insulated bridge break sliding door 133隔热断桥推拉门	20
3 . 200 insulated bridge sliding door 200隔热断桥推拉门	21
4 . 73 insulated bridge folding door 73隔热断桥折叠门	22

### III ALUMINUM DOORS AND WINDOWS 普铝门窗

1 . 50 casement windows 50平开窗	24
2 . 78 non broken bridge window screen integrated flat window 78非断桥窗纱一体平开窗	25
3 . 68 double track sliding window/100 triple track sliding window 68双轨推拉窗 /100 三轨推拉窗	26
4 . 100 jendela geser tiga rel(paket) 100三轨推拉窗(带包套)	27
5 . 50 French casement windows 50法式平开窗	28
6 . 70 French casement windows 70法式平开窗	29
7 . 130 French casement windows 130法式平开窗	30
8 . 65 medium narrow sliding door 65中窄推拉门	31
9 . 70 heavy-duty narrow sliding door 70重型中窄推拉门	32
10. 100 heavy-duty sliding door 100重型推拉门	33
11. 120 day panoramic sliding door 120天境全景推拉门	34
12. 150 day panoramic sliding door 150天境全景推拉门	35
13. 73 non broken bridge folding door 73非断桥折叠门	36

# 30MM ULTRA WIDE INSULATION STRIP

Extraordinary ultimate insulation and heatpreservation

30mm ultra wide insulation strip


30mm 超宽隔热条


The window frame and glass joints are filled with insulation cotton to reduce gaps, retain heat, and increase sealing

窗框和玻璃接缝填充隔热棉，以减少缝隙，保持热量，增加密封性。

Ultra wide duckbill rubber strip

超宽鸭嘴胶条

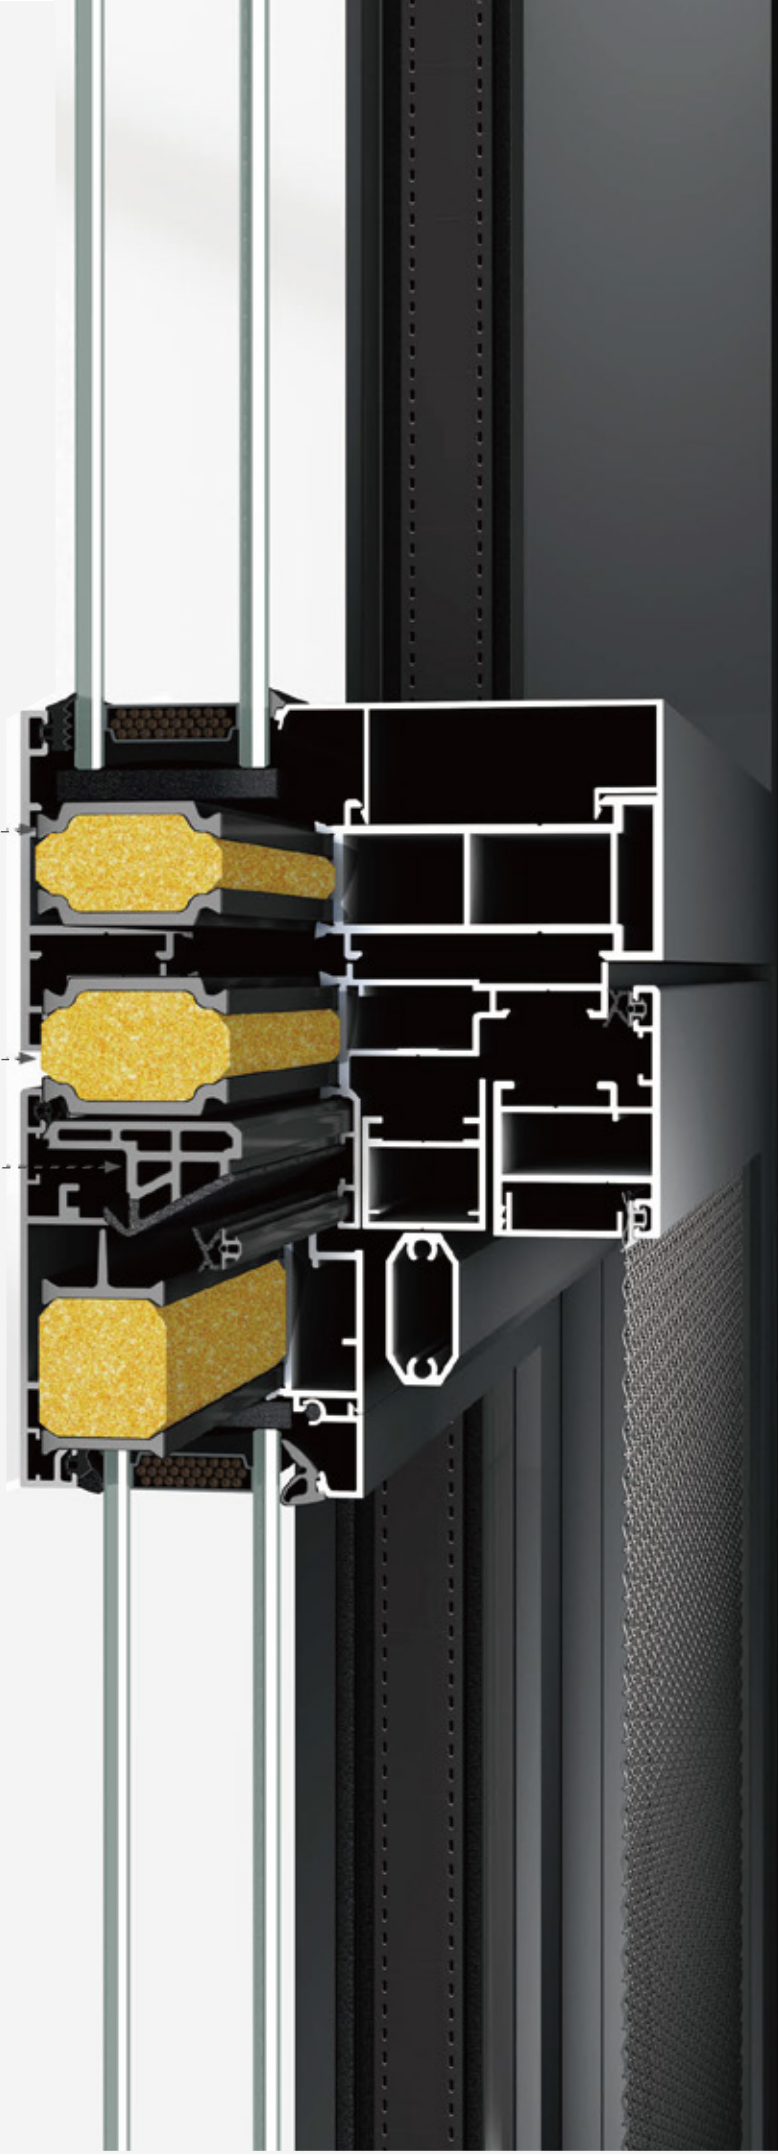

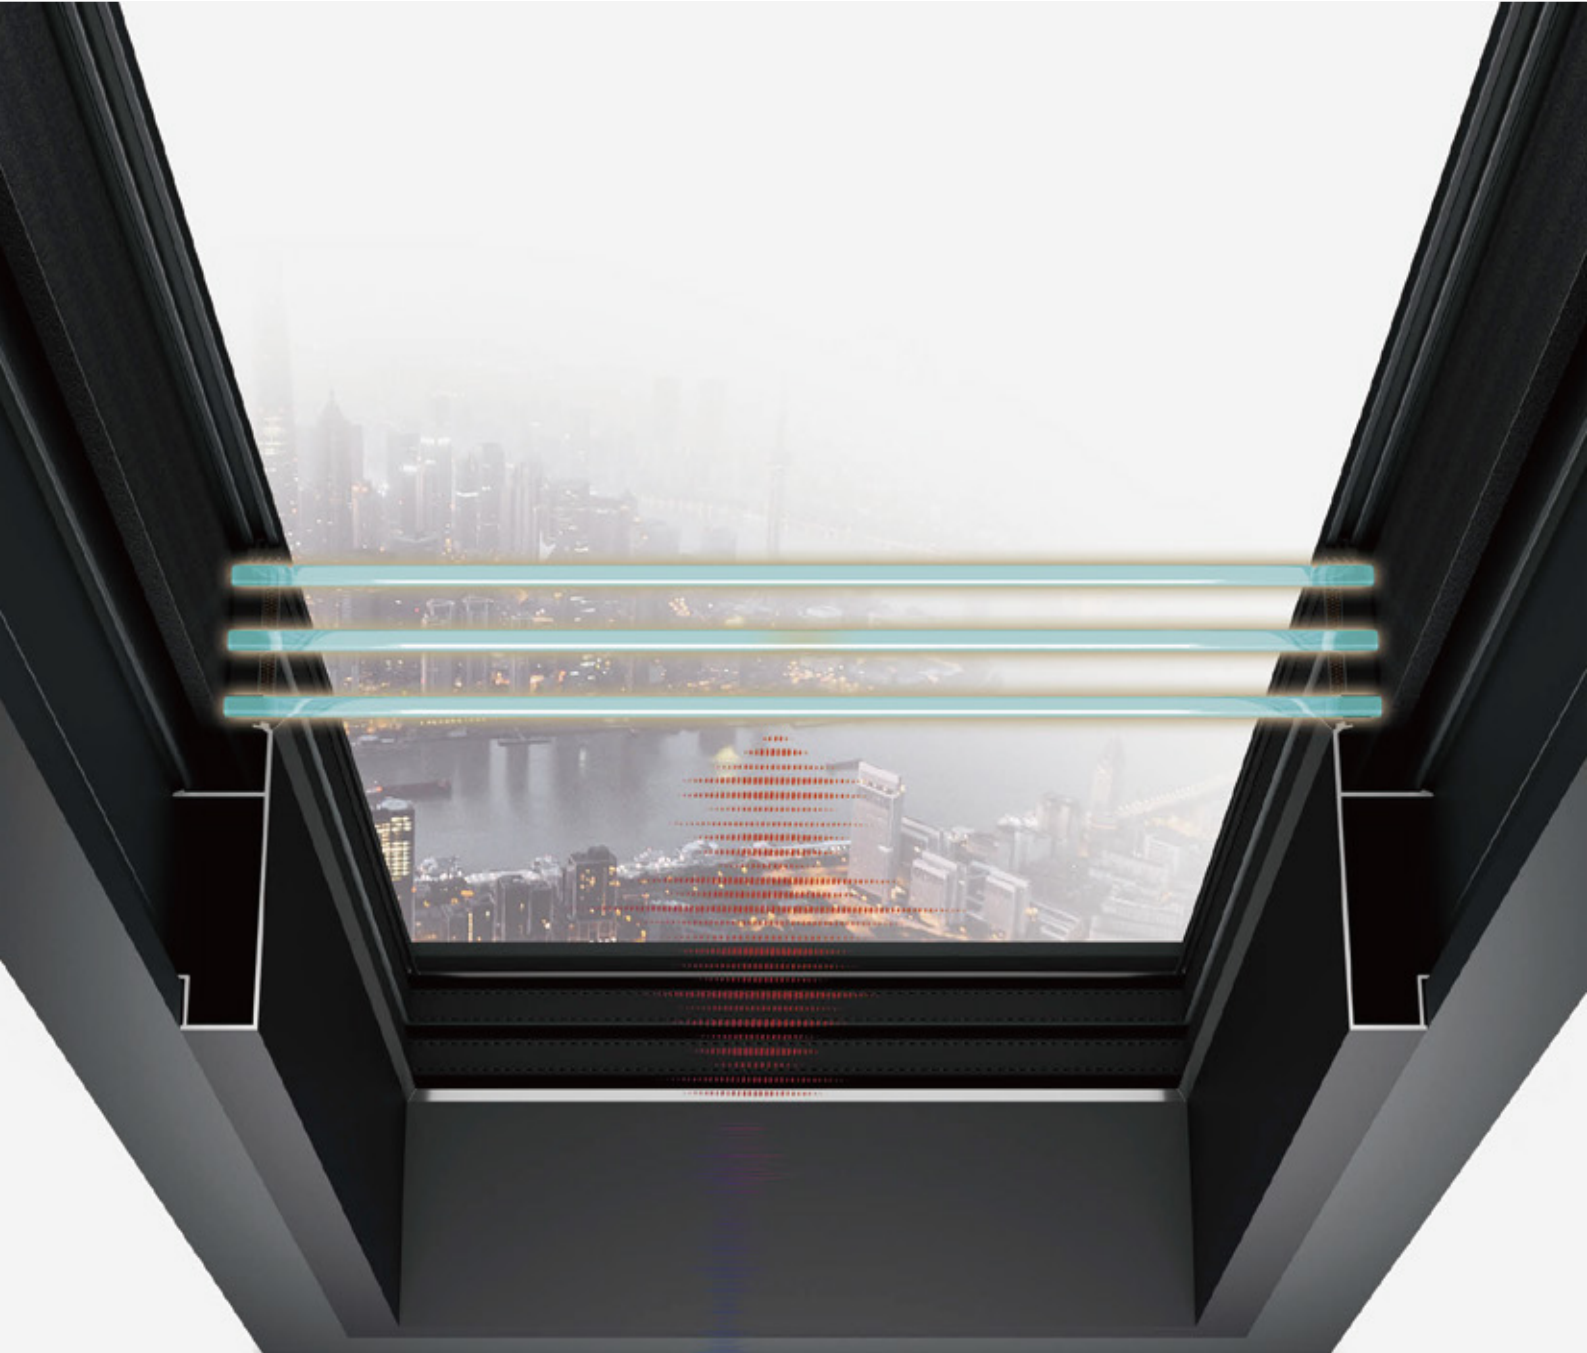

## THREE GLASS AND TWO CAVITY DESIGN

三玻两腔体设计

Adopting a 5+12A+5+12A+5 triple glass two cavity design, the ultra large insulated glass is filled with inert gas, effectively reducing heat transfer and noise disturbance creating a comfortable and comfortable environment

采用 5+12A+5+12A+5 三玻两腔体设计超大中空玻璃, 内充性气体, 有效减少热量传递以及噪音的骚扰, 打造舒适安逸环境。




# ENERGY SAVING AND HEAT-INSULATING WINDOW SERIES

节能隔热窗系列

谢府雅居

# 70 LEVEL OPEN SYSTEM WINDOW

70平开系统窗 ▶▶

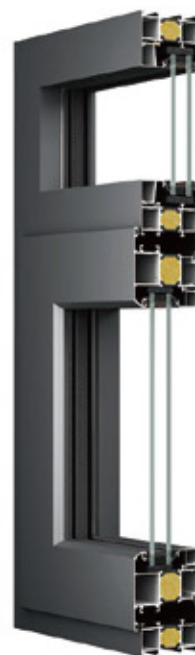

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	2.6(W/m²k)	35 (3级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5mm+20Ar+5Low-E	1.5(W/m²k)	35 (3级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	45 (5级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	45 (5级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 70mm
- Profile: 6063-T5 native aluminum material Thickness: 1.4mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray metallic coffee (custom color)
- 边框宽度: 70mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修) 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Outward Opening  
Hanging Downwards  
外开下悬



Hanging Downwards  
外下悬



External Flat Opening  
外平开

# 75 INNER OPENING AND INNER REVERSING SYSTEM WINDOW

75 内开内倒系统窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 75mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 75mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Internally Open  
内平开



Internally Open  
And internally Inverted  
内开内倒

# 75 EXTERNAL OPENING SYSTEM WINDOW

75 外开系统窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 75mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray metallic coffee (custom color)
- 边框宽度: 70mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修) 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Outward Opening  
Hanging Downwards  
外开下悬



Hanging Downwards  
外下悬



External Flat Opening  
外平开

# 95 PAIRS OF INTERNAL OPENING SYSTEM WINDOWS

95 双内开系统窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²K)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+22Ar+5Low-E	1.5(W/m²K)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²K)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²K)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 95mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 95mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Double  
Internal Opening  
双内开



Internally Open  
And internally Inverted  
内开内倒

# 113 BROKEN BRIDGE SYSTEM FLAT WINDOW

## 113 断桥系统平开窗 ▶▶



### PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	2.6(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+20Ar+5Low-E	1.5(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9Ar+5Low-E	1.2(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9A+5Low-E Double silver	1.0(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

### OPTIONAL PRESSURE LINE 可选压线



### OPTIONAL STAINLESS STEEL GUARDRAIL 选配不锈钢护栏



### PRODUCT PARAMETERS 产品参数

- Frame size: 113mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 113mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

### PRODUCT HARDWARE 产品五金



### OPENING METHOD 开启方式



External Flat Opening  
平开窗



External opening  
and downward suspension  
外开下悬

# 120 BRIDGE BREAKING SYSTEM CASEMENT WINDOW

120 断桥系统平开窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+27A+5mm	2.5(W/m²·k)	38 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+27Ar+5Low-E	1.4(W/m²·k)	38 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·k)	49 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·k)	49 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

### OPTIONAL PRESSURE LINE 可选压线



### OPTIONAL STAINLESS STEEL GUARDRAIL 选配不锈钢护栏



## PRODUCT PARAMETERS 产品参数

- Frame size: 120mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 120mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Double Internal Opening  
双内开



Internally Open  
And internally Inverted  
内开内倒

# AMERICAN STYLE 120 BRIDGE PANORAMIC SYSTEM WINDOW

美式120断桥全景系统窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+18A+5mm	2.6(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+18Ar+5Low-E	1.5(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9Ar+5Low-E	1.2(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9A+5Low-E Double silver	1.0(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 120mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 120mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



External Flat Opening  
平开窗



External opening  
and downward suspension  
外开下悬

# 75 DOUBLE TRACK SLIDING WINDOW/110 THREE TRACK BRIDGE CUTOFF SLIDING WINDOW

75 双轨推拉窗 / 110 三轨断桥推拉窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+12A+5mm	3.0(W/m²k)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+12Ar+5Low-E	1.8(W/m²k)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)


## PRODUCT PARAMETERS 产品参数

- Frame size: 75/110mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 75/110mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式

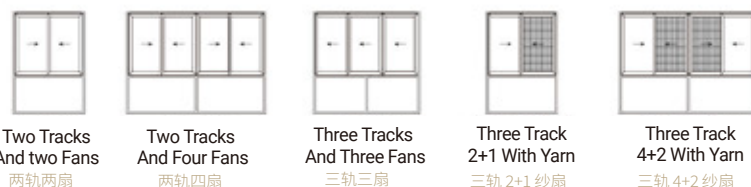

Two Tracks  
And two Fans  
两轨两扇

Two Tracks  
And Four Fans  
两轨四扇


Three Tracks  
And Three Fans  
三轨三扇

Three Track  
2+1 With Yarn  
三轨 2+1 纱扇

Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 128 PANORAMIC BRIDGE SLIDING WINDOW

## 128全景断桥推拉窗

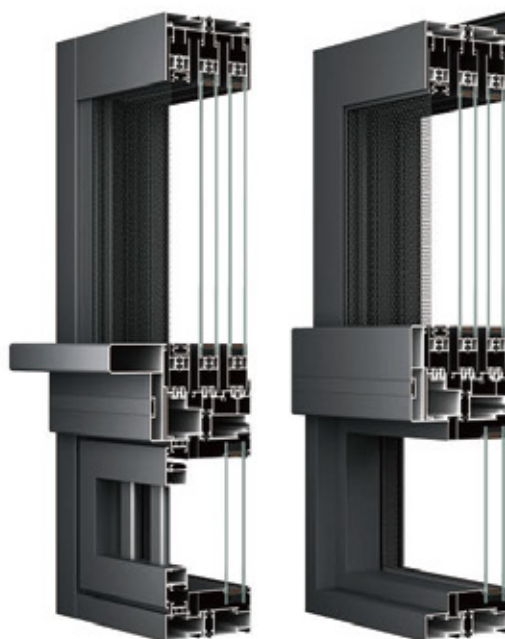

### PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+15A+5mm	2.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)
5mm+15Ar+5Low-E	1.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)

### PRODUCT PARAMETERS 产品参数

- Frame size: 128mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 128mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

### PRODUCT HARDWARE 产品五金



### OPENING METHOD 开启方式



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 128 PANORAMIC FLOATING SLIDING WINDOW

128全景悬浮推拉窗 ▶▶-----



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+15A+5mm	2.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)
5mm+15Ar+5Low-E	1.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 128mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 128mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 158 ELECTRIC LIFTING WINDOW

158 电动升降窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	2.8(W/m²·k)	38 (3级 level)	480Pa	≤ 3.5 (6级 level)	3.2 (5级 level)
5mm+20Ar+5Low-E	1.8(W/m²·k)	38 (3级 level)	480Pa	≤ 3.5 (6级 level)	3.2 (5级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 158mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 158mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Up And Downscending  
And Descending  
上下升降

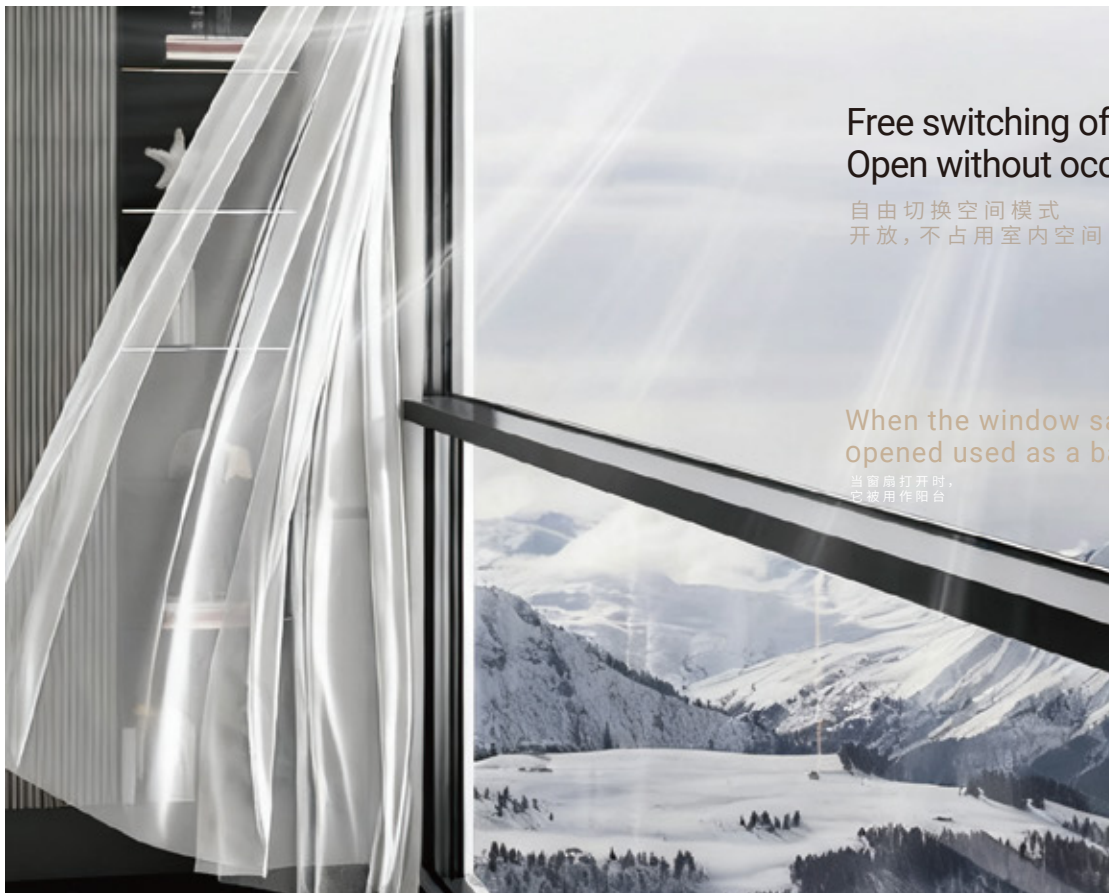


Free switching of spatial modes  
Open without occupying indoor space

自由切换空间模式  
开放，不占用室内空间


When the window sash is  
opened used as a balcony

当窗扇打开时，  
它被用作阳台

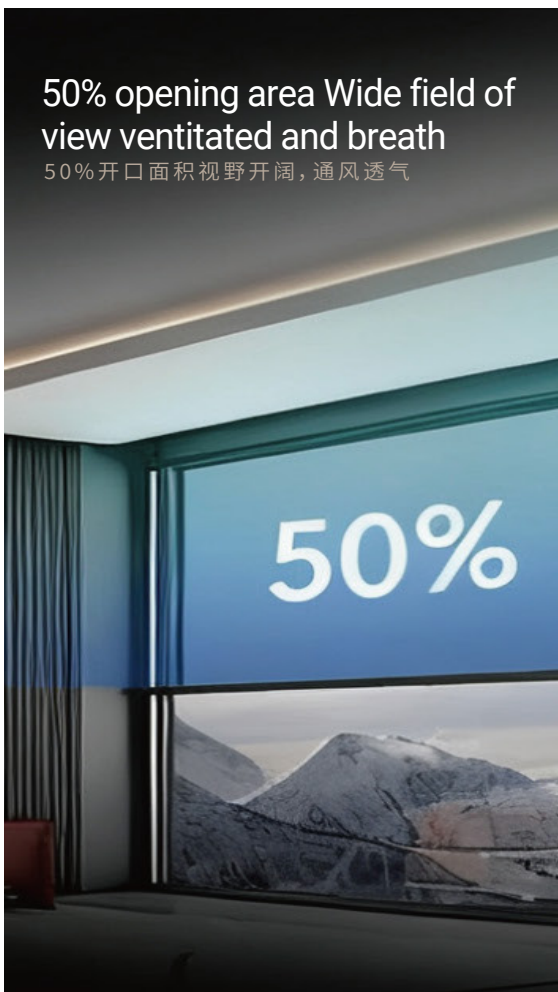

50% opening area Wide field of  
view ventilated and breath

50%开口面积视野开阔，通风透气

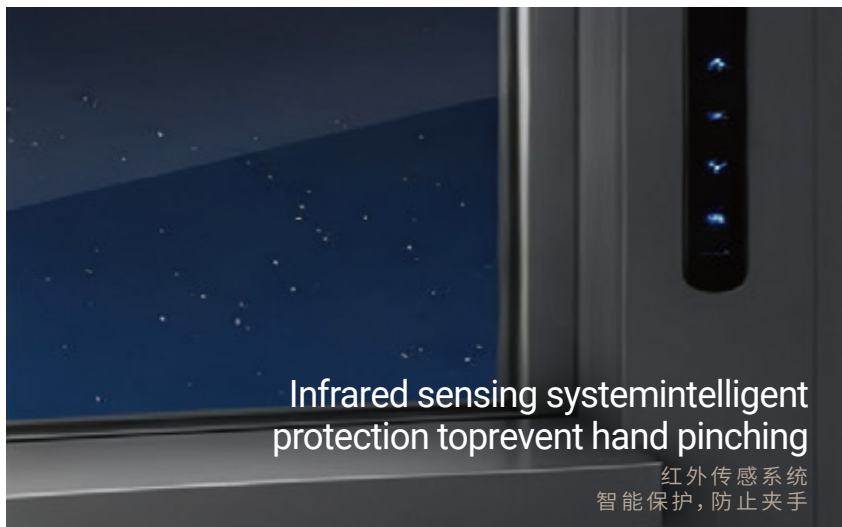

Infrared sensing system intelligent  
protection to prevent hand pinching

红外传感系统  
智能保护，防止夹手



Intelligent electric switch intelligent  
control, safe and convenient


智能电动开关智能控制，安全便捷

# MULTI CHANNEL WOOL STRIPSEALING DESIGN

多道毛条密封设计

Embedded siliconized sealing strips effectively prevent dust, mosquitoes, and insects from entering the room. Equipped with high-performance PA66 insulation strips from Ronghai, reducing energy loss and achieving superstrong insulation performance.

嵌入式硅化密封条有效防止灰尘、蚊子和昆虫进入房间。配备融海高性能PA66隔热条，减少能量损失，实现超强隔热性能。

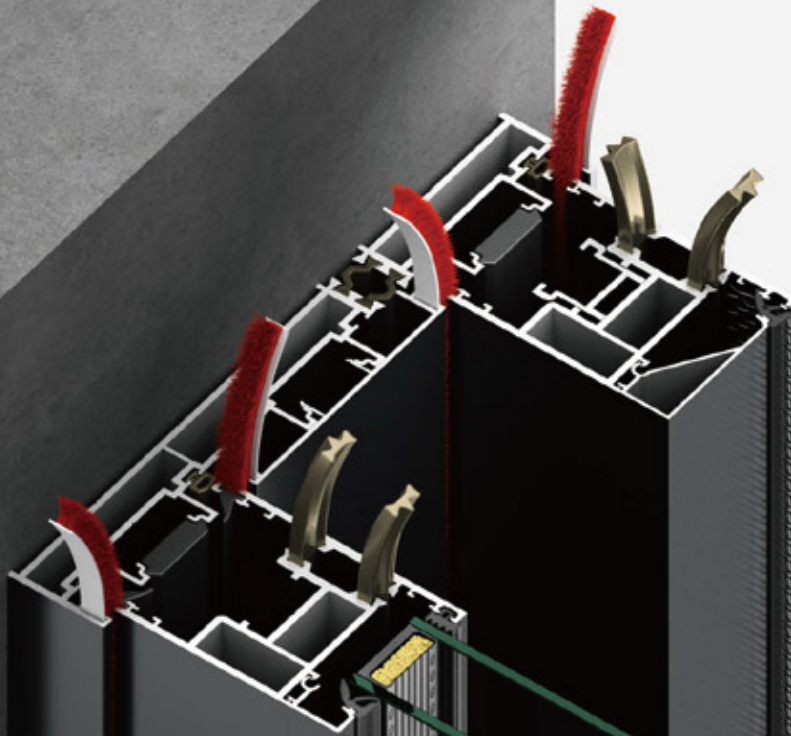


# MULTICHANNEL SEALING HOOK STRUCTURE

多道密封结构

On the basis of traditional sealing, adding multiple sealing strips effectively improves the airtightness and water tightness performance.

在传统密封的基础上,增加多条密封条,有效提高了气密性和水密性能。

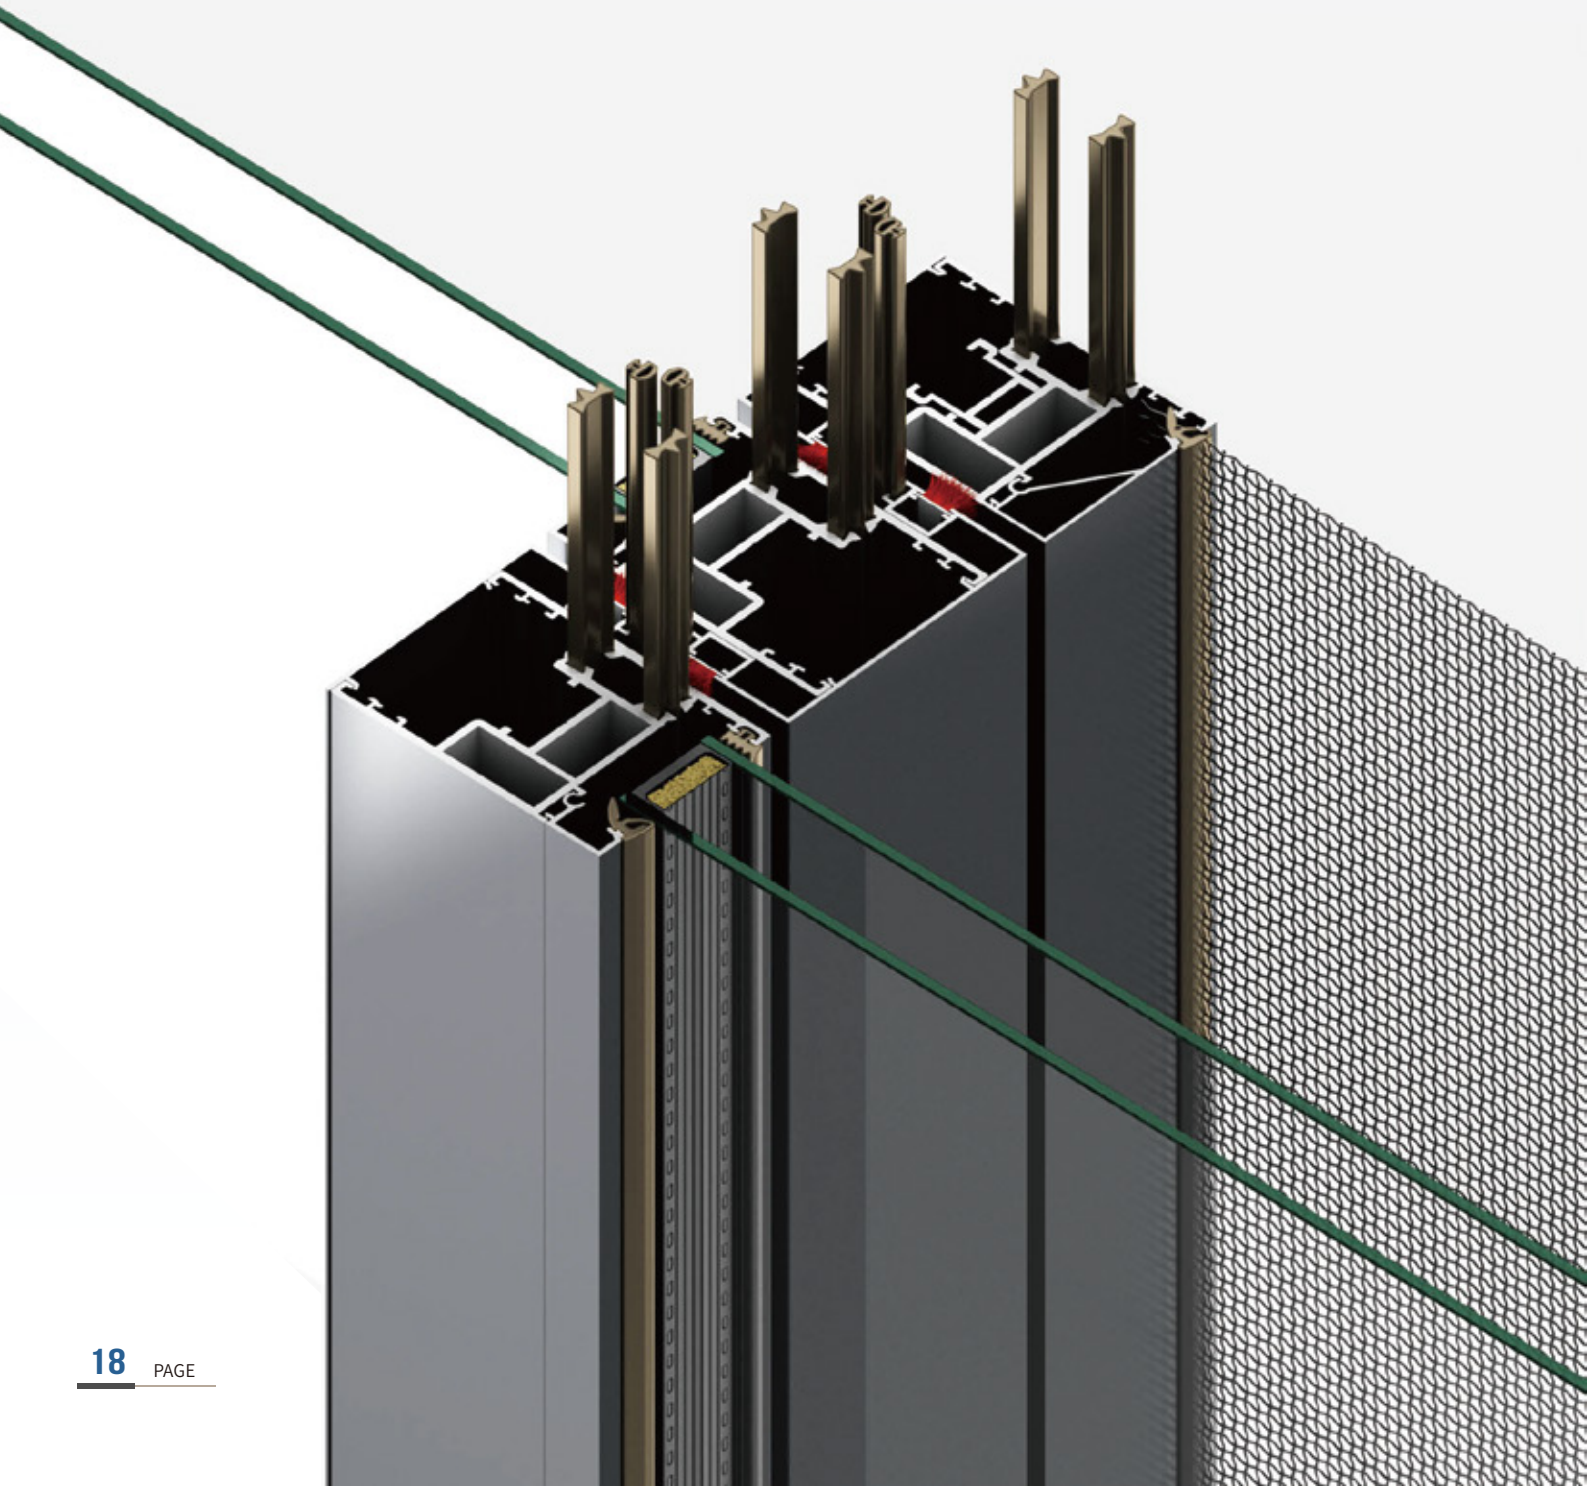

# ENERGY SAVING POPULAR SERIES

节能隔热门系列



# 75 SWING DOOR

◀◀ 75 平开门



## PRODUCT PARAMETERS 产品参数

- Frame size: 75mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.8mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 :75mm
- 型材 : 6063-T5 原铝材料
- 壁厚 :1.8mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+22Ar+5Low-E	1.5(W/m <sup>2</sup> *k)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m <sup>2</sup> *k)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

## OPENING METHOD 开启方式



Left Inside Opening  
左侧内开



Right Inside Opening  
右侧内开



Left Side Opens Outward  
左侧外开



Right Side Opens Outward  
右侧外开

## PRODUCT HARDWARE 产品五金



# 133 INSULATED BRIDGE BREAK SLIDING DOOR

◀◀ 133 隔热断桥推拉门



## PRODUCT PARAMETERS 产品参数

- Frame size: 133mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0-2.5mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 :133mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 2.0-2.5mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m <sup>2</sup> *k)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5mm+22Ar+5Low-E	1.5(W/m <sup>2</sup> *k)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m <sup>2</sup> *k)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m <sup>2</sup> *k)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)

## OPENING METHOD 开启方式



## PRODUCT HARDWARE 产品五金



# 200 INSULATED BRIDGE SLIDING DOOR

◀◀ 200 隔热断桥推拉门



## PRODUCT PARAMETERS 产品参数

- Frame size: 200mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 :200mm
- 型材 : 6063-T5 原铝材料
- 壁厚 :2.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m <sup>2</sup> *k)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5mm+22Ar+5Low-E	1.5(W/m <sup>2</sup> *k)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m <sup>2</sup> *k)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m <sup>2</sup> *k)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)


## OPENING METHOD 开启方式



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

## PRODUCT HARDWARE 产品五金



# 73 INSULATED BRIDGE FOLDING DOOR


◀◀ 73 隔热断桥折叠门



## PRODUCT PARAMETERS 产品参数

- Frame size: 73mm
  - Profile: 6063-T5 native aluminum material
  - Thickness: 1.8mm
  - Color treatment: Aksu T1010 powder (global 10-year warranty)
  - Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 73mm
  - 型材: 6063-T5 原铝材料
  - 壁厚: 1.8mm
  - 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
  - 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## OPENING METHOD 开启方式

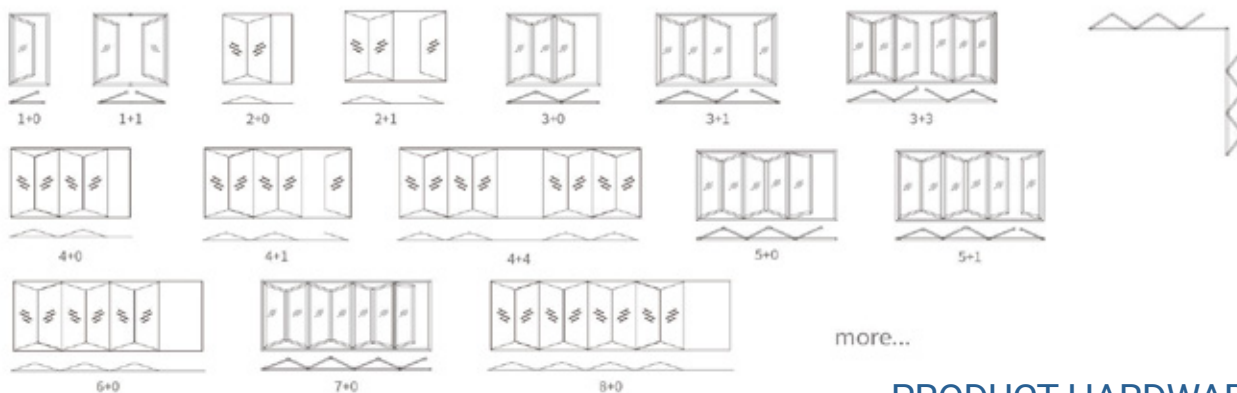

## PRODUCT HARDWARE 产品五金







# ALUMINUM DOORS AND WINDOWS

普铝门窗

# 50 CASEMENT WINDOWS

50平开窗 ▶▶



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²k)	28 (1级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)
5mm+9A+5mm	3.6(W/m²k)	33 (2级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)
5mm+9Ar+5Low-E	2.8(W/m²k)	33 (2级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 50mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 50mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Outward Opening  
Hanging Downwards  
外开下悬



Hanging Downwards  
外下悬



External Flat Opening  
外平开

# 78 NON BROKEN BRIDGE WINDOW SCREEN INTEGRATED FLAT WINDOW

◀◀ 78非断桥窗纱一体平开窗



## PRODUCT PARAMETERS 产品参数

- Frame size: 78mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 78mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m <sup>2</sup> *k)	28 (1级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)
5mm+9A+5mm	3.6(W/m <sup>2</sup> *k)	33 (2级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)
5mm+9Ar+5Low-E	2.8(W/m <sup>2</sup> *k)	33 (2级 level)	460Pa	≤ 4.2 (6级 level)	1.8 (2级 level)

## OPENING METHOD 开启方式

## PRODUCT HARDWARE 产品五金



External Flat Opening  
平开窗



External opening  
and downward suspension  
外开下悬




# 68 DOUBLE TRACK SLIDING WINDOW/100 TRIPLE TRACK SLIDING WINDOW

68双轨推拉窗/100三轨推拉窗 ▶▶



OPTIONAL TRACKS 可选轨道

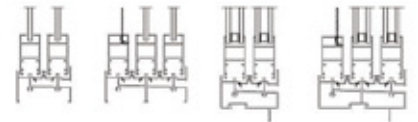

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²·k)	28 (1级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+9A+5mm	3.6(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+9Ar+5Low-E	2.8(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 68/100mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 68/100mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Two Tracks  
And two Fans  
两轨两扇



Two Tracks  
And Four Fans  
两轨四扇



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 100 JENDELA GESER TIGA REL(PAKET)

◀◀ 100 三轨推拉窗(带包套)



## PRODUCT PARAMETERS 产品参数

- Frame size: 100mm
- Profile: 6063-T5 native aluminum material
- Thickness: 1.4mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 : 100mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 1.4mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²·k)	28 (1级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+9A+5mm	3.6(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+9Ar+5Low-E	2.8(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)


## OPENING METHOD 开启方式



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

## PRODUCT HARDWARE 产品五金



# 50 FRENCH CASEMENT WINDOWS

50 法式平开窗 ▶▶



## PRODUCT PERFORMANCE 产品性能



隔热性能  
THERMAL  
INSULATION

5 级 level



隔音性能  
SOUND  
INSULATION

4 级 level



水密性能  
WATERPROOF

4 级 level



气密性能  
AIR TIGHTNESS

5 级 level



抗风压性能  
WIND RESISTANT

6 级 level

## PRODUCT PARAMETERS 产品参数

- Frame size: 50mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- Glass configuration: 8mm single galss tempered glass
- 边框宽度 : 68/100mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 1.4mm
- 颜色处理 : 阿克苏 T1010 粉末 ( 全球 10 年保修 )
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 ( 自定义颜色 )
- 玻璃配置 : 8mm 单层钢化玻璃

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Hanging Downwards  
外下悬



External Flat Opening  
外平开

# 70 FRENCH CASEMENT WINDOWS

◀◀ 70 法式平开窗



## PRODUCT PARAMETERS 产品参数

- Frame size: 70mm
  - Profile: 6063-T5 native aluminum material
  - Thickness: 2.0mm
  - Color treatment: AksuT1010 powder (global 10-year warranty)
  - Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
  - Glass configuration: 5mm + 27a + 5mm
- 边框宽度: 70mm
  - 型材: 6063-T5 原铝材料
  - 壁厚: 2.0mm
  - 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
  - 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
  - 玻璃配置: 5mm+27A+5mm

## PRODUCT PERFORMANCE 产品性能



隔热性能  
THERMAL  
INSULATION

5 级 level



隔音性能  
SOUND  
INSULATION

4 级 level



水密性能  
WATERPROOF

4 级 level



气密性能  
AIR TIGHTNESS

5 级 level



抗风压性能  
WIND RESISTANT

6 级 level

## OPENING METHOD 开启方式



Hanging Downwards  
外下悬



External Flat Opening  
外平开

## PRODUCT HARDWARE 产品五金



# 130 FRENCH CASEMENT WINDOWS

130 法式平开窗 ▶▶



## PRODUCT PERFORMANCE 产品性能



隔热性能  
THERMAL  
INSULATION

5 级 level



隔音性能  
SOUND  
INSULATION

4 级 level



水密性能  
WATERPROOF

4 级 level



气密性能  
AIR TIGHTNESS

5 级 level



抗风压性能  
WIND RESISTANT

6 级 level

## PRODUCT PARAMETERS 产品参数

- Frame size: 130mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- Glass configuration: 5mm+27A+5mm
- 边框宽度: 68/100mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
- 玻璃配置: 5mm+27A+5mm

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Hanging Downwards  
外下悬



External Flat Opening  
外平开

# 65 MEDIUM NARROW SLIDING DOOR

◀◀ 65 中窄推拉门



OPTIONAL TRACKS 可选轨道



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+16A+5mm	3.0(W/m²k)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.8 (2级 level)
5mm+16Ar+5Low-E	1.8(W/m²k)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.8 (2级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 106/161mm
- Profile: 6063-T5 native aluminum material
- Thickness: frame: 1.4mm/glass fan: 3.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 : 68/100mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : frame: 1.4mm/glass fan: 3.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Two Tracks  
And two Fans  
两轨两扇



Two Tracks  
And Four Fans  
两轨四扇



Three Tracks  
And Three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 70 HEAVY-DUTY NARROW SLIDING DOOR

70 重型中窄推拉门 ▶▶



## OPTIONAL TRACKS 可选轨道



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	3.0(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)
5mm+20Ar+5Low-E	1.8(W/m²·k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 126/190mm
- Profile: 6063-T5 native aluminum material
- Thickness: frame: 1.8mm/glass fan: 3.0mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 126/190mm
- 型材: 6063-T5 原铝材料
- 壁厚: frame: 1.8mm/glass fan: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Two Tracks  
And two Fans  
两轨两扇



Two Tracks  
And four Fans  
两轨四扇



Three Tracks  
And three Fans  
三轨三扇



Three Track  
2+1 With Yarn  
三轨 2+1 纱扇



Three Track  
4+2 With Yarn  
三轨 4+2 纱扇

# 100 HEAVY-DUTY SLIDING DOOR

◀◀ 100 重型推拉门



OPTIONAL TRACKS 可选轨道



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	3.0(W/m <sup>2</sup> *k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)
5mm+20Ar+5Low-E	1.8(W/m <sup>2</sup> *k)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size:126/190mm
- Profile: 6063-T5 native aluminum material
- Thickness: frame:1.8mm/glass fan:2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 :126/1900mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : frame:1.8mm/glass fan:2.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



# 120 DAY PANORAMIC SLIDING DOOR

120天境全景推拉门 ▶▶



## OPTIONAL TRACKS 可选轨道



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+27A+5mm	2.5(W/m²k)	36 (3级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5mm+27Ar+5Low-E	1.8(W/m²k)	36 (3级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5+12Ar+5+12Ar+5Low-E	1.4(W/m²k)	46 (5级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5+12Ar+5+12A+5Low-E Double silver	1.1(W/m²k)	46 (5级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size: 112/173mm
- Profile: 6063-T5 native aluminum material
- Thickness: frame: 1.8mm/glass fan: 3.0mm
- Color treatment: Aksu T1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度: 112/173mm
- 型材: 6063-T5 原铝材料
- 壁厚: frame: 1.8mm/glass fan: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Two Tracks  
And two Fans  
两轨两扇




Two Tracks  
And Four Fans  
两轨四扇

# 150 DAY PANORAMIC SLIDING DOOR

◀◀ 150 天境全景推拉门



OPTIONAL TRACKS 可选轨道



## PRODUCT PERFORMANCE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+27A+5mm	2.5(W/m²k)	36 (3级 level)	600Pa	≤ 4.2 (6级 level)	4.6 (8级 level)
5mm+27Ar+5Low-E	1.5(W/m²k)	36 (3级 level)	600Pa	≤ 4.2 (6级 level)	4.6 (8级 level)
5+12Ar+5+12Ar+5Low-E	1.3(W/m²k)	46 (5级 level)	600Pa	≤ 4.2 (6级 level)	4.6 (8级 level)
5+12Ar+5+12A+5Low-E Double silver	1.1(W/m²k)	46 (5级 level)	600Pa	≤ 4.2 (6级 level)	4.6 (8级 level)

## PRODUCT PARAMETERS 产品参数

- Frame size:150/218mm
- Profile: 6063-T5 native aluminum material
- Thickness: frame:2.0mm/glass fan:8.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- 边框宽度 :150/218mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : frame:2.0mm/glass fan:8.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

## PRODUCT HARDWARE 产品五金



## OPENING METHOD 开启方式



Two Tracks  
And two Fans  
两轨两扇

Two Tracks  
And Four Fans  
两轨四扇

# 73 NON BROKEN BRIDGE FOLDING DOOR

73 非断桥折叠门 ▶▶



## PRODUCT PARAMETERS 产品参数

- Frame size: 73mm
- Profile: 6063-T5 native aluminum material
- Thickness: 2.0mm
- Color treatment: AksuT1010 powder (global 10-year warranty)
- Available colors: black, white, fluorocarbon gray, metallic coffee (custom color)
- Glass configuration: 5mm + 15A + 5mm
- 边框宽度: 73mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
- 玻璃配置: 5mm + 15A + 5mm


## PRODUCT HARDWARE 产品五金



## OPTIONAL LOWER TRACK 可选下轨



## OPENING METHOD 开启方式

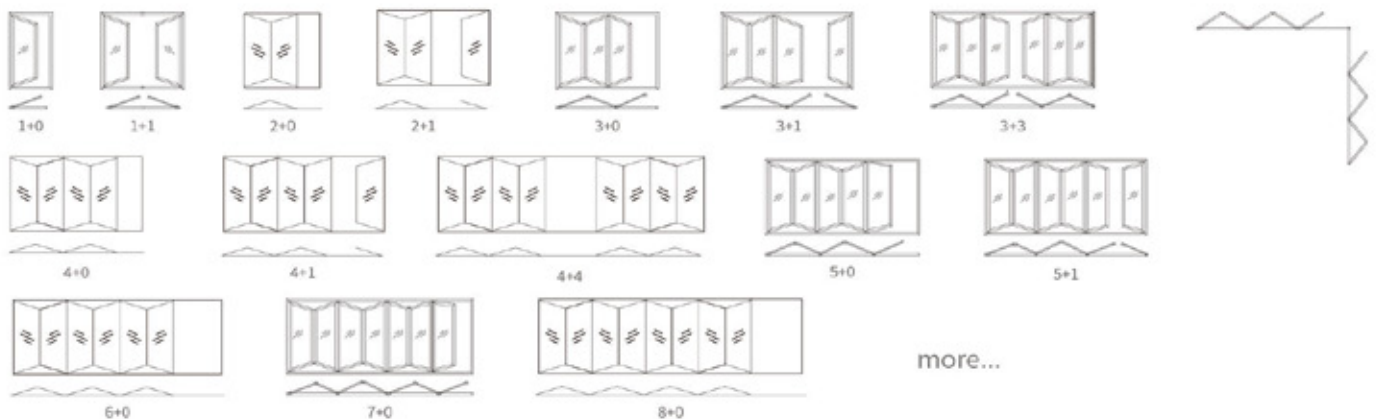

Extraordinary and dreamy aluminum alloy doors and window, adhering to a century old classic and focusing on quality each door and window is a combination of traditional handicrafts and modern craftsmanship, and every extraordinary supporter is writing a life chapter with nobility and elegance.

非凡梦幻的铝合金门窗，秉承百年经典注重品质，每一扇门窗都是传统工艺与现代工艺的结合，每一位非凡的支持者都在书写高贵典雅的人生篇章。



