
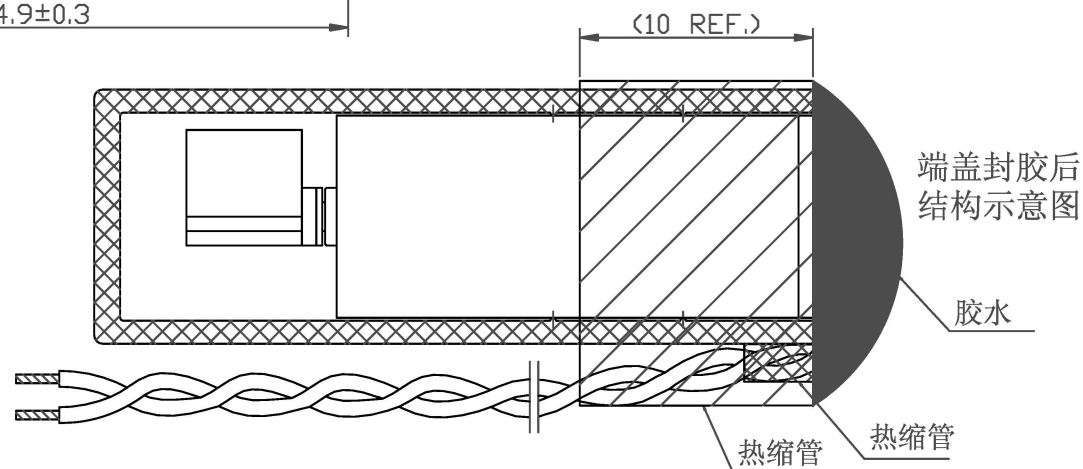
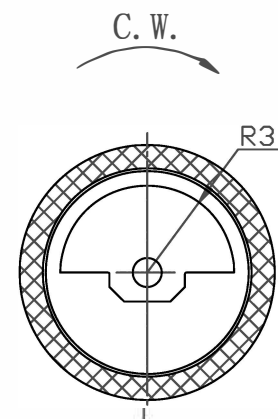


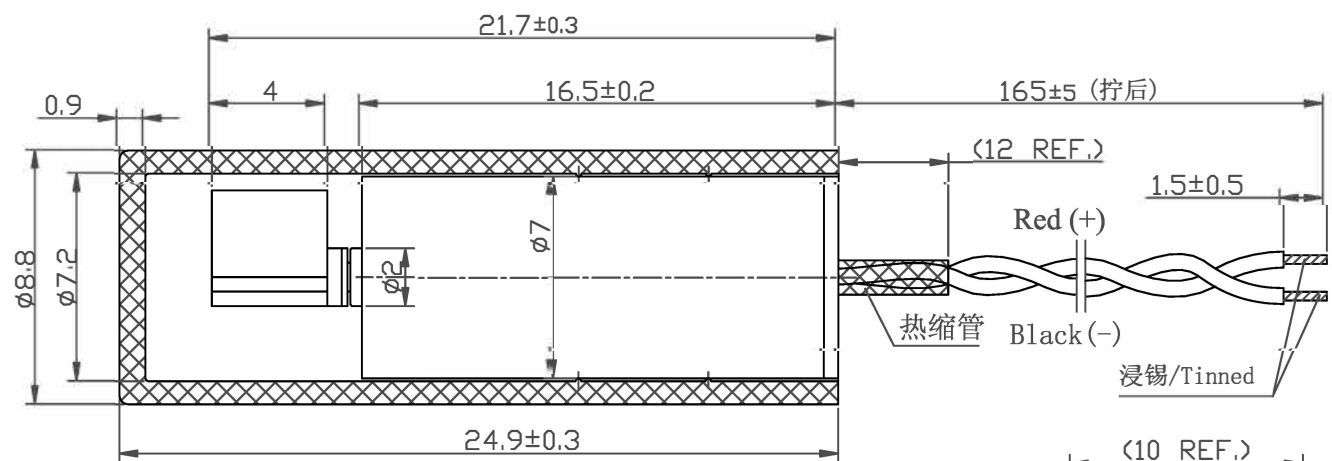

技术要求/Technical Requirements:

1. 额定电压/Rated voltage: 3.0V
2. 额定电流/Rated current: 50mA Max
3. 额定转速/Rated speed: 7,500 $\pm$ 2,000rpm
4. 堵转电流/Stall current: 130mA Max
5. 端子阻抗/Terminal resistance: 29 Ω ($\pm$ 20%)
6. 起动电压/Starting voltage: 1.7V Max
7. 轴向间隙/Shaft end play: 0.1~0.3mm
8. 导线规格/Lead wire spec: AWG30 UL3302
9. 所有尺寸为A向压紧后的尺寸(不包括轴向间隙/Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
10. 未注线性公差为/Unmarked tolerance: $\pm$ 0.1mm

标 记	处 数	分 区	更改文件号	签 名	日 期					外 形 图		
设 计			标准化			阶 段 标 记		重 量	比 例			
校 对												
审 核												
工 艺			批 准			共 页		第 页		JTZ7AL2B020208B		