
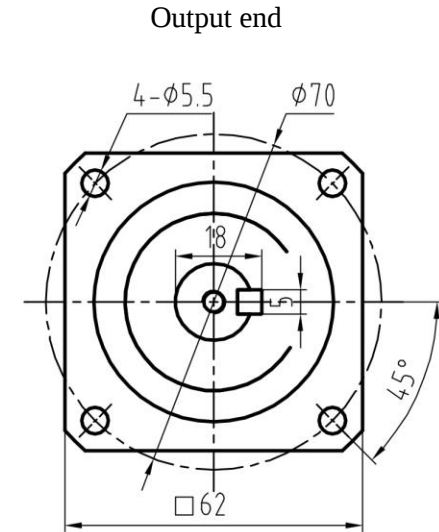
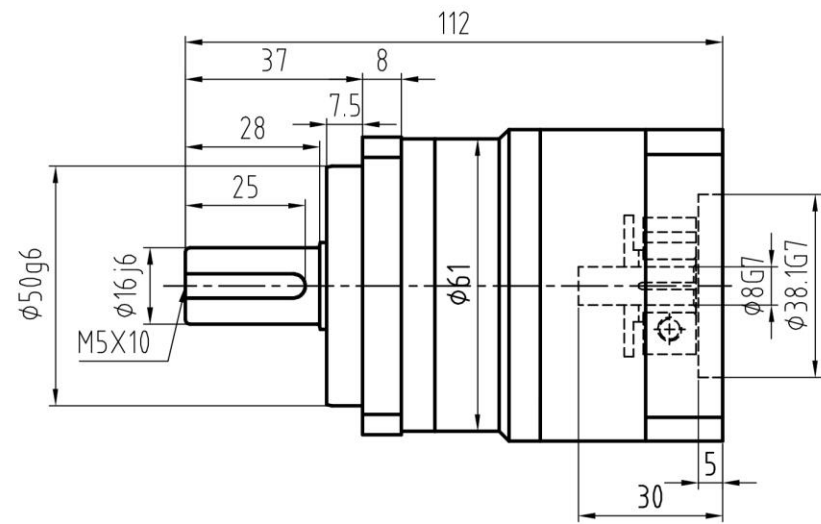


Customer name:

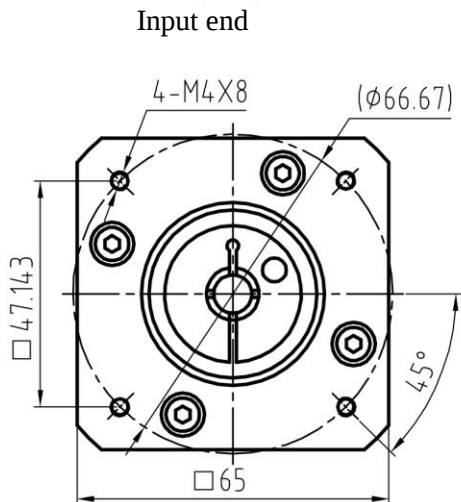


Select speed ratio	i=
Customer's signature	

Full load efficiency: 98%
Rated input speed: 3000min⁻¹
Lubrication method: Synthetic grease
lubrication (long-term lubrication)
Average service life: 20000h
Return clearance (precision): <3arcmin
Return clearance (economic type):<5arcmin

Working temperature: -25°~+90 °
Maximum input speed: 6000 min⁻¹
Installation method: At will

AF060-L1-[]-K[]-16-001-FT-8-A1
Matching motor size: φ8×25/φ38.1×3/4-φ4.5-φ47.14×47.14

Parameter	Transmission ratio	3	4	5	7	10	Design	Liu Jinghua				AF060 single-level dimensional drawing
Rated output torque Nm		35	45	44	40	22	Checked by					
Fault stop torque Nm		2-time rated output torque					Standardization		Drawing mark	Weight	Scale	AF060-[] 4S-S1
Moment of inertia Kgcm ²		0.22	0.17	0.16	0.14	0.14	Review		A017			
Permissible radial load N		920					Approval					
Permissible axial load N		630										