
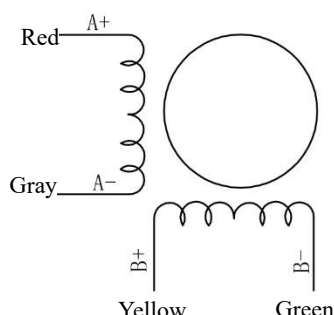


A

1		2		3		4
General technical parameters		Electrical technical parameters		Wiring Diagram		
Stepping angle	1.8°	Rated voltage	24V DC			
Number of phases	2	Rated current	0.6A			
Insulation resistance	100MΩMIN(500V DC)	Resistance	9±15%Ω			
Insulation level	Class B/winding	Inductance	3±20% mH			
Weight	About 80g	Holding torque	22mN.m			
Braking torque	4mN.m REF.	Moment of inertia	About 3g.cm²			

Overall dimension: unit=mm


B

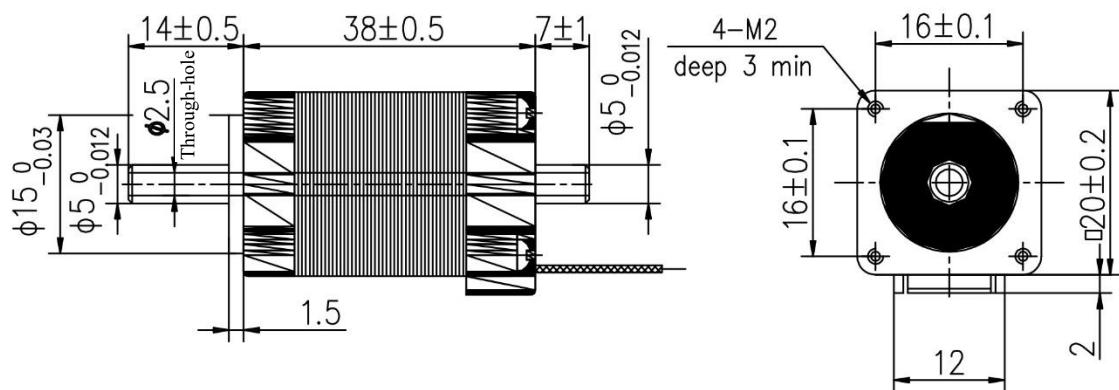


C

Note: The accuracy of $\phi 2.5$ through-hole is not guaranteed, and it is only used for ventilation.

D

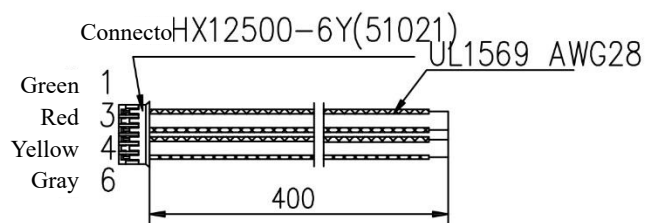

E

TOLERANCES (EXCEPT AS NOTES)		±0.3								
MATERIAL	----								Y07-20D1-1002-ZK2 5	
FINISH	----									
			SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE		
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION		THIRD ANGLI PROJECTION	
Dongguan Kaifull 20-07-27 Xu Yuanhao	Dongguan Kaifull 20-07-27 Xu Yuanhao					DWG.NO.	Y-20-0727-0			
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1		