



General technical parameters		Electrical technical parameters		Wiring Diagram
Stepping angle	1.8°	Rated voltage	24V DC	
Number of phases	2	Rated current	1A	
Insulation resistance	100MΩMIN(500V DC)	Resistance	2.2±15%Ω	
Insulation level	Class B/winding	Inductance	1.2±20% mH	
Weight	About 120g	Holding torque	60mN.m	
Step length	0.01MM	Moment of inertia	About 9g.cm ²	

Overall dimension: unit=mm

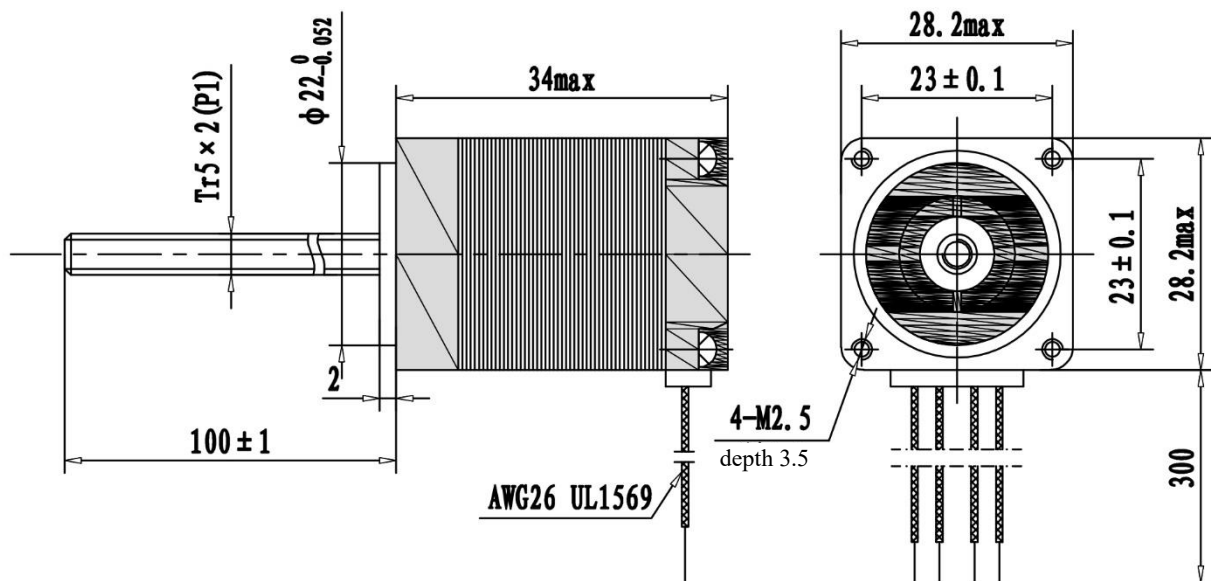

Nut material: Black POM

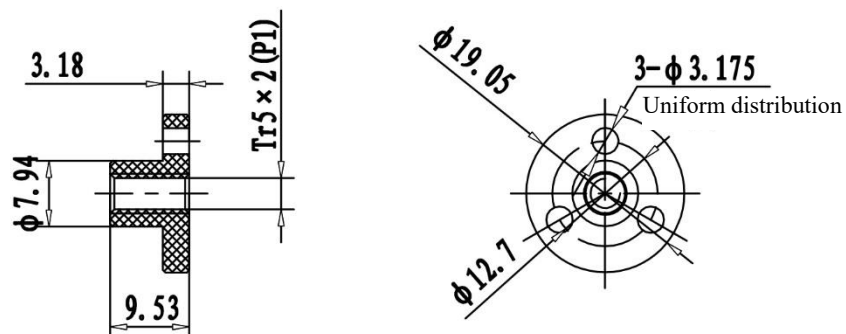

TOLERANCES (EXCEPT AS NOTES)	± 0.3
---------------------------------	-----------

MATERIAL	----							Y07-28D1-3411-02L C-100
FINISH	----							
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
Dongguan Kaifull 18-07-23 Xu Yuanhao	Dongguan Kaifull 18-07-23 Xu Yuanhao					DWG.NO.	Y-18-0724-0	
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1



1/1