



1		2		3	4
General technical parameters		Electrical technical parameters		Wiring Diagram	
Stepping angle	1.8°	Rated voltage	36V DC		
Number of phases	2	Rated current	4A		
Insulation resistance	100MΩMIN(500V DC)	Resistance	1.2±15%Ω		
Insulation level	Class B/winding	Inductance	12±20% mH		
Weight	About 2Kg	Holding torque	4N.m		
Step length	0.015MM	Moment of inertia	About 1400g.cm ²		

Overall dimension: unit=mm

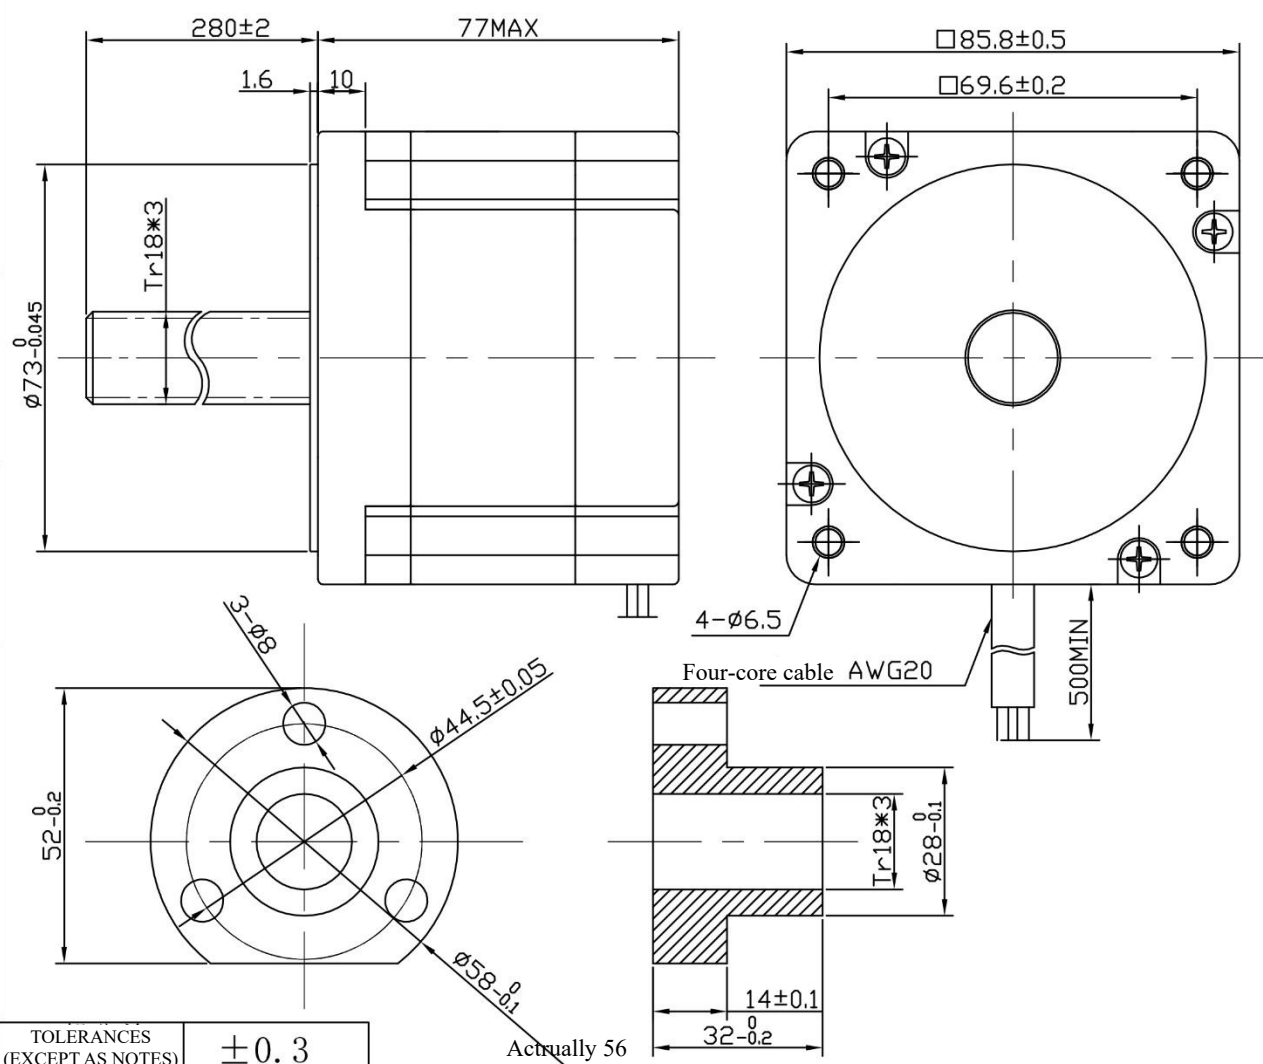

TOLERANCES (EXCEPT AS NOTES)	± 0.3
---------------------------------	-----------

MATERIAL	----							Y09-59D3-1401-03L C-280
FINISH	----							
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
Dongguan Kaifull 20-08-24 Xu Yuanhao	Dongguan Kaifull 20-08-24 Xu Yuanhao					DWG.NO.	Y-20-0824-0	
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1



1/1