



General technical parameters		Electrical technical parameters		Wiring Diagram
Stepping angle	1.8°	Rated voltage	24V DC	
Number of phases	2	Rated current	0.8A	
Insulation resistance	100MΩMIN(500V DC)	Resistance	4.8±15%Ω	
Insulation level	Class B/winding	Inductance	3.9±20% mH	
Weight	About 120g	Holding torque	60mN.m	
Braking torque	5mN.m REF.	Moment of inertia	About 9g.cm²	

Overall dimension: unit=mm

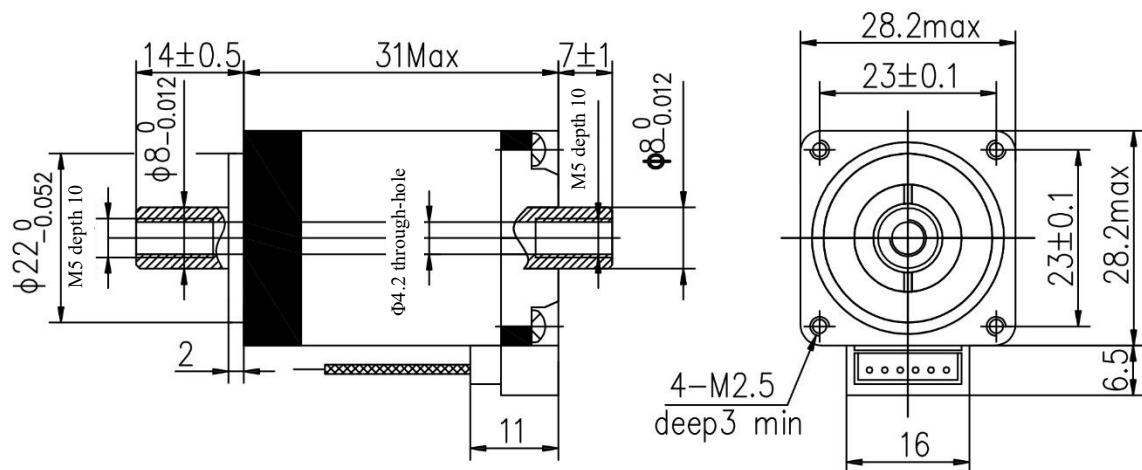

Note: 1. The accuracy of $\phi 4.2$ inner hole is not guaranteed, and it is only for ventilation.
2. M5 internal thread tolerance zone is 6H.

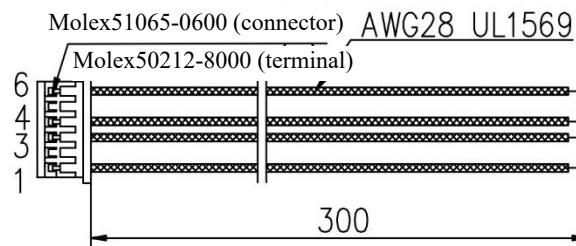

TOLERANCES (EXCEPT AS NOTES)		±0.3							
MATERIAL	----							Y07-28D1-2003-ZK5 2	
FINISH	----								
			SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION	
Dongguan Kaifull 19-07-23 Xu Yuanhao	Dongguan Kaifull 19-07-23 Xu Yuanhao					DWG.NO.	Y-19-0723-0		
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1	