

1



2

3

4

General technical parameters		Electrical technical parameters		Wiring Diagram 
Stepping angle	1.8°	Rated voltage	24V DC	
Number of phases	2	Rated current	1.0A	
Insulation resistance	100MΩMIN(500V DC)	Resistance	3.5±10%Ω	
Insulation level	Class B/winding	Inductance	2.3±20%mH	
Weight	About 200g	Holding torque	0.10N.m	
Braking torque	50gf.cm REF.	Moment of inertia	About 18g.cm²	

Overall dimension: unit=mm

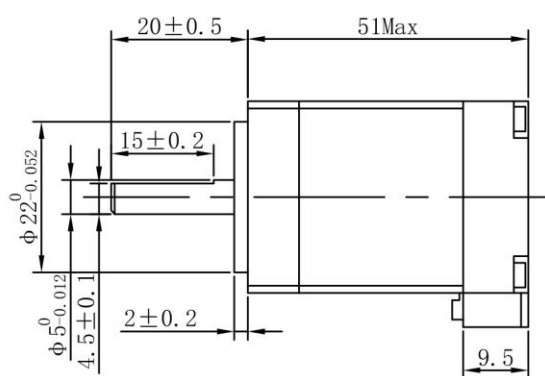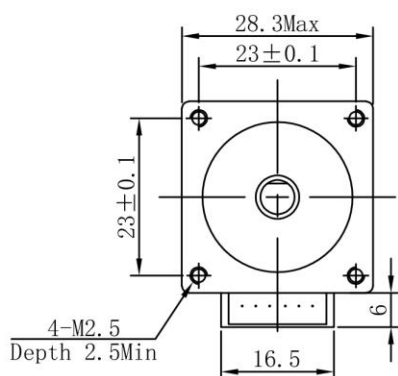

TOLERANCES (EXCEPT AS NOTES)		±0.3							
MATERIAL	----							Y07-28D1-5008	
FINISH	----								
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE		
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION		
Dongguan Kaifull 21-09-06 Xu Yuanhao	Dongguan Kaifull 21-09-06 Xu Yuanhao					DWG.NO.	Y-21-0908-0		
				Guangdong Kaifull Electronics Technology Co., Ltd.			SHEET	1/1	

A

B

U

D

三