




A	1		2		3		4	
	General technical parameters		Electrical technical parameters		Wiring Diagram			
	Stepping angle	1.8°	Rated voltage	24V DC				
	Number of phases	2	Rated current	1A				
	Insulation resistance	100MΩMIN(500V DC)	Resistance	3.5±15%Ω				
	Insulation level	Class B/winding	Inductance	2.7±20% mH				
	Weight	About 200g	Holding torque	140mN.m				
	Braking torque	35mN.m REF.	Moment of inertia	About 58g.cm²				

Overall dimension: unit=mm

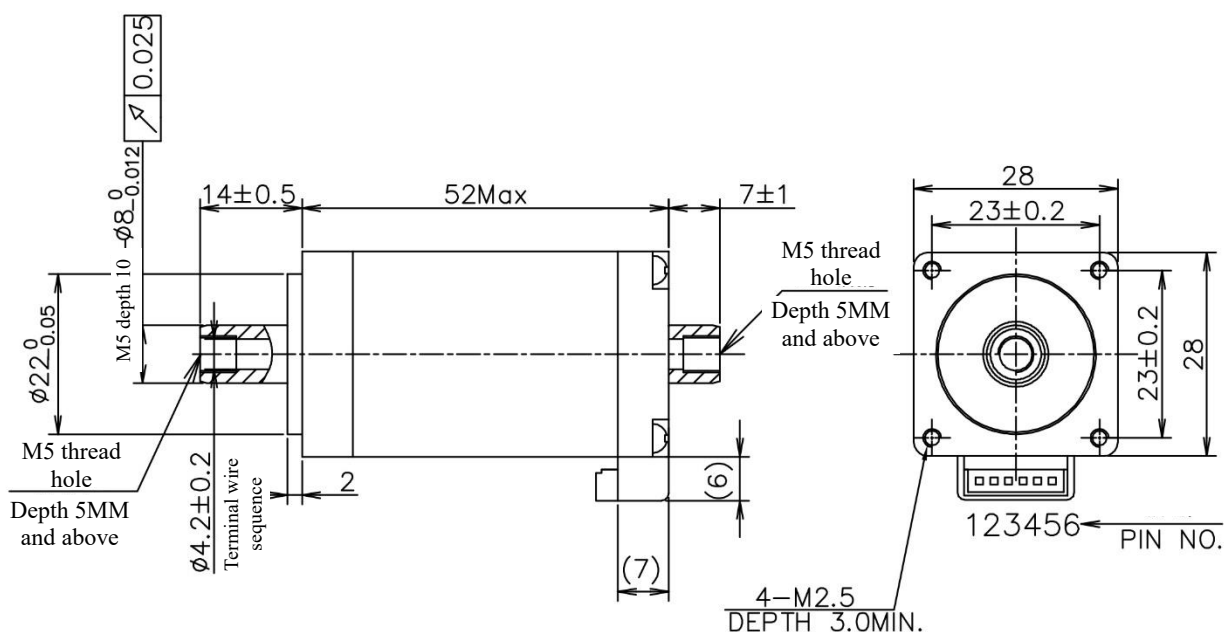

Molex51065-0600 (connector) AWG28 UL1569

√Molex50212-8000 (terminal)

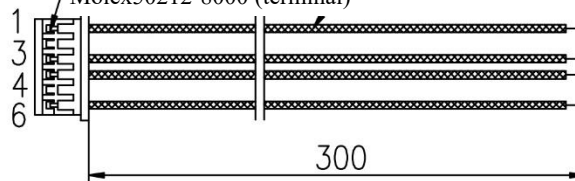

TOLERANCES (EXCEPT AS NOTES)	± 0.3
---------------------------------	-----------

MATERIAL	----						Y07-28D1-6003-ZK5 2	
FINISH	----							
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
Dongguan Kaifull 20-11-26 Xu Yuanhao	Dongguan Kaifull 20-11-26 Xu Yuanhao					DWG.NO.	Y-19-0526-0	
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1



1/1