



1		2		3		4	
General technical parameters		Electrical technical parameters		Wiring Diagram			
Stepping angle	1.8°	Rated voltage	24V DC				
Number of phases	2	Rated current	1.3A				
Insulation resistance	100MΩMIN(500V DC)	Resistance	2.9±15%Ω				
Insulation level	Class B/winding	Inductance	5.2±20% mH				
Weight	About 280g	Holding torque	380mN.m				
Braking torque	20nN.m REF.	Moment of inertia	About 58g.cm ²				

Overall dimension: unit=mm

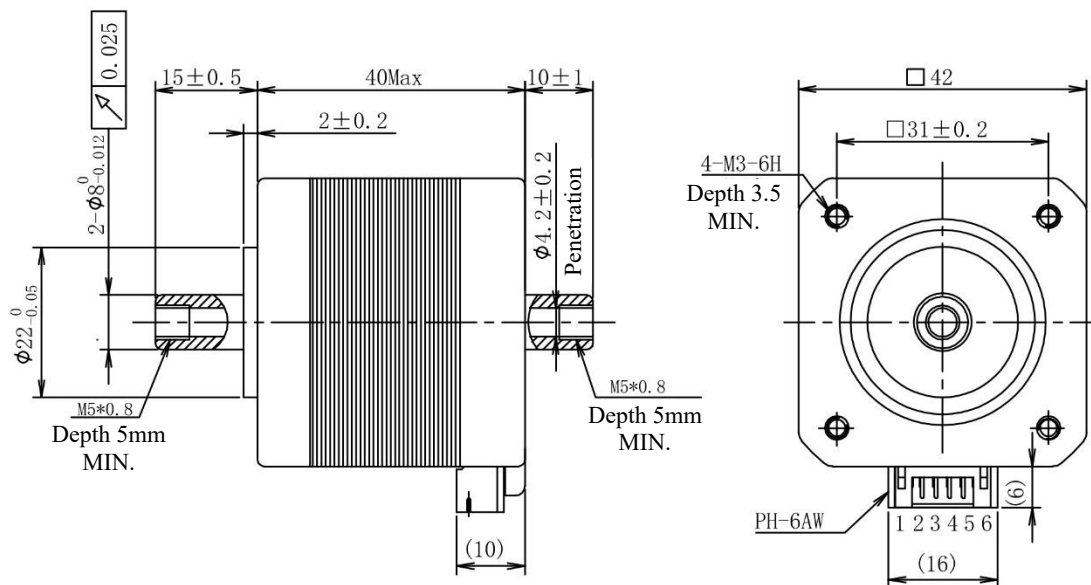

TOLERANCES (EXCEPT AS NOTES)	± 0.3
---------------------------------	-----------

MATERIAL	----							Y07-43D1-4002-ZK5 2
FINISH	----							
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
Dongguan Kaifull 20-11-27 Xu Yuanhao	Dongguan Kaifull 20-11-27 Xu Yuanhao					DWG.NO.	Y-18-1022-0	
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1



1/1