


A

B


C

D

E

General technical parameters		Electrical technical parameters		Wiring Diagram 
Stepping angle	1.8°	Rated voltage	24V DC	
Number of phases	2	Rated current	2.0A	
Insulation resistance	100MΩMIN(500V DC)	Resistance	1.82±15%Ω	
Insulation level	Class B/winding	Inductance	4.24±20% mH	
Weight	About 600g	Holding torque	0.77N.m	
Braking torque	300gf.cm REF.	Moment of inertia	About 110g.cm²	

Overall dimension: unit=mm

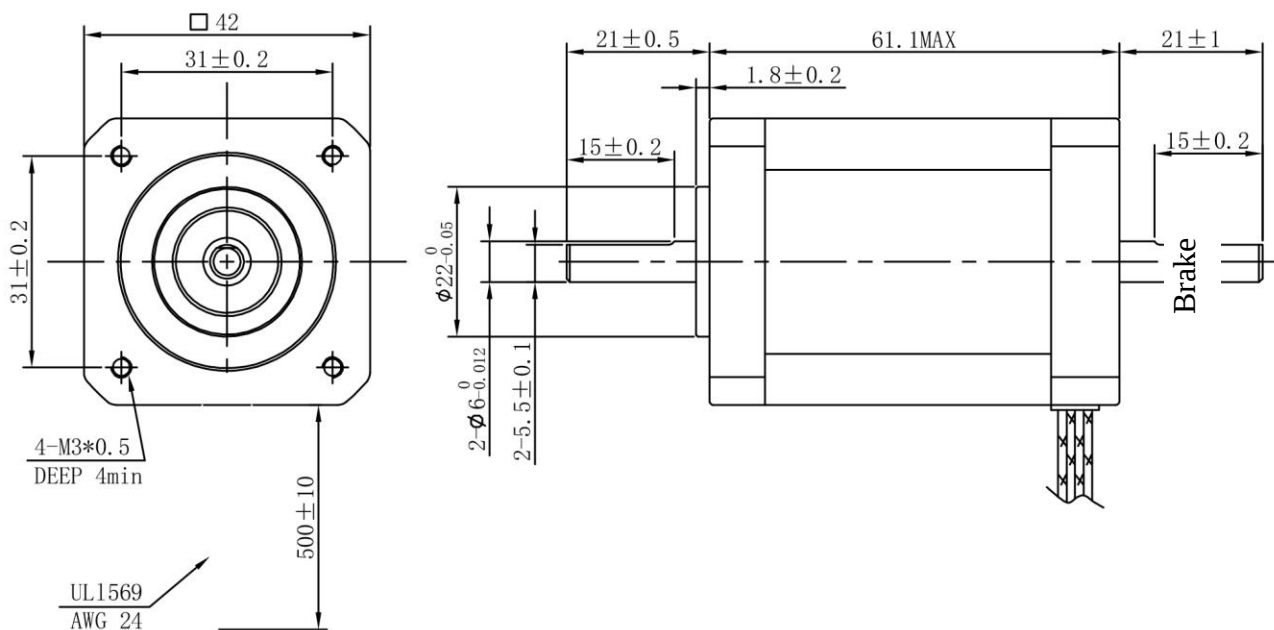

TOLERANCES (EXCEPT AS NOTES)		±0.3							
MATERIAL	----							Y07-43D4-5040D	
FINISH	----								
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE		
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION	
Dongguan Kaifull 19-01-18 Xu Yuanhao	Dongguan Kaifull 19-01-18 Xu Yuanhao					DWG.NO.	Y-19-0118-0		
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1	