
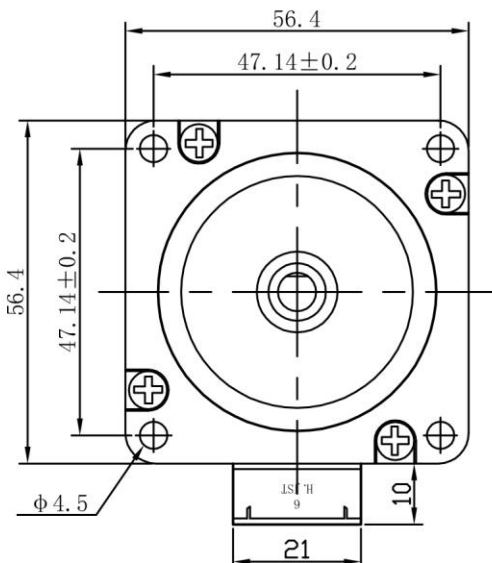
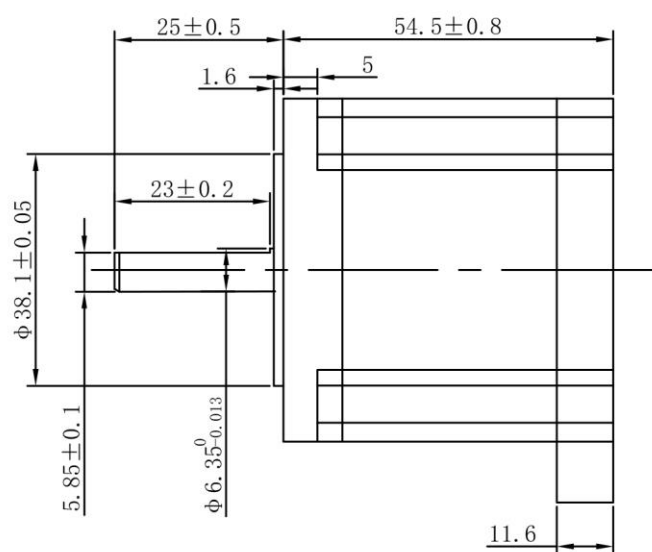
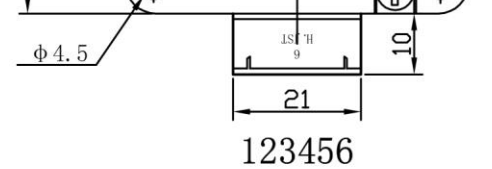


A	1		2		3		4		
	General technical parameters		Electrical technical parameters		Wiring Diagram				
	Stepping angle	1.8°	Rated voltage	24V DC					
	Number of phases	2	Rated current	4.2A					
	Insulation resistance	100MΩMIN(500V DC)	Resistance	0.41±15%Ω					
	Insulation level	Class B/winding	Inductance	1.3±20% μ H					
	Weight	About 710g	Holding torque	1.4N.m					
Braking torque	600gf.cm REF.	Moment of inertia	About 245g.cm²						
Overall dimension: unit=mm									
B									
	123456								
C									
D	TOLERANCES (EXCEPT AS NOTES)		±0.3						
	MATERIAL	----						Y07-59D1-3074	
	FINISH	----							
			SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
	DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
E	Dongguan Kaifull	Dongguan Kaifull					DWG.NO.	Y-18-0914-0	
	18-09-14	18-09-14			Guangdong Kaifull Electronics Technology Co., Ltd.		SHEET	1/1	
Xu Yuanhao		Xu Yuanhao							