

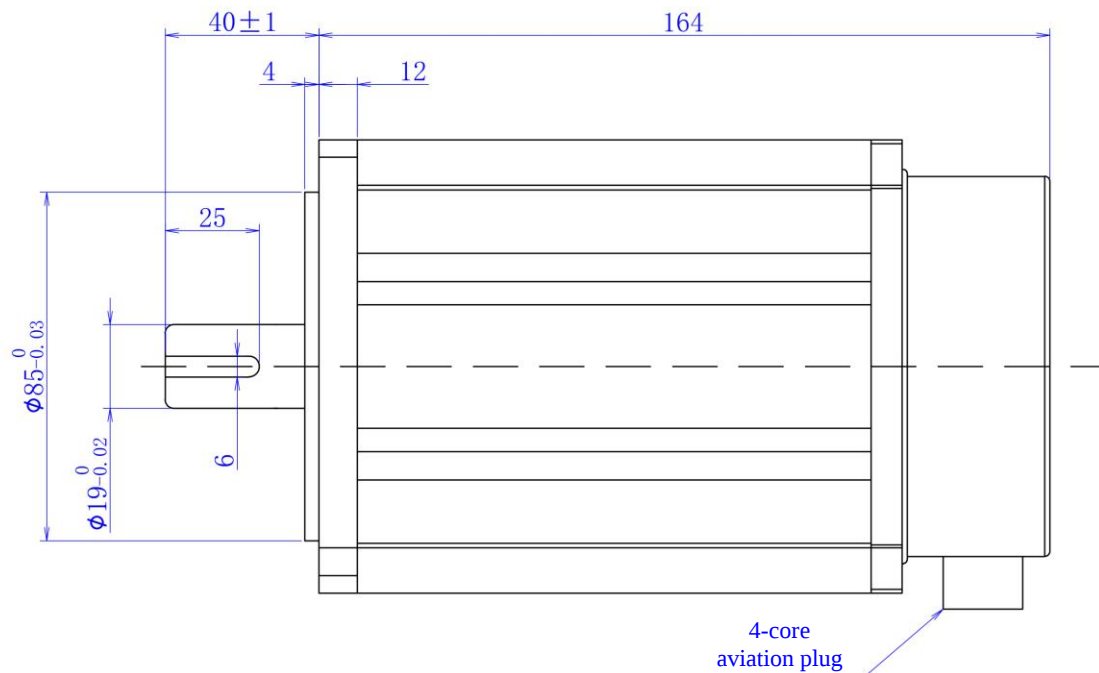


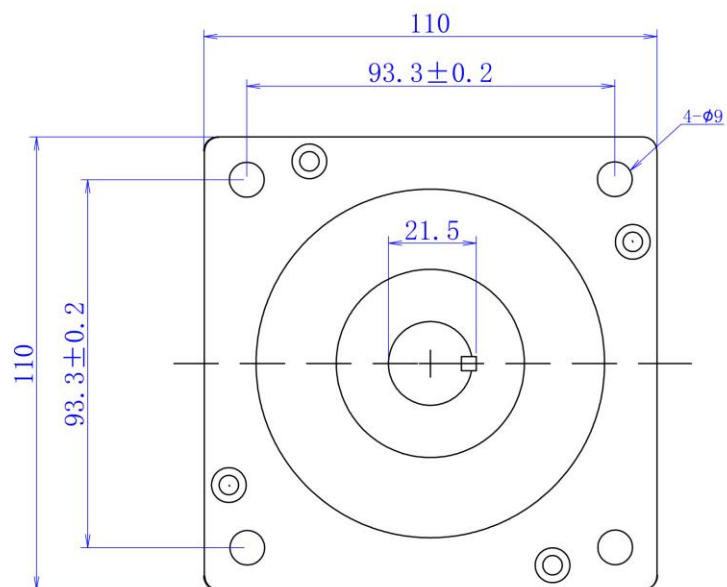

General parameters & standard parameters

Step angle	1.8°
Number of phases	2
Insulation resistance	100MΩmin.(1500V AC)
Insulation level	Class B
Moment of inertia	11.9Kg.cm ²
Weight	7.1kg
AC drive voltage	220V
Rated current	5.0A
Phase resistance	0.76Ω±10%
Phase inductance	11.5mH±20%
Holding torque	13N.m
--	--

Wiring Diagram



MATERIAL	---								
FINISH	---	--	20-12-14	---	00 First version	Xu Yuanhao			Y09-110D5-1113
		SYM	DATE	REVISION NO.	REVISIONS	BY			NOTE
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLE PROJECTION	
Dongguan Kaifull 20-12-14 Xu Yuanhao	Dongguan Kaifull 20-12-14 Xu Yuanhao					DWG.NO.	Y-20-1214-0		
DONGGUANG KAIFULL CO.,LTD.							SHEET	1/1	