

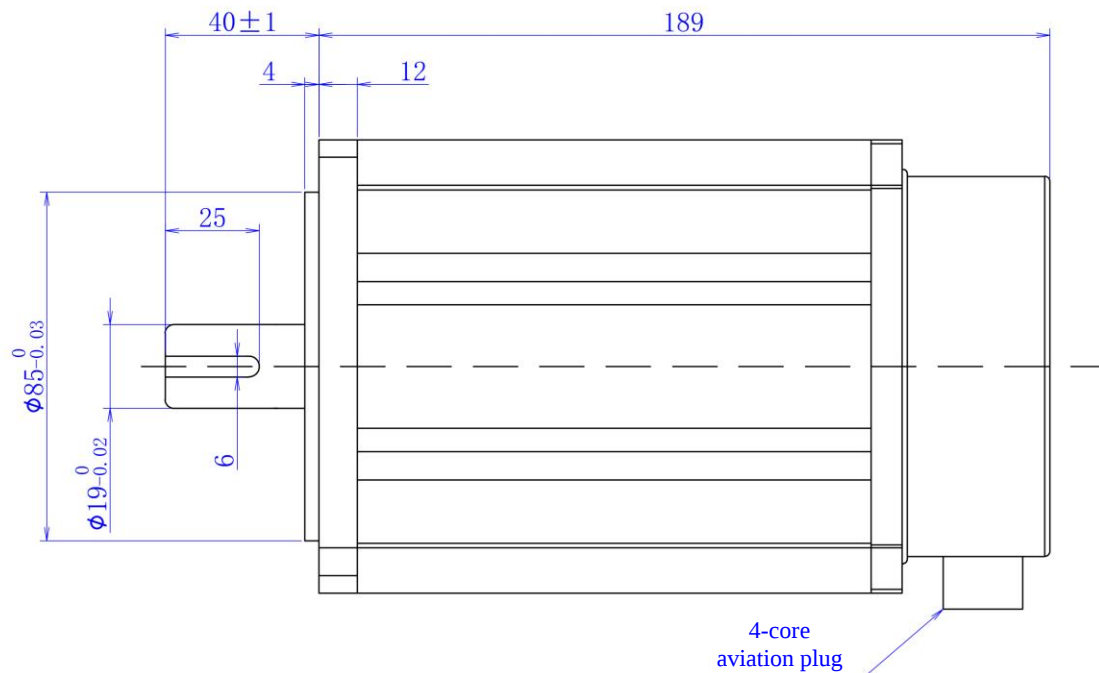


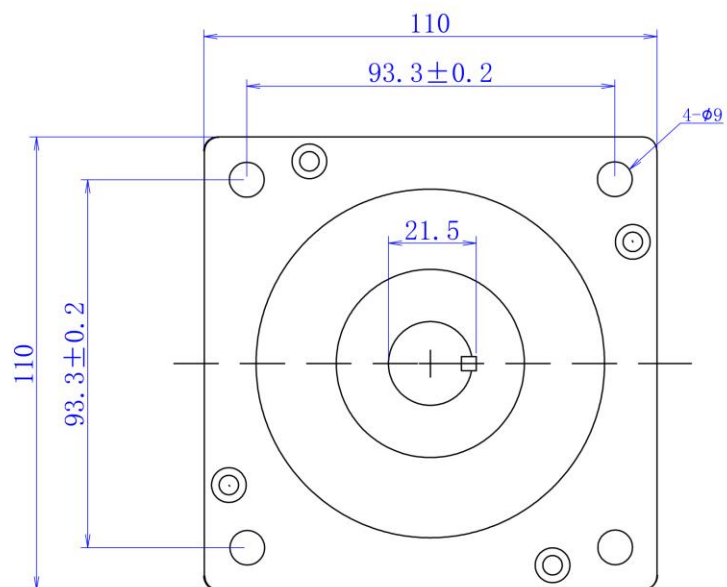

General parameters & standard parameters

Step angle	1.2°
Number of phases	3
Insulation resistance	100MΩmin.(1500V AC)
Insulation level	Class B
Moment of inertia	14.8Kg.cm ²
Weight	8.8kg
AC drive voltage	220V
Rated current	6.0A
Phase resistance	1.28Ω±10%
Phase inductance	19mH±20%
Holding torque	19N.m
--	--

Wiring Diagram



MATERIAL	---								
FINISH	---	--	20-12-14	---	00 First version	Xu Yuanhao			Y09-110D5-1119
		SYM	DATE	REVISION NO.	REVISIONS	BY			NOTE
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLE PROJECTION	
Dongguan Kaifull 20-12-14 Xu Yuanhao	Dongguan Kaifull 20-12-14 Xu Yuanhao					DWG.NO.	Y-20-1214-0		
DONGGUANG KAIFULL CO.,LTD.							SHEET	1/1	