



1		2		3	4
General technical parameters		Electrical technical parameters		Wiring Diagram 	
Stepping angle	1.8°	Rated voltage	24V DC		
Number of phases	2	Rated current	6.3A		
Insulation resistance	100MΩMIN(500V DC)	Resistance	0.24±15%Ω		
Insulation level	Class B/winding	Inductance	1.7±20% mH		
Weight	About 1600g	Holding torque	2.9N.m		
Braking torque	1500gf.cm REF.	Moment of inertia	About 1100g.cm ²		

Overall dimension: unit=mm



TOLERANCES (EXCEPT AS NOTES)		±0.3		Ø12.7									
MATERIAL	----									Y09-59D3-7430			
FINISH	----									NOTE			
			SYM	DATE	REVISION NO.	REVISIONS	BY						
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION			THIRD ANGLI PROJECTION			
Dongguan Kaifull 19-01-10 Xu Yuanhao	Dongguan Kaifull 19-01-10 Xu Yuanhao					DWG.NO.	Y-19-0110-0						
				Guangdong Kaifull Electronics Technology Co., Ltd.					SHEET		1/1		

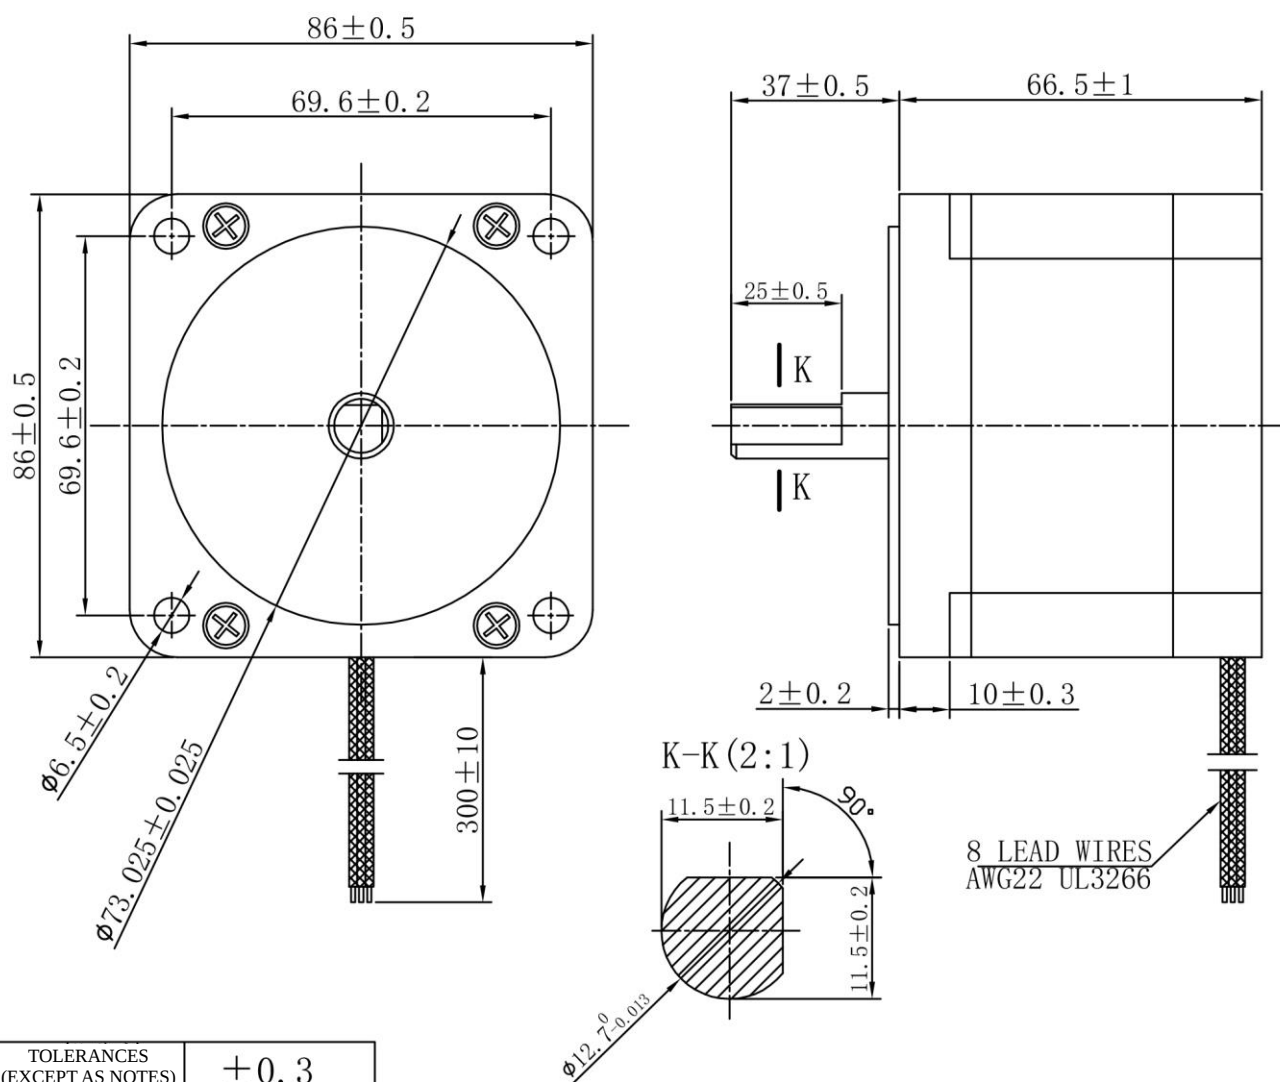