

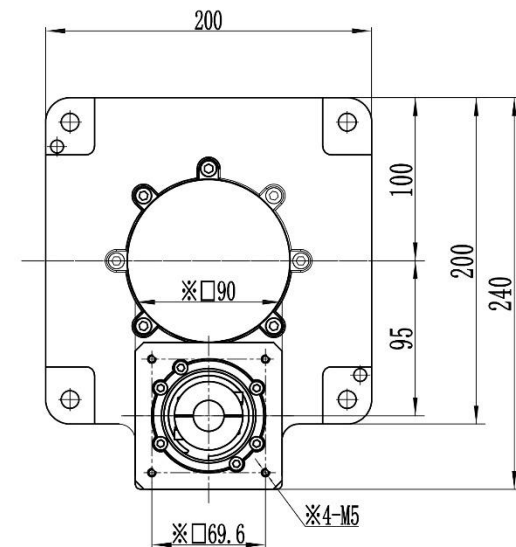
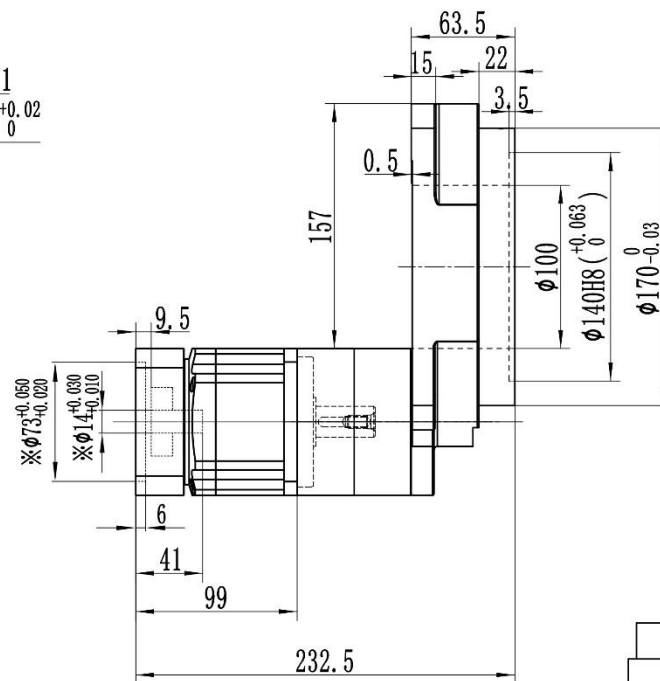


Version

A

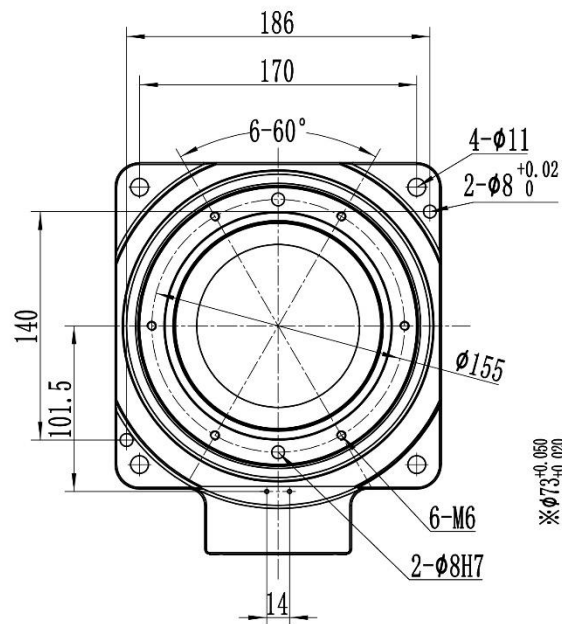

Ratio:30(10+3)

Rated output torque: 70Nm

Rated output speed: 200rpm

Allowable axial load :4000N

Positioning precision: ≤3arcmin

Reset positioning precision:±15arc. sec

Parallelism:≤0.04mm

Concentricity:≤0.015mm

Noise :≤67dB

Protection Level :IP40

Please sign (seal) and send back

		Hollow rotating platform			 KAIFULL TECHNOLOGY
		Angle of view			
		Stage mark	Weight	Scale	YKW200K-30T1
				1:2.8	
Non-standard information bar		Page of			

*Continuous service life: 10000h