



Encoder wiring table:

Blue	A-
Black	A+
Gray	B-
Purple	B+
Orange	Z-
Brown	Z+
White	GND
Red	VCC+5V

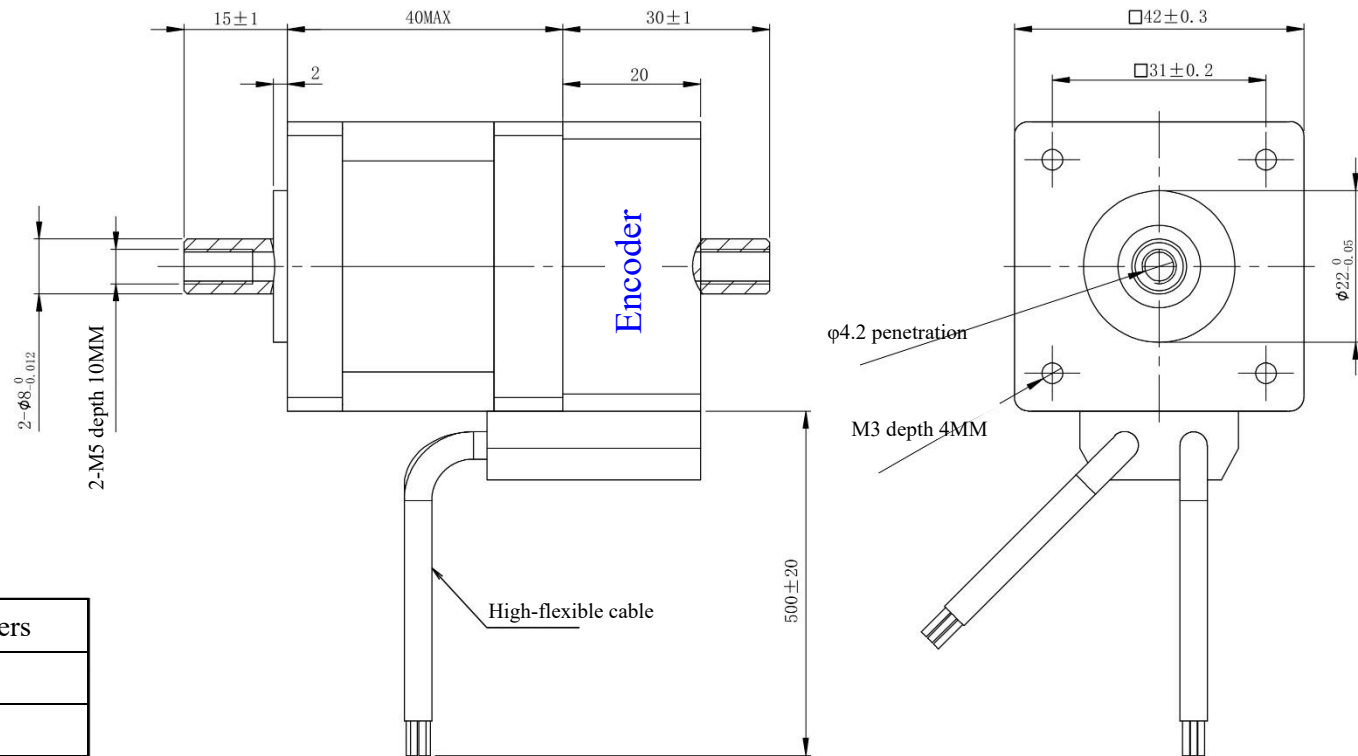

General parameters & standard parameters	
Step angle	1.8°
Number of phases	2
Insulation resistance	100MΩmin. (500V DC)
Insulation level	Class B
Moment of inertia	430g.cm ²
Weight	0.37kg
Drive motor	24V
Rated current	1.5A
Phase resistance	2.1Ω±10%
Phase inductance	4.8mH±20%
Holding torque	400mN.m
Position torque	5mN.m

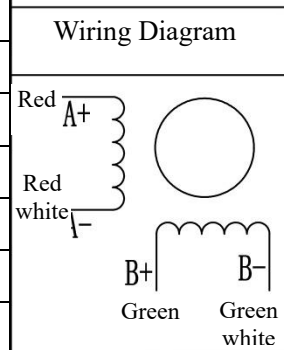

MATERIAL	----	2					Y07-43D40-0002-E1000	
		1						
FINISH	----	0	21-06-29	----		00 First version	Xu Yuanhao	
		SYM	DATE	REVISION NO.		REVISIONS	BY	NOTE
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLE PROJECTION
Dongguan Kaifull 21-06-29 Xu Yuanhao	Dongguan Kaifull 21-06-29 Xu Yuanhao					DWG.NO.	Y-21-0629-0	
DONGGUAN KAIFULL CO.,LTD.						SHEET		1/1