
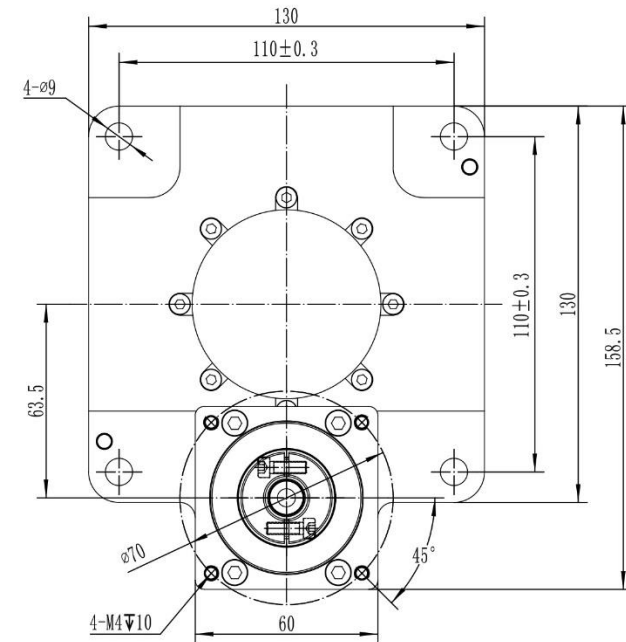
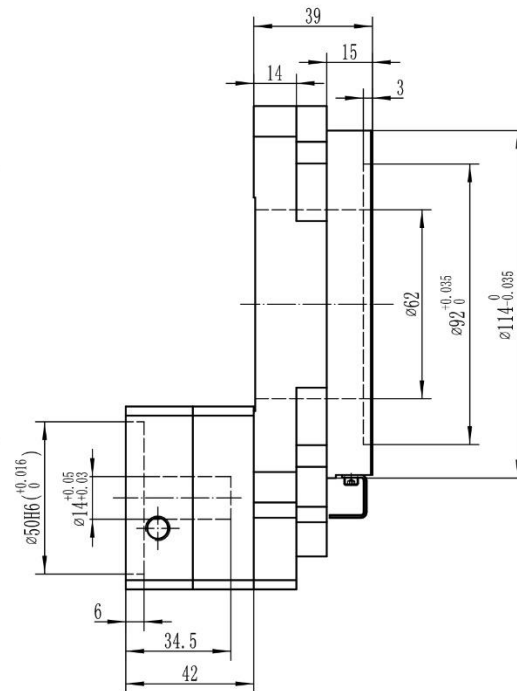


Version

A

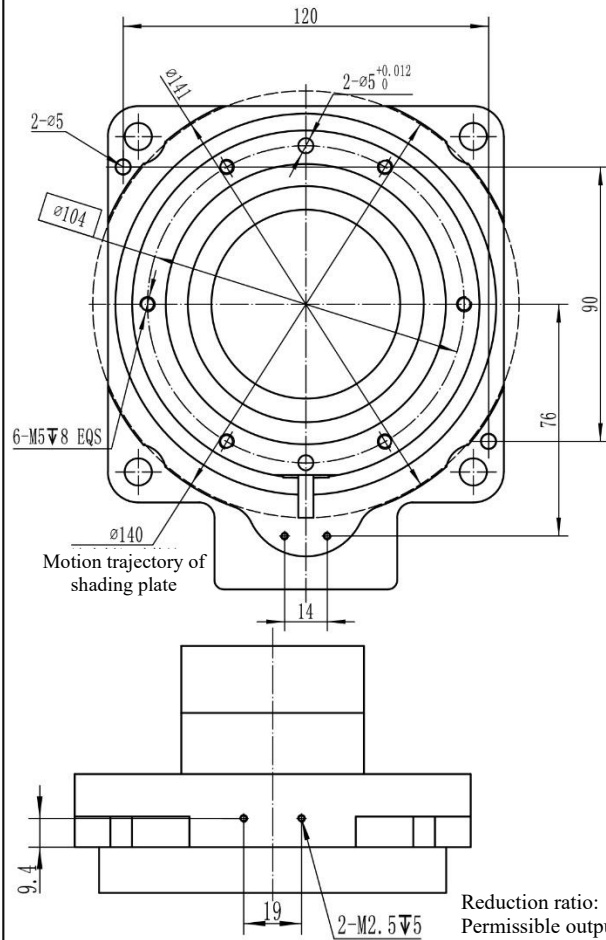

Reduction ratio: 10  
Permissible output torque: 20N.m  
Permissible output speed:  
200RPM  
Permissible thrust load: 250kgf  
Repetitive positioning accuracy:  
±15arc.sec  
Platform end face runout: 0.01mm

|                              |                   |                          |        |       |                                                    |
|------------------------------|-------------------|--------------------------|--------|-------|----------------------------------------------------|
|                              | Rework            | Hollow rotating platform |        |       | Please sign (seal) and send back                   |
|                              | Rework            |                          |        |       | Guangdong Kaifull Electronics Technology Co., Ltd. |
|                              | Rework            | Angle of view            |        |       | YKW130K-10T2                                       |
|                              | Rework            | Stage mark               | Weight | Scale | 10280014                                           |
|                              |                   |                          |        |       |                                                    |
| Material name                | Processing method |                          |        | 1:1.5 |                                                    |
| Non-standard information bar |                   | Page of                  |        |       |                                                    |

\*Continuous service life: 10000h