
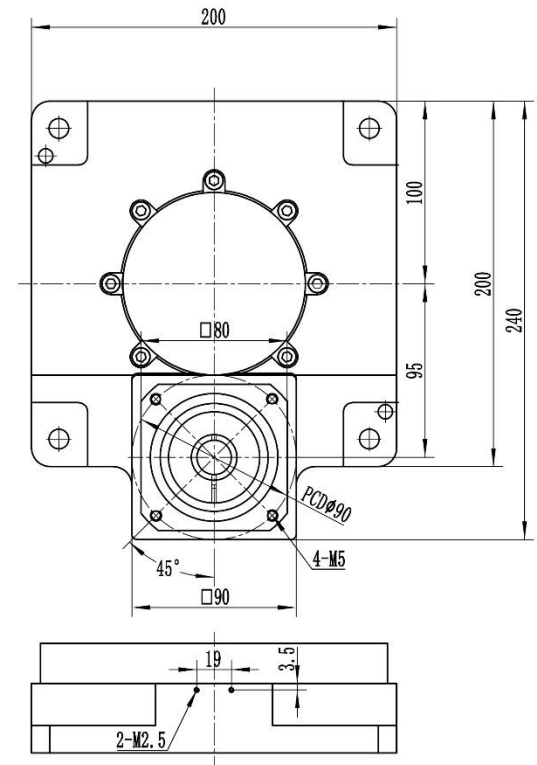
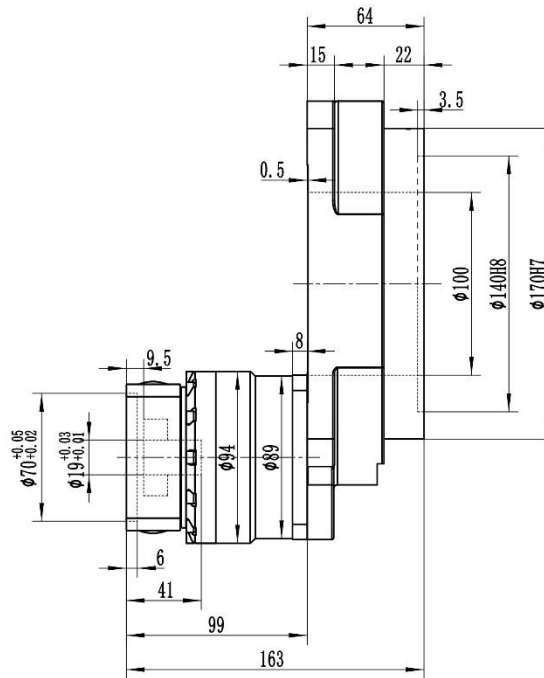


Version

A

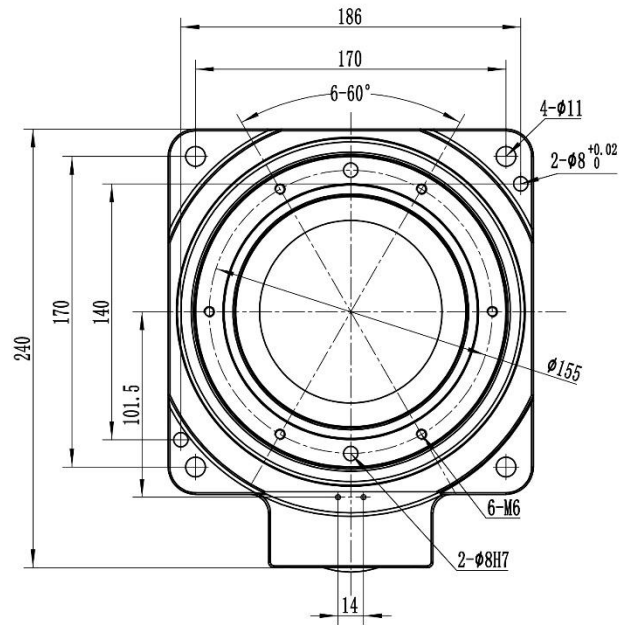

Ratio: 30 (10+3)

Rated Output Torque: 70Nm

Emergency stop Torque: 70Nm×2

Rated Output Speed: 200RPM

Maximum Bending Moment: 100Nm

Allowable Axle Force: 4000N

Backlash: $P2 \leq 3 \text{ arcmin}$ Reset positioning precision: $\pm 15 \text{ arcmin}$ Noise: $\leq 67 \text{ dB}$

Service Life: 20000h

Protection class: IP64

Operating temperature: $-10 \sim 90^\circ\text{C}$

Standard lubrication: Grease

Please sign (seal) and send back

		Hollow rotating platform			 KAIFULL TECHNOLOGY
		Angle of view			
		Stage mark	Weight	Scale	YKW200P-30V1
				1:2.5	
Non-standard information bar		Page of			

*Continuous service life: 10000h