


Version

A



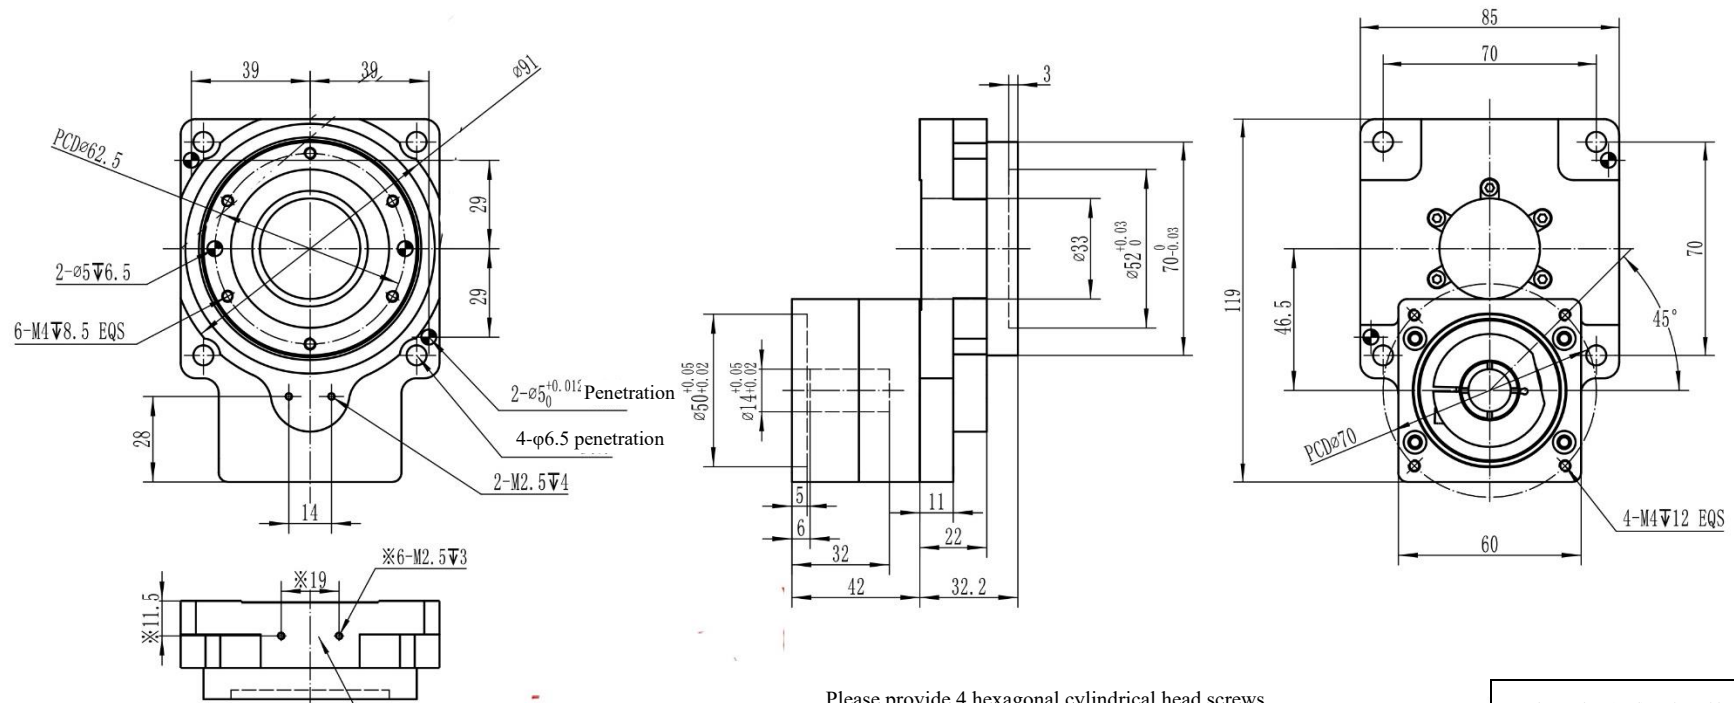

Reduction ratio: 5
Permissible output torque: 12N.m
Permissible output speed: 200RPM
Permissible axial load: 500N
Repetitive positioning accuracy:
 $\pm 15 \text{ arc. sec}$
Platform end face runout: 0.01mm
Protection level: IP40

Notes:
The installation screws of the side induction switch must be M2.5*5 screws or M2.5*6 screws+flat washers. Otherwise, there may be a risk of not locking tightly or damaging the reducer gear!

Please provide 4 hexagonal cylindrical head screws
GB/70.1-M2.5 * 5mm-level 12.9 - blackened -
(30010329) for the shipping accessory package

Please sign (seal) and send back

	Rework	Hollow rotating platform				Guangdong Kaifull Electronics Technology Co., Ltd.
	Rework					
	Rework	Angle of view			YKW85K-10T2	
	Rework	Stage mark	Weight	Scale		
		<div></div>	<div></div>	<div></div>	1:1.5	10280209
Material name	Processing method					
Non-standard information bar		Page of				

*Continuous service life: 10000h