


Version

A

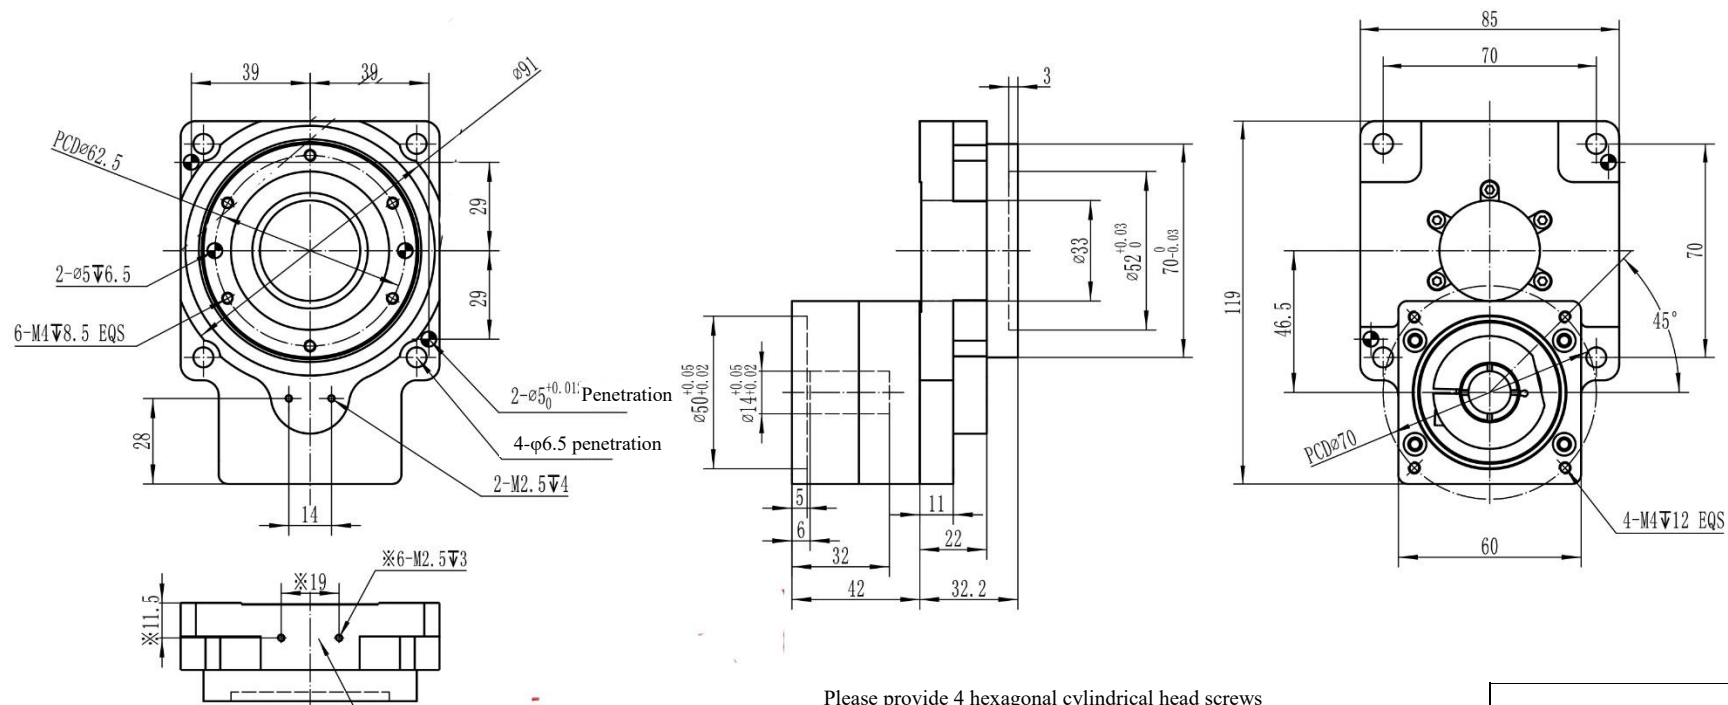


Notes:

The installation screws of the side induction switch must be M2.5*5 screws or M2.5*6 screws+flat washers. Otherwise, there may be a risk of not locking tightly or damaging the reducer gear!

Reduction ratio: 5
Permissible output torque: 12N.m
Permissible output speed: 200RPM
Permissible axial load: 500N
Repetitive positioning accuracy:
±15arc.sec
Platform end face runout: 0.01mm
Protection level: IP40

Please provide 4 hexagonal cylindrical head screws
GB/70.1-M2.5 * 5mm-level 12.9 - blackened -
(30010329) for the shipping accessory package

Please sign (seal) and send back

	Rework	Hollow rotating platform				Guangdong Kaifull Electronics Technology Co., Ltd.	
	Rework						
	Rework	Angle of view			YKW86K-5V1		
	Rework	Stage mark	Weight	Scale			
		<div><div></div><div></div><div></div><div></div><div></div></div>			10280209		
Material name	Processing method						
Non-standard information bar		Page of					

*Continuous service life: 10000h