


励磁顺序VS. 旋转方向

				STEP	A	B	C	D
4	+	-	-	1	+			
3	-	-	+	2	+	+	-	-
2	-	+	+	3	-	-		
1	+	+	-	4				


从安装面看为顺时针方向

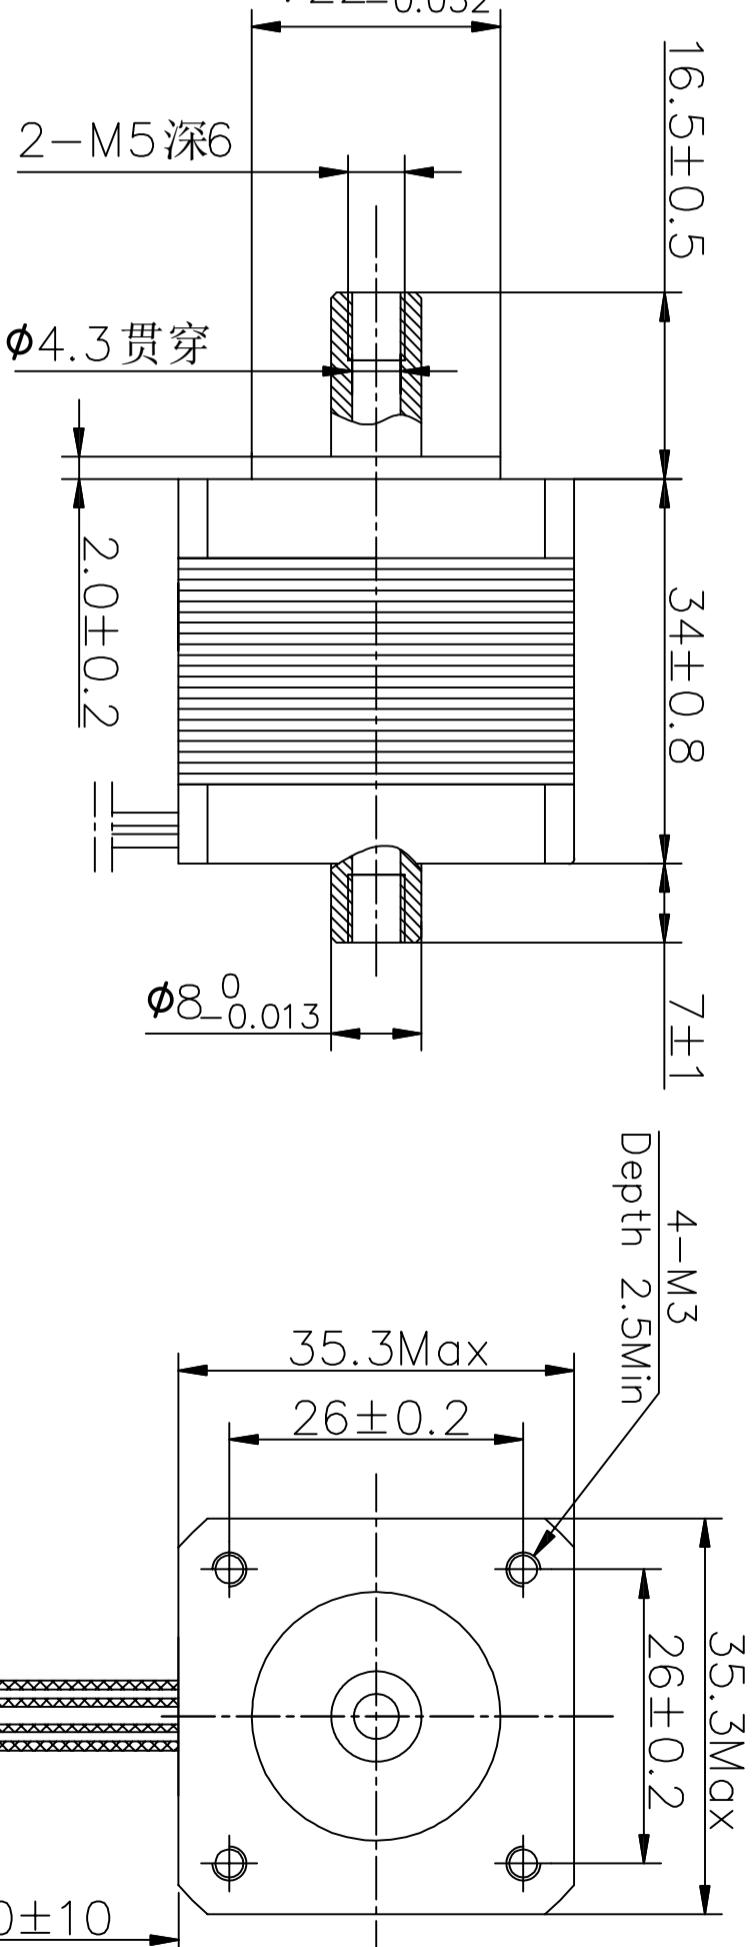

通用参数&标准参数

通用参数&标准参数	
步距角	1.8°
相数	2
绝缘电阻	100MΩ min. (500V DC)
绝缘等级	Class B
转动惯量	18g·cm ²
重量	0.29kg
驱动电压	24V
额定电流	1.0A
相电阻	3.1 Ω ±10%
相电感	3.3mH±20%
保持转矩	150mN.m
定位转矩	4mN.m

接线图

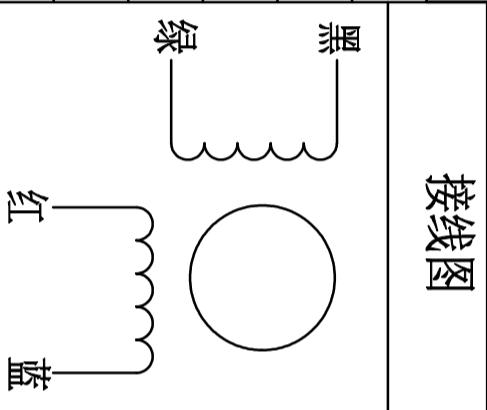

材 质 MATERIAL	—	2	—	—	—	—	—	Y07-35D34-4402-ZK52
表面处理 FINISH	—	1	—	—	—	—	—	—
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比例 SCALE	品 名 TITLE	变 更 事 项 REVISIONS	设计 BY	电 机 规 格 书 MOTOR SPECIFICATION
凯福科技 , 21-12-24	凯福科技 , 21-12-24	—	SM 年 月 日 DATE	变更票号 REVISION NO.	—	00初版	许元好	—
许元好 (圆)	许元好 (圆)	—	—	—	—	—	—	—
广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.				图 号 DWG. NO.	Y-21-1224-0	页 数 SHEET	1/1	—

