
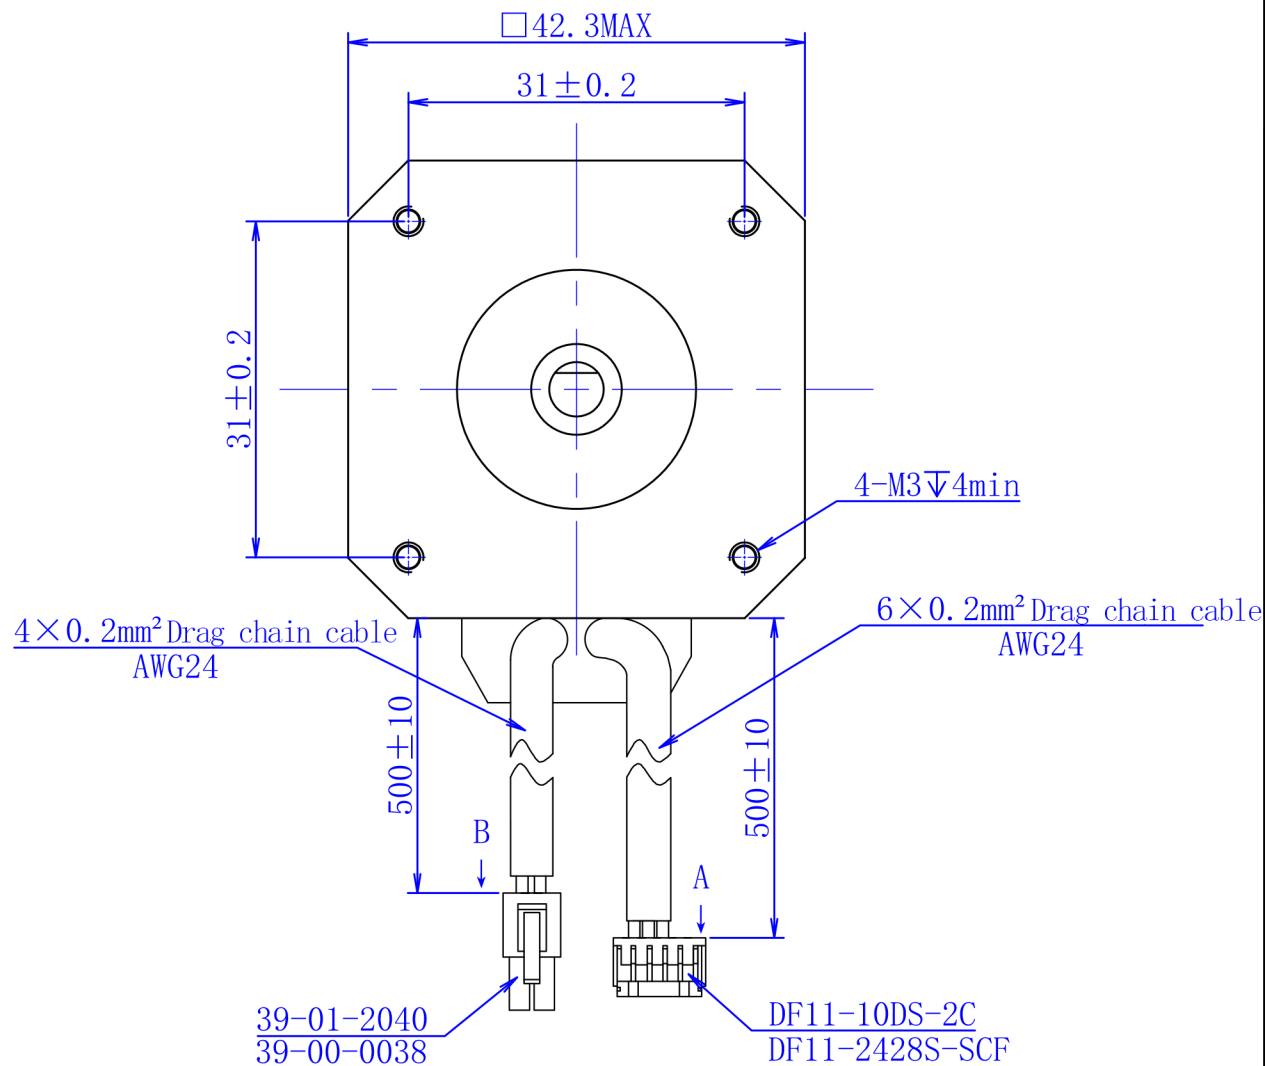


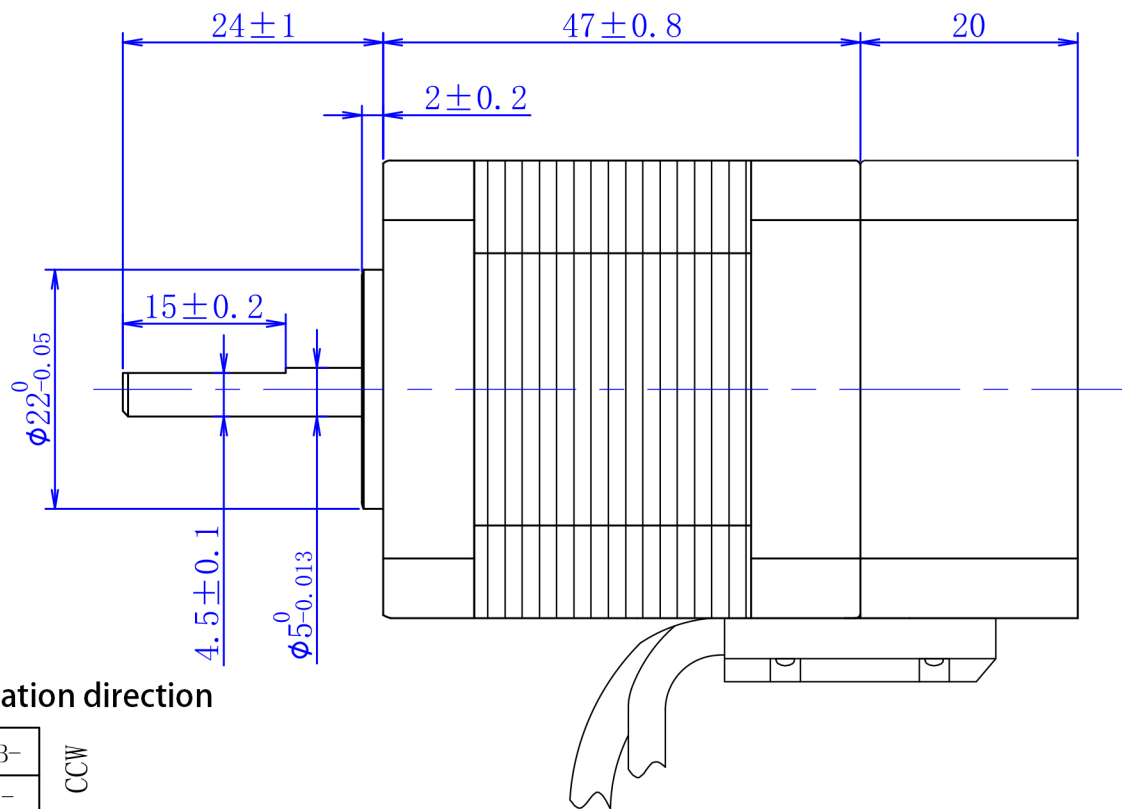

Excitation sequence VS. rotation direction

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

From the exit end,
rotate CW clockwise

Data outlet definition


1000 wire

red	black	orange
PB+	PA+	+5V
blue	green	yellow
PB-	PA-	GND


Universal parameter

Step Angle	1.8°
Phase number	2
Insulation resistance	100MΩ min.
Insulation class	Class B
Moment of inertia	82g.cm ²
weight	0.3kg
Driving voltage	24V
Rated current	2.0A
Phase resistance	1.7Ω±10%
Phase inductance	2.6mH±20%
Holding torque	0.48N.m
Insulation withstand voltage	500V DC


Wiring diagram

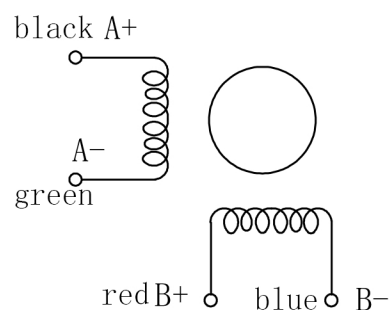

A-A(2:1)

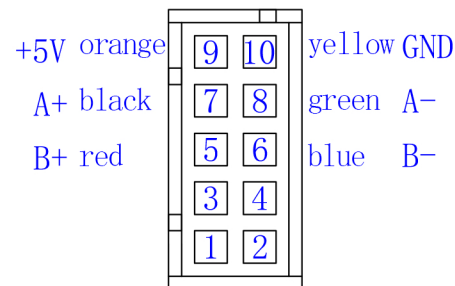

B-B(2:1)

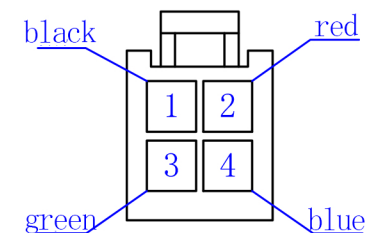

材质 MATERIAL	—	2							
表面处理 FINISH	—	1							
制图 DRAWN	设计 DESIGNED	检图 CHECKED	检印 CHECKED	比例 SCALE	FREE	品名 TITLE	电机规格书 MOTR SPECIFICATION		
凯福科技 '22-11-09	凯福科技 '22-11-09					图号 DWG. NO.	Y-22-1109-0		
宋志青	宋志青					广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.			1/1