

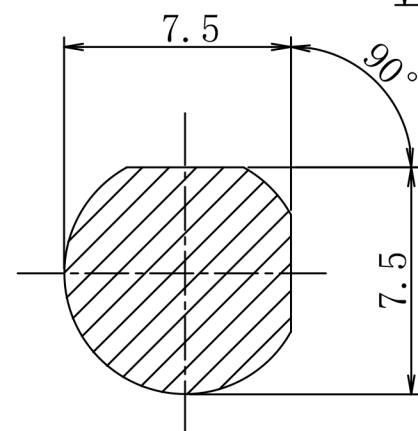
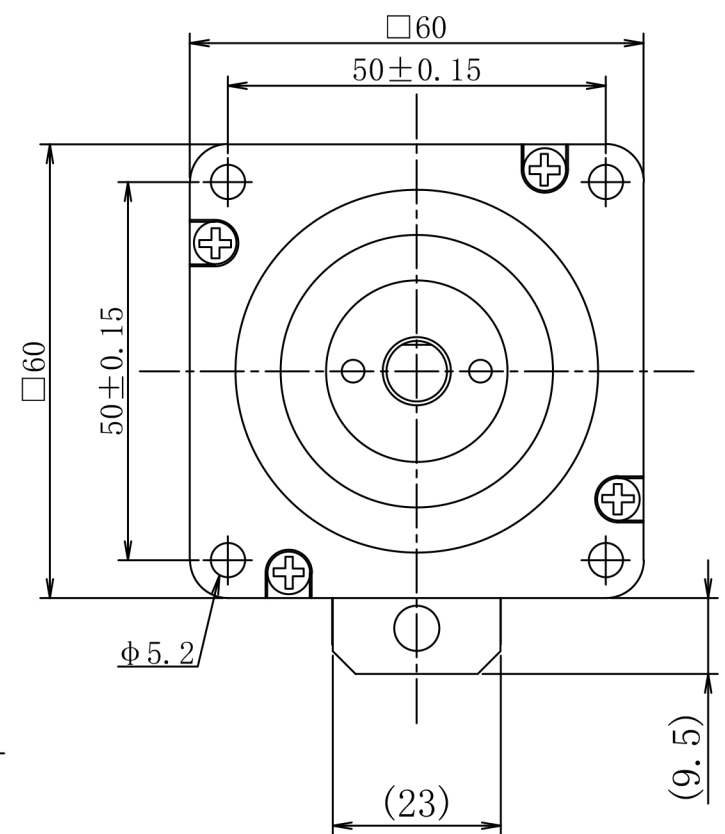
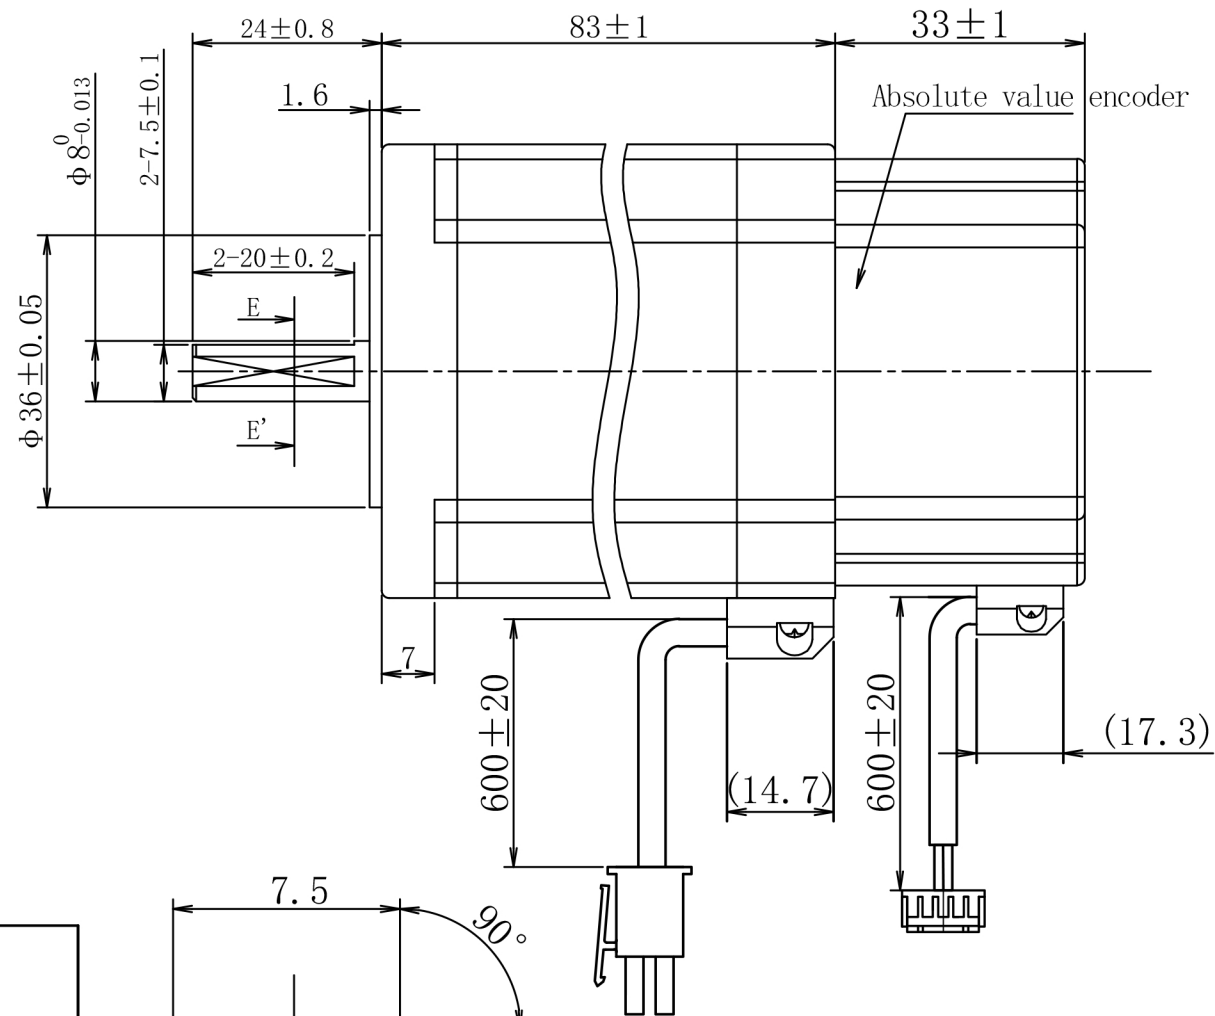


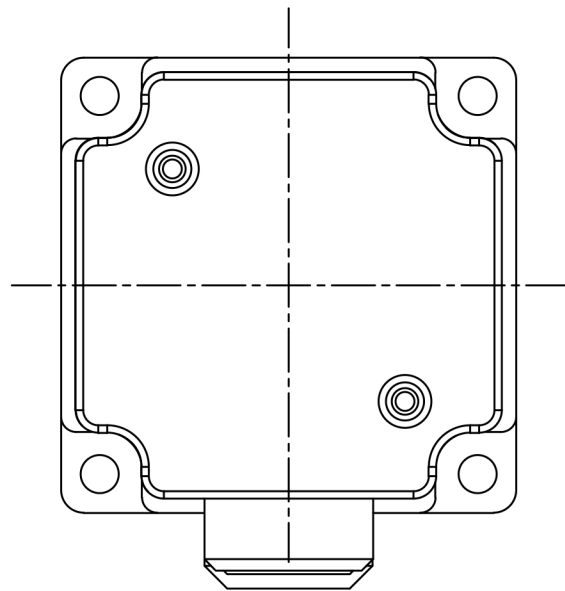


E-E' Section diagram (5:1)

Motor wire interface (D direction) :

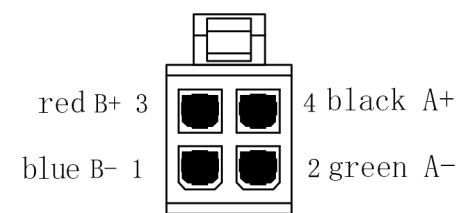

coupler : 5557 4.2 mm2x2P
terminal : 39-00-0038 (MOLEX)

Encoder signal end interface (D direction) :

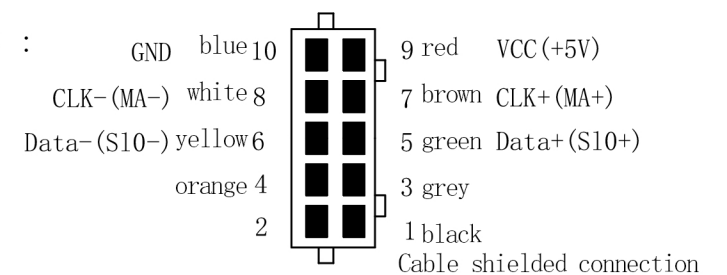


coupler : PHD-22x5P
terminal : DF11-2428SCF

Universal parameter

Step Angle	1.8°
Phase number	2
Insulation resistance	100MΩ min. (500V DC)
Insulation class	Class B
Moment of inertia	760g.cm ²
weight	1.3kg
Driving voltage	24V
Rated current	5.0A
Phase resistance	0.45Ω ±15%
Phase inductance	1.7mH±20%
Holding torque	2.6N.m
Positioning torque	80mN.m

Wiring diagram

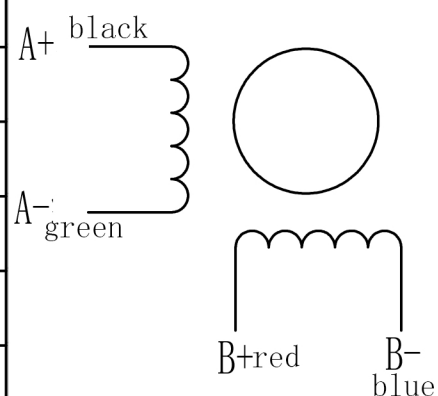

一般公差 TOLERANCES (EXCEPT AS NOTES)		± 0.3													
材 质 MATERIAL		————		2						Y09-60D83-5703E					
				1											
表面处理 FINISH		————		0	23-08-02	----	00初版						黎明勇		
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS			设计 BY			备 注 NOTE		
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE		FREE		品 名 TITLE		电机规格书 MOTR SPECIFICATION					
凯福科技 23-08-02		凯福科技 23-08-02						图 号 DWG. NO.		Y-23-0802-0					
黎明勇		黎明勇						广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.				页 SHEET		1/1	