



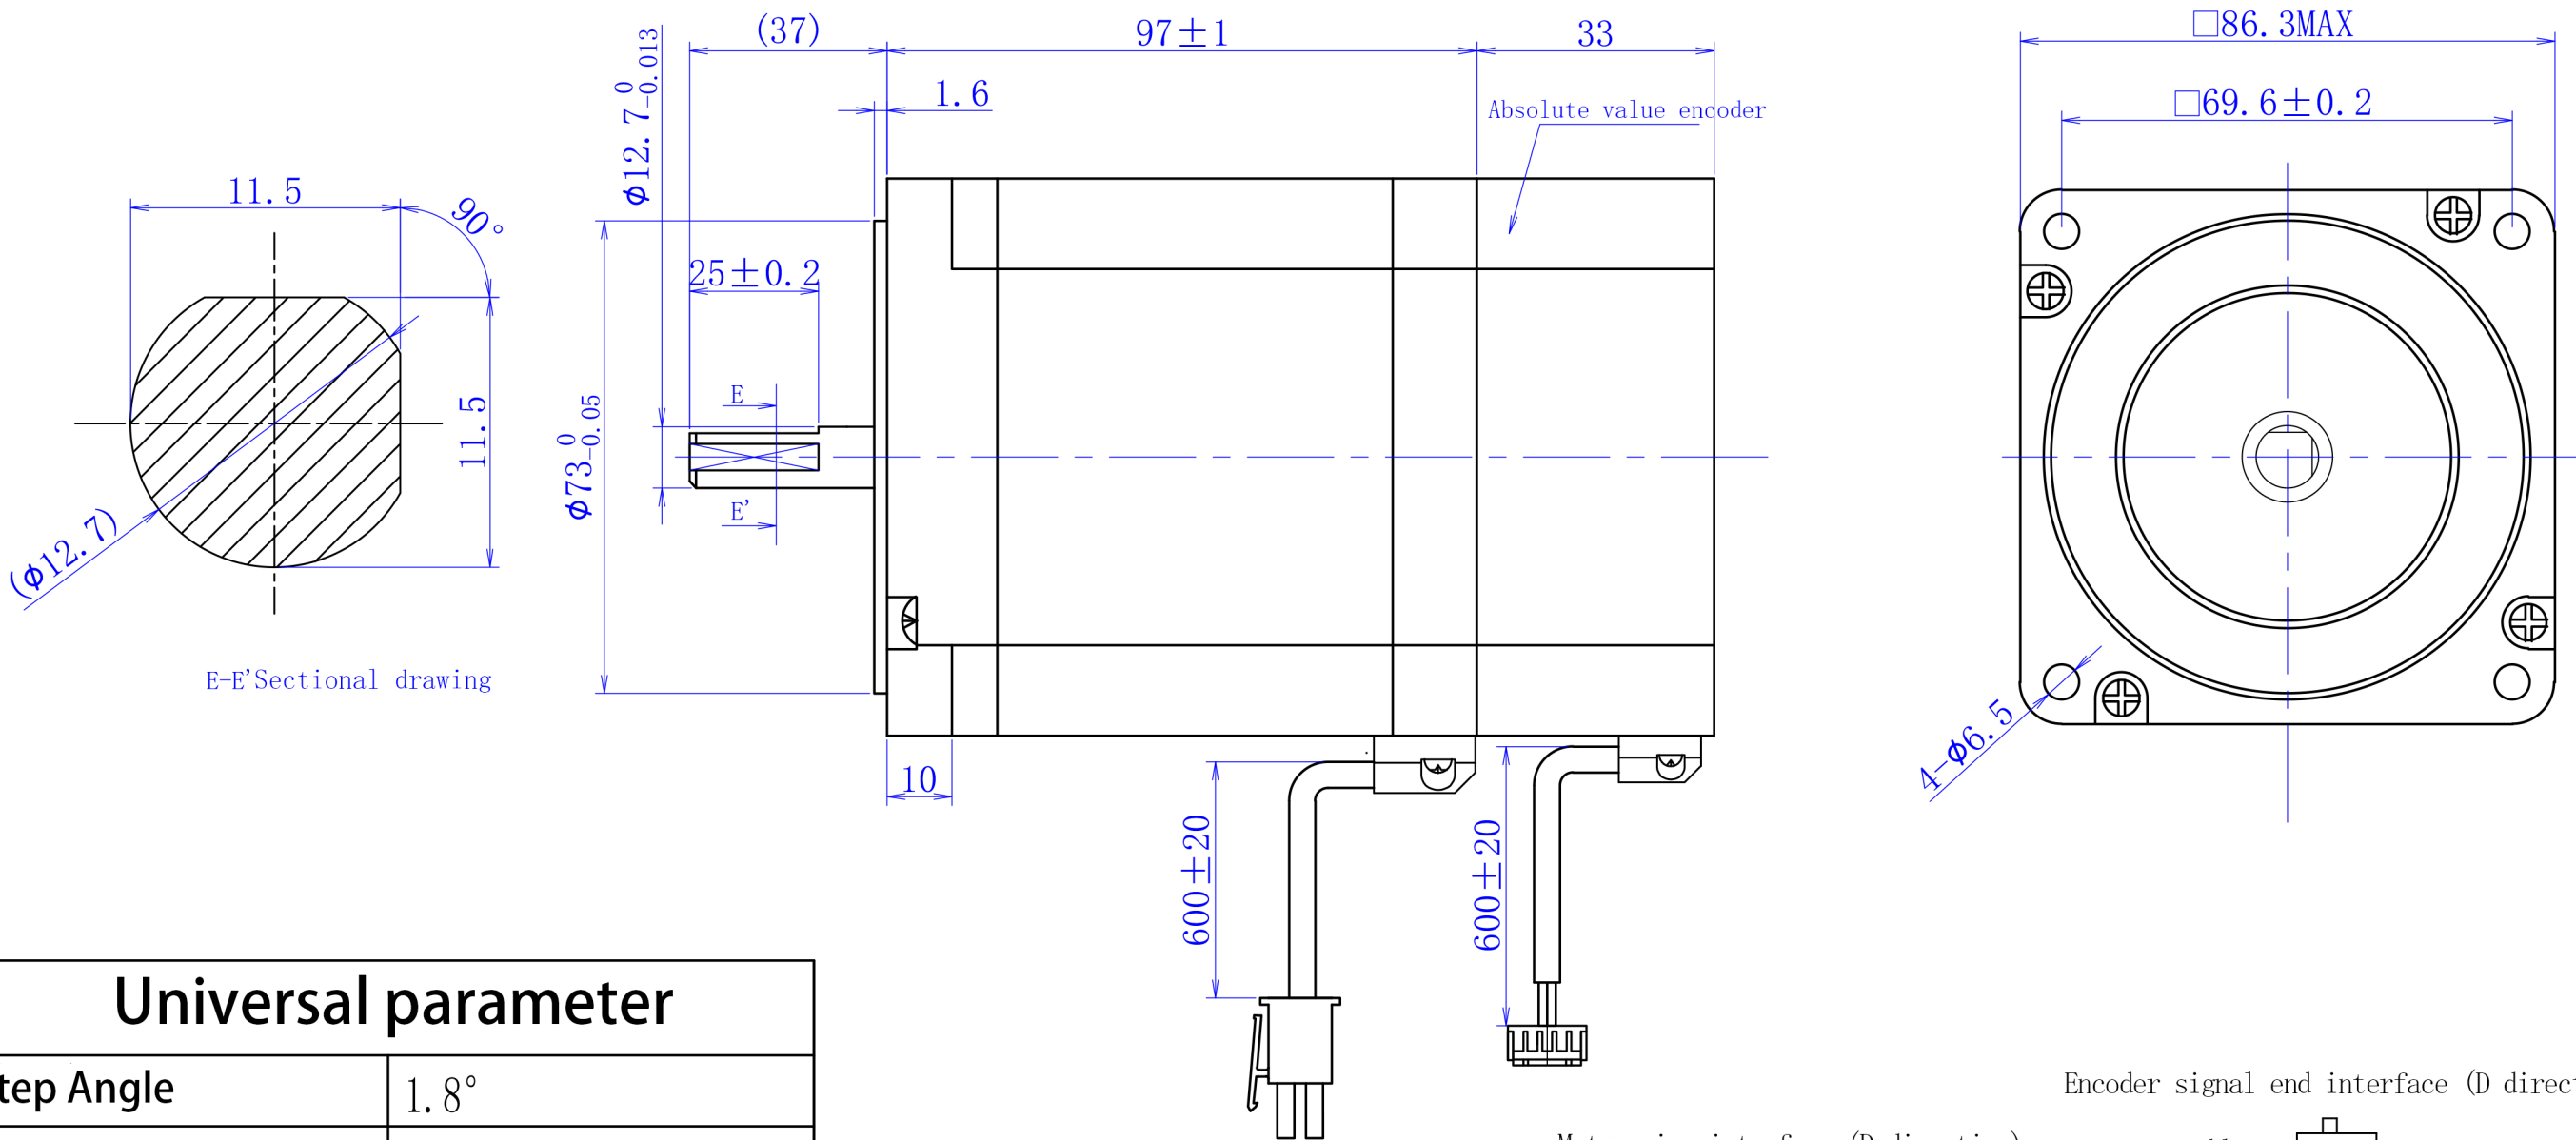


Universal parameter

Step Angle	1.8°
Phase number	2
Insulation resistance	100MΩ min. (500V DC)
Insulation class	Class B
Moment of inertia	1750g. cm ²
weight	2.7kg
Driving voltage	24V
Rated current	5.0A
Phase resistance	0.55Ω ±15%
Phase inductance	5.0mH±20%
Holding torque	6.5N. m
Positioning torque	150mN. m

Wiring diagram

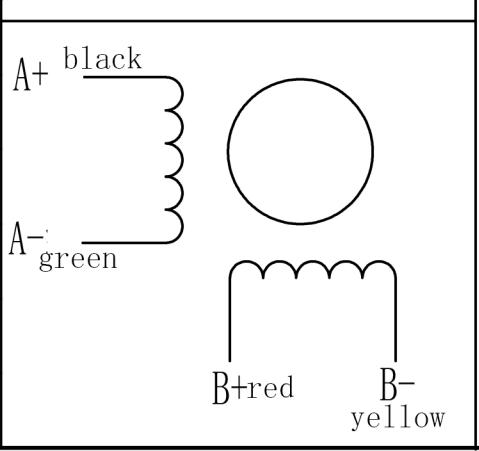


Motor wire interface (D direction) :

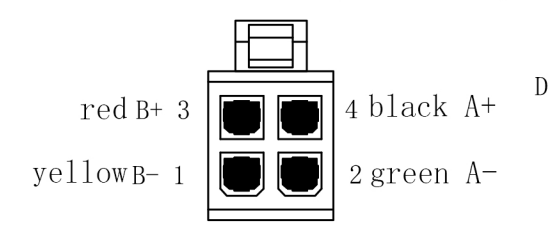

coupler : 5557 4.2 mm2x2P
terminal : 39-00-0038 (MOLEX)

Encoder signal end interface (D direction) :

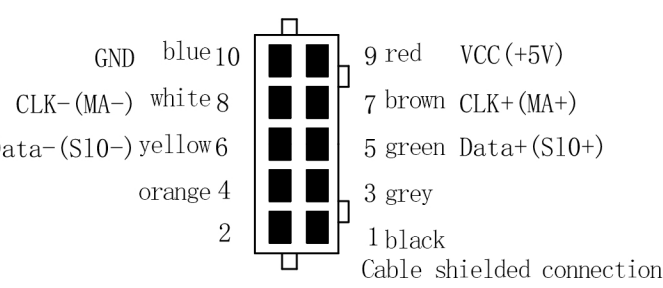

coupler : PHD-22x5P
terminal : DF11-2428SCF

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3												
材 质 MATERIAL		————		2							Y09-86D97-6303E			
				1										
表面处理 FINISH		————		0	23-04-04	----	00初版			黎明勇	备 注 NOTE			
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS		设计 BY					
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比例 SCALE		FREE		品 名 TITLE		电机规格书 MOTR SPECIFICATION				
												图 号 DWG. NO.		Y-23-0404-0
				广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.								页 SHEET	1/1	