


Product parameters:
Model: YK-R8016P-ASN-2-617
Stroke: $\pm 8^{\circ}$
Motor: STP-28D1012-01
Drive current: 0.7A
Screw type: Ball screw
Screw parameters: diameter 6mm/pitch 1mm
Resolution (Full/Half): $0.00775^{\circ}/0.003875^{\circ}$
Repetitive positioning accuracy: $\pm 0.015^{\circ}$
Concentricity: 0.03° (within $\pm 8^{\circ}$)
Flatness: 0.05° (within $\pm 8^{\circ}$)
Maximum speed: $30^{\circ}/s$
Material: Aluminum alloy
Load: 49N(5Kgf)
Weight: 0.8kg

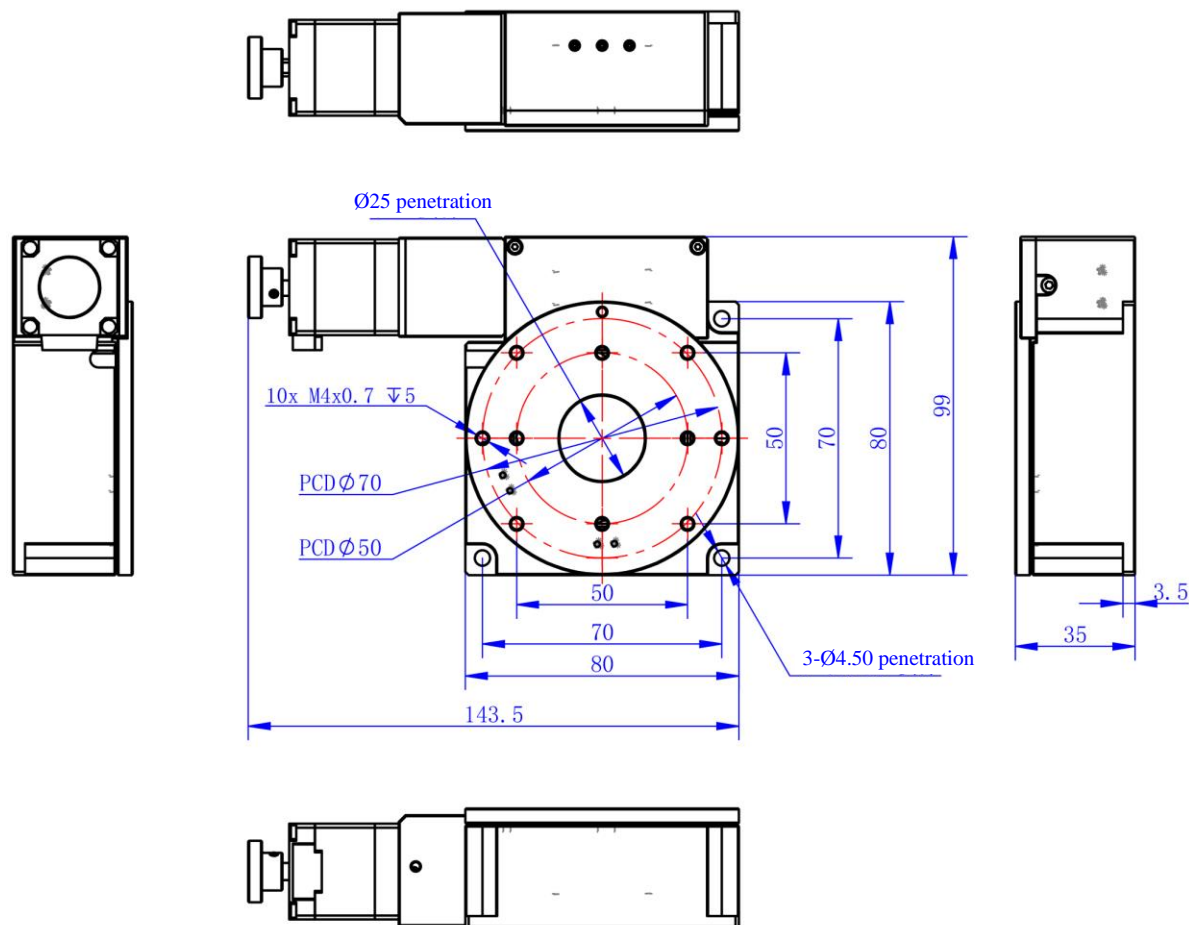

				YK-R8016P-ASN-2-617			
				Drawn by	Ye Zhendong	Page	1/1
				Review		Angle of view	
				Checked by		Tolerance	Unmarked tolerance grade 12
No.	Date	Change content	Designer	Guangdong Kaifull Electronics Technology Co., Ltd.			