Version	A

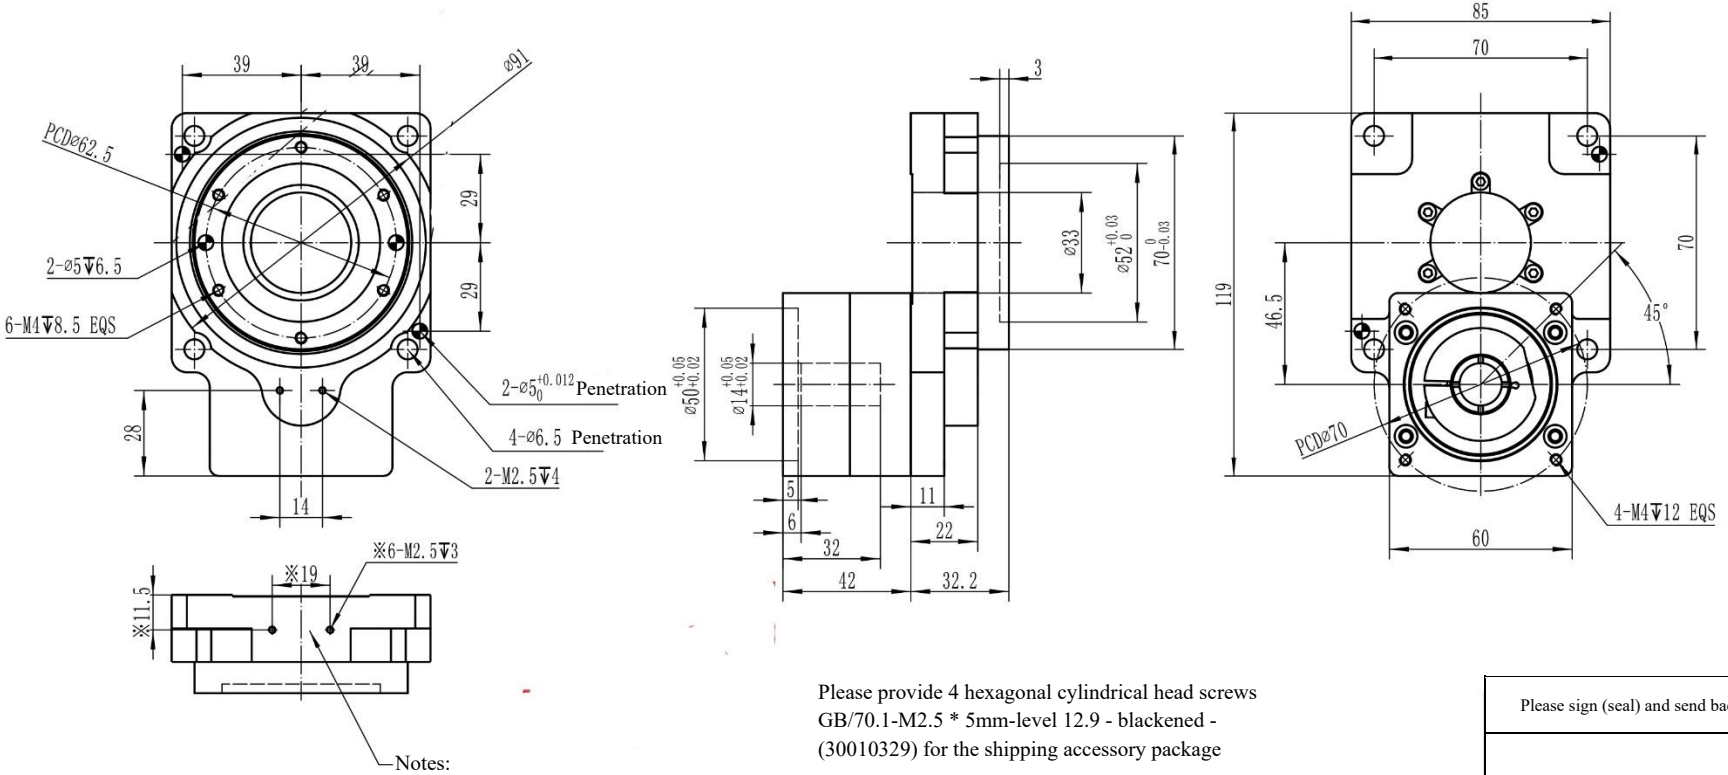

Notes:
The installation screws of the side induction switch must be M2.5*5 screws or M2.5*6 screws+flat washers. Otherwise, there may be a risk of not locking tightly or damaging the reducer gear!

Please provide 4 hexagonal cylindrical head screws GB/70.1-M2.5 * 5mm-level 12.9 - blackened - (30010329) for the shipping accessory package

Reduction ratio: 5
Permissible output torque: 12N.m
Permissible output speed: 200RPM
Permissible axial load: 500N
Repetitive positioning accuracy: ±15arc.sec
Platform end face runout: 0 01m
Protection level: IP40

*Continuous service life: 10000h

	Rework	Hollow rotating platform			Guangdong Kaifull Electronics Technology Co., Ltd.
	Rework				
	Rework	Angle of view			YKW86K-10V2
	Rework	Stage mark	Weight	Scale	
				1:1.5	10280209
Material name	Processing method				
Non-standard information bar		Page of			

Please sign (seal) and send back